


电缆接头 Cable gland

金属电缆接头/Metal Cable gland

材 料: 黄铜镀镍
 密 封 件: 丁腈橡胶
 防护等级: IP68
 温度范围: 静态: -40℃至100℃
 动态: -20℃至80℃

Material: Nickel-plated brass
 Seal Material: NBR
 Degree of protection: IP68
 Temperature range: Stat: -40℃ to 100℃
 Dyn: -20℃ to 80℃

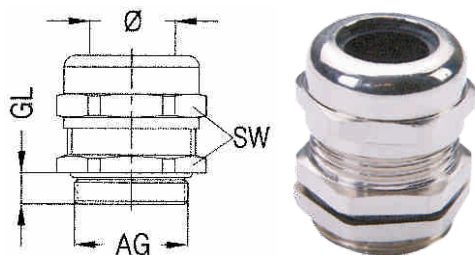


螺纹规格 Thread	卡口范围 ϕ Claping range	螺纹外径 AG	扳手尺寸 SW	螺纹长度 GL
PG制螺纹/PG Thread				
PG11	5-10	18.6	20	7
PG13.5	6-12	20.4	22	7.5
PG16	8-14	22.5	24	7.5
PG21	13-18	28.3	30	8
PG29	18-25	37.0	40	9.5
PG36	22-32	47.0	50	12
PG42	31-38	54.0	55	12
PG48	37-44	59.3	65	12
M公制螺纹/Metric				
M20X1.5	6-12	20	22	8
M25X1.5	13-18	25	30	8
M32X1.5	18-25	32	40	9
M40X1.5	22-32	40	50	12
M50X1.5	31-38	50	57	12
M63X1.5	37-44	63	65	12

塑料电缆接头/Plastics Cable gland

材 料: 尼龙
 密 封 件: 丁腈橡胶
 防护等级: IP68
 温度范围: 静态: -40℃至100℃
 动态: -20℃至80℃

Material: Nylon
 Seal Material: NBR
 Degree of protection: IP68
 Temperature range: Stat: -40℃ to 100℃
 Dyn: -20℃ to 80℃

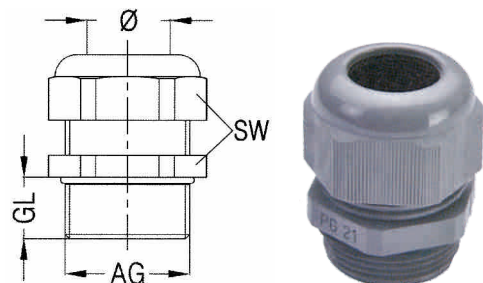

螺纹规格 Thread	卡口范围 ϕ Claping range	螺纹外径 AG	扳手尺寸 SW	螺纹长度 GL
PG制螺纹/PG Thread				
PG11	5-10	18.6	22	8
PG13.5	6-12	20.4	24	9
PG16	8-14	22.5	27	10
PG21	13-18	28.3	32	11
PG29	18-25	37.0	42	11
PG36	22-32	47.0	52	12
PG42	31-38	54.0	59	14
PG48	37-44	59.3	65	14
M公制螺纹/Metric				
M20X1.5	6-12	20	24	9
M25X1.5	13-18	25	32	11
M32X1.5	18-25	32	42	11
M40X1.5	22-32	40	52	12
M50X1.5	31-38	50	59	15
M63X1.5	37-44	63	65	14