




宁波速普电子有限公司

NINGBO SUPU ELECTRONICS.CO.,LTD

产品规格书
Product Specification

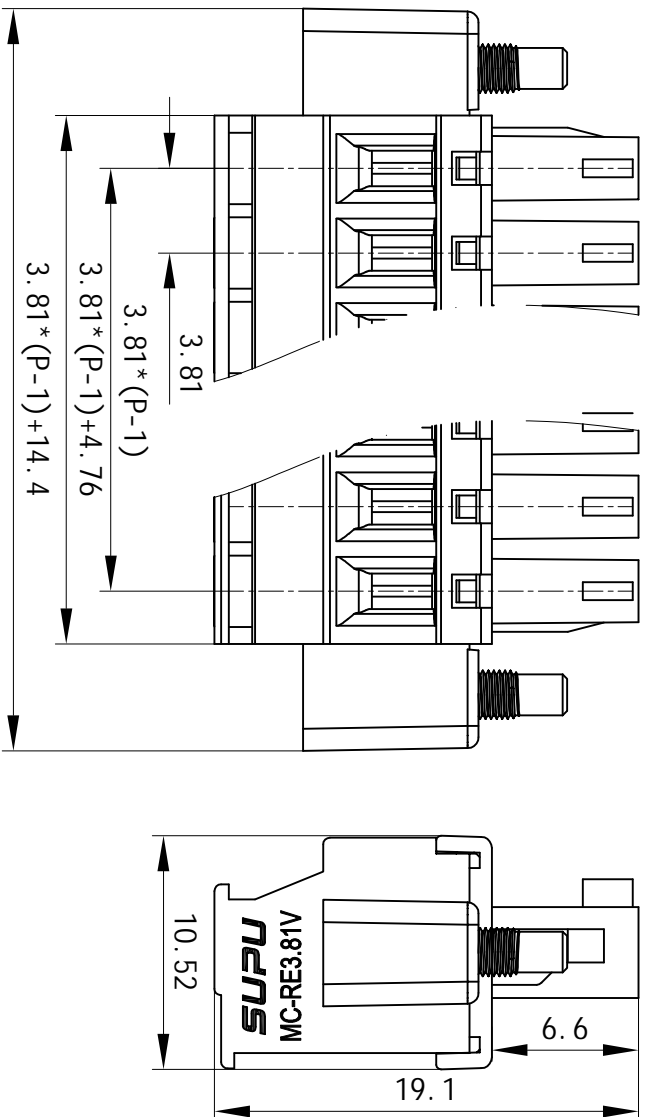

订货信息 Order Info

订货号 PART NUMBER	通道数 NO. OF POS	颜色 COLOR
MC-RE3. 81VXXC-K	2-20	绿色/Green
长注公差参照GB/T14486		
0-3	>3-6	>6-10
±0.08	±0.09	±0.10
>18-24	>24-30	>30-40
±0.16	±0.18	±0.21
>80-100	>100-120	>120-140
±0.36	±0.41	±0.46
		±0.51
		±0.56
		±0.62
		±2°

IEC 额定数据/IEC Rated data	
接线范围/Wire range	0.2-1.5mm ²
单股导线/Solid	0.2-1.5mm ²
软导线/Stranded	0.2-1.5mm ²
带端头软导线/Stranded with ferrules without plastic sleeve	0.2-1.5mm ²
带预绝缘端头软导线/Stranded with ferrules with plastic sleeve	0.2-0.5mm ²
剥线长度/Strip length	7-8mm
过电压等级/Overvoltage level	III III I1
污染等级/Pollution level	3 2 2
额定电压/Rated voltage	160V 160V 320V
额定脉冲耐受电压/Rated surge voltage	2.5KV 2.5KV 2.5KV
额定电流/Rated current	8A 8A 8A
UL 额定数据/UL Rated data	B C D
额定电流/Rated current	8A - 8A
额定电压/Rated voltage	300V - 300V
接线范围/Wire range	AWG30-14
其他信息/Other information	
塑件/Housing	PA66
触点材料/Contact	铜合金/Copper Alloy
镀层/Coating	镀锡/Tin-plated
螺钉类型/Screw thread	M2 M2.5
扭矩/Tightening torque	0.2-0.25N•m 0.3-0.4N•m
阻燃等级/Flame retardant rating	UL94-V0
使用环境温度/Usage ambient temperature	-25℃ - +70℃
储存及运输环境温度/Storage ambient temperature	-40℃ - +85℃
认证/Approval	

单位/Unit	mm
Rev	01
Name	MC-RE3. 81VXXC-K 系列2-20位通道孔型连接器 MC-RE3. 81VXXC-K Female Connector