



## Заклёпки-гайки шестигранные с уменьшенным потайным бортиком (заклёпки резьбовые)

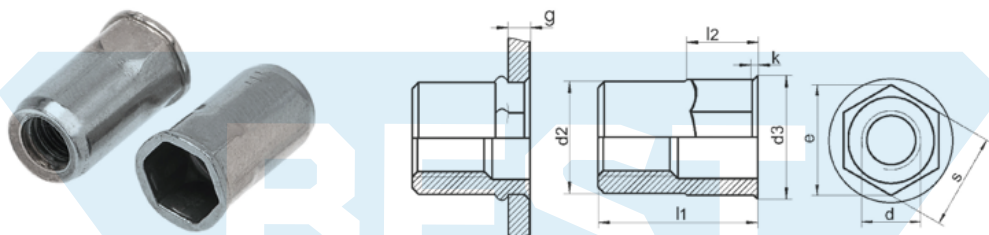

d	l1	d2	d3	l2	k	e	g	Нсрез [Н]	Нрастяж [Н]	s
3	9,0	5,0	5,6	4,5	0,35	5,3	0,3-1,5	2058	5761	5
4	12,0	6,0	7,0	6,0	0,60	6,5	0,5-2,0	2940	8230	6
5	14,0	7,0	8,0	7,5	0,60	7,6	0,5-2,5	3820	11760	7
6	16,0	8,9	10,0	6,3	0,60	10,0	0,5-3,0	3430	21570	9
8	17,0	10,9	12,0	6,8	0,60	12,1	0,5-3,0	4900	24510	11
10	20,5	12,9	14,0	9,0	0,60	14,7	1,0-4,0	5000	47070	13
12	24,0	15,9	17,5	9,3	0,60	17,6	1,0-4,0	5250	49423	16

Материал	
A2	250
A2	250
A2	250
A2	250
A2	250
A2	250
A2	250

\*g – установочная толщина