



Винты с цилиндрической головкой с радиальными отверстиями

прямой шлиц

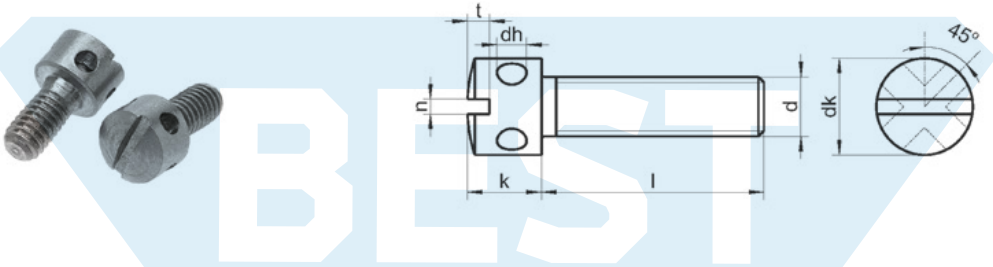

dk	5,5	7,0	8,5	10,0
dh	1,5	2,0	2,5	3,0
k	4,0	5,0	6,5	8,0
t min	1,0	1,4	1,7	2,2
n	0,8	1,0	1,2	1,6

l/d	M3	M4	M5	M6
4	A1			
5	A1	A1		
6	A1	A1		
8	A1	A1	A1	
10	A1	A1	A1	A1
12	A1	A1	A1	A1
16	A1	A1	A1	A1
20	A1	A1	A1	A1
25		A1	A1	A1
30		A1	A1	A1
	200	100	50	50

* для этого изделия A1 = сталь 1.4305 по EN 10088