




ФРЕЗЫ ШПОНОЧНЫЕ Ц/Х HÖRTZ


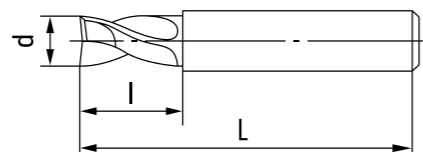


Материал: быстрорежущая сталь P6M5 ГОСТ 9140-78

КОД	d	L	l	КОД	d	L	l
351943	3	37	5	351951	14	73	16
351944	4	39	7	351952	16	79	19
351945	5	42	8	351953	18	79	19
351946	6	52	8	351954	20	88	22
351947	7	54	10	351955	22	88	22
351948	8	55	11	351956	25	102	26
351949	10	63	13	351957	28	102	27
351950	12	73	16				



ФРЕЗЫ ШПОНОЧНЫЕ К/Х HÖRTZ

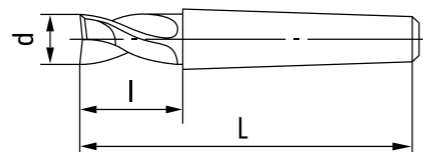


Материал: быстрорежущая сталь P6M5 ГОСТ 9140-78

КОД	d	L	l	КМ	КОД	d	L	l	КМ
351924	10	83	13	1	351934	22	124	22	3
351925	12	86	16	1	351935	25	128	26	3
351926	12	101	16	2	351936	28	128	26	3
351927	14	86	16	1	351937	32	134	32	3
351928	14	101	16	2	351938	32	157	32	4
351929	16	104	16	2	351939	36	134	32	3
351930	18	104	19	2	351940	36	157	32	4
351931	20	107	22	2	351941	40	163	38	4
351932	20	124	22	3	351942	40	195	60	5
351933	22	107	22	2					



ТИСКИ СТАНОЧНЫЕ ПОВОРОТНЫЕ (ТИП А) С РУЧНЫМ ПРИВОДОМ, ИСПОЛНЕНИЕ 2 HÖRTZ

ГОСТ 16518-96

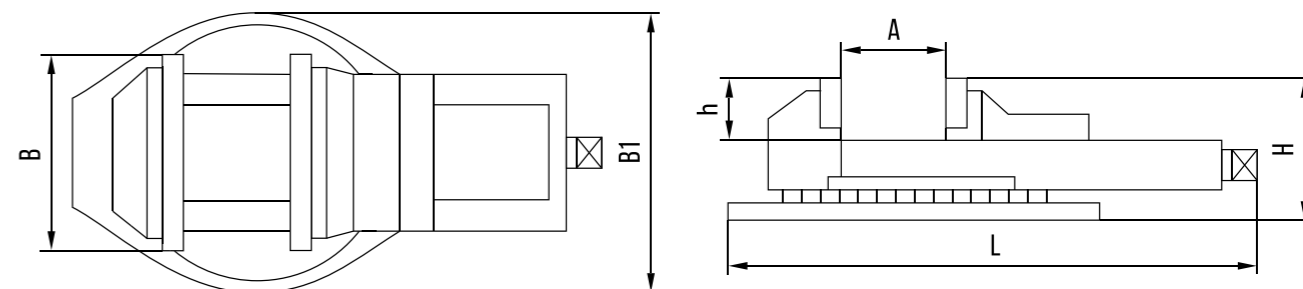

КОД	ШИРИНА ГУБОК, В	ВЫСОТА ГУБОК, h	ХОД ГУБОК, А	МАКСИМАЛЬНОЕ УСИЛИЕ ЗАЖИМА	ГАБАРИТНЫЕ РАЗМЕРЫ, ДхШхВ, LxB1xH	МАССА
104462	125	40	95	24	297x166x126	14
104463	160	52	120	29	411x222x166	28
104464	200	63	150	34	453x242x183	38
104465	250	64	270	40	573x290x189	48
104466	320	81	350	54	695x360x206	69

