


DIN 8140-1 Вставка резьбовая проволоочная пружинная из нержавеющей стали

Form A

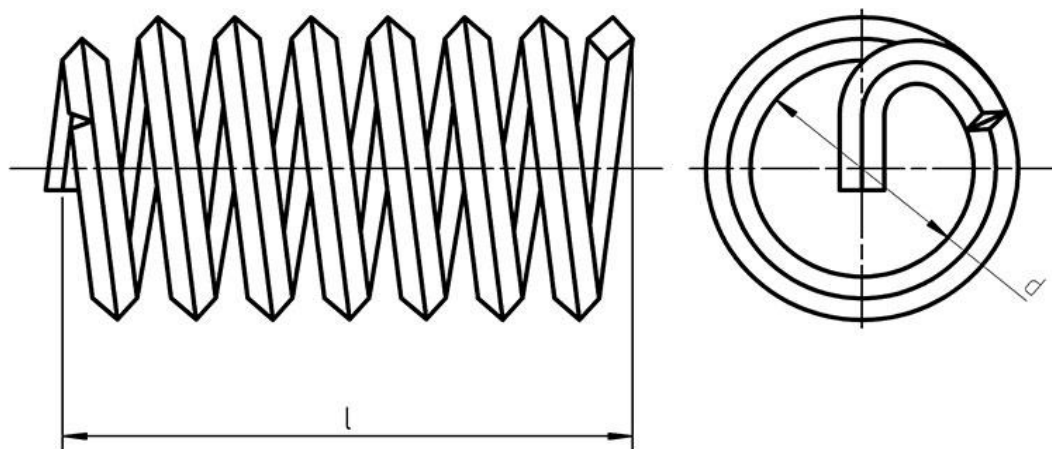

Обозначения:

d — внутренний (номинальный) диаметр резьбы вставки

L — номинальная длина

d_1 — наружный диаметр резьбовой вставки в свободном состоянии

d	шаг резьбы	L, мм					d1, мм		Рекомендуемый диаметр сверления, мм
		1 d	1,5 d	2 d	2,5 d	3 d	min	max	
M2	0,4	2,0	3,0	4,0	5,0	6,0	2,6	2,8	2,1
M3	0,5	3,0	4,5	6,0	7,5	9,0	3,8	4,0	3,2
M4	0,7	4,0	6,0	8,0	10,0	12,0	5,15	5,35	4,2
M5	0,8	5,0	7,5	10,0	12,5	15,0	6,35	6,6	5,2
M6	1,0	6,0	9,0	12,0	15,0	18,0	7,6	7,85	6,3
M7	1,0	7,0	10,5	14,0	17,5	21,0	8,65	8,9	7,3
M8	1,25	8,0	12,0	16,0	20,0	24,0	9,85	10,1	8,4
	1,0								
M9	1,25	9,0	13,5	18,0	22,5	27,0	10,85	11,1	9,4
	1,0								
M10	1,5	10,0	15,0	20,0	25,0	30,0	12,1	12,5	10,5
	1,0								
	1,25								
M12	1,75	12,0	18,0	24,0	30,0	36,0	14,4	14,8	12,5
	1,0								
	1,25								
M14	1,5	14,0	21,0	28,0	35,0	42,0	16,8	17,2	14,5
	1,0								
	1,25								
M16	2,0	16,0	24,0	32,0	40,0	48,0	19,0	19,4	16,5
	1,5								
M18	2,5	18,0	27,0	36,0	45,0	54,0	21,5	22,0	18,75
	1,5								
	2,0								
M20	2,5	20,0	30,0	40,0	50,0	60,0	23,7	24,2	20,75
	1,5								
M22	2,5	22,0	33,0	44,0	55,0	66,0	26,3	26,8	22,75
	1,5								
M24	3,0	24,0	36,0	48,0	60,0	72,0	28,6	29,1	24,75
	1,5								
	2,0								
M27	3,0	27,0	40,5	54,0	67,5	81,0	32,2	32,7	27,75
M30	3,5	30,0	45,0	60,0	75,0	90,0	35,2	35,7	31,0
M33	2,0	33,0	49,5	66,0	82,5	99,0	38,3	38,8	34,0
M36	4,0	36,0	54,0	72,0	90,0	108,0	42,1	42,6	37,0
	2,0								
M39	4,0	39,0	58,5	78,0	97,5	117,0	45,1	45,6	40,0
	2,0								