



Цепи короткозвенные

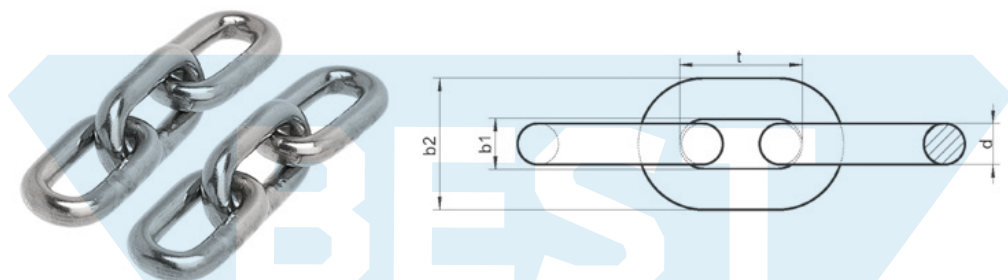

d	t	b1	b2	P, кг	N max, кН
2	12,0	3,4	8,0	50	2,0
3	16,0	3,6	10,2	110	4,4
4	16,0	4,8	13,6	200	8,0
5	18,5	6,0	17,0	320	12,5
6	18,5	7,2	20,4	400	16,0
7	22,0	8,0	23,0	625	25,0
8	24,0	9,6	27,2	800	32,0
10	28,0	12,0	36,0	1250	50,0
13	36,0	15,0	44,0	2000	80,0
16	46,0	17,0	51,7	3250	130,0

Материал	
A4	100
A4	100
A4	50
A4	50
A4	50
A4	50
A4	50
A4	50
A4	50
A4	50
A4	50

* d 2мм и d 3мм согласно DIN 5685

** P - рекомендуемая производителем масса груза

*** N max - предельная разрушающая нагрузка