

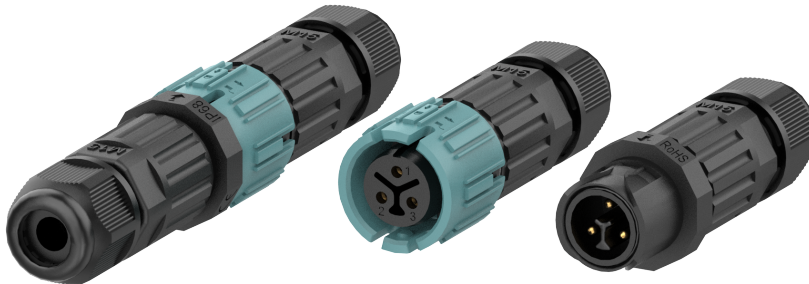
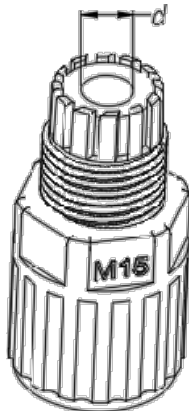
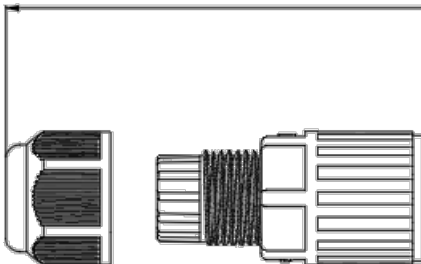






1		2		3		4		5		6		7		8							
Raw Material		PA66、SILICONE、COPPER ALLOY		3 PIN  Female connector Male connector 		REV		DESCRIPTION		DESIGN		DATE									
Certification		CQC/RoHS/CE				AO		NEW DRAWING		EDDIE		2022/4/4									
Flame-resistant rating		UL94 V-0																			
Level of protection		IP68																			
Voltage rating/Current rating		450 V / 10 A																			
Withstanding voltage		2500 V																			
Cable gauge		0.5~1.5mm²																			
Operating temperature		-40~105 °C																			
Part Number		Rubbers Diameter(d)		Outer Cable Diameter		Factory: Xiamen Fucon IMP.&EXP. CO.,LTD Waterproof coupling (female connector and male connector for lighting) with screw copper alloy clamps for two cables Part No.: EW-M15MF-03X01 EW-M15MF - series of waterproof couplin (female connector and male connector) 03 - number of Pins (3 Pins) X01 - no value															
		φ 6.5 mm		φ 3.5~7 mm																	
		φ 4.5 mm		φ 2.5~4.5 mm																	
Rubbers Diameter      																					
21.8 g		42x30x34 cm		600 PCS		14.08Kg		TOLERANCE UNSPECIFIED		UNIT		mm		DRAW		P/N		ES-M15-MF			
Weight		MEAS		Each carton number		G. W.		X. ±0.35 X.XX ±0.10 X.° ±3°		SCALE		1:1		CHKD		D/N					
								X.X ±0.20 X.XXX ±0.05 X.XX° ±1°		SHEET		1/1		APPD		TITLE		EW-M15MF-3P WATERPROOF CONNECTOR			
1		2		3		4		5		6		7		8							