

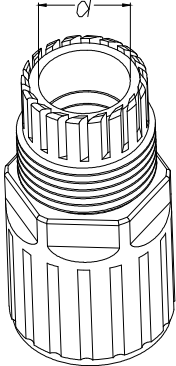
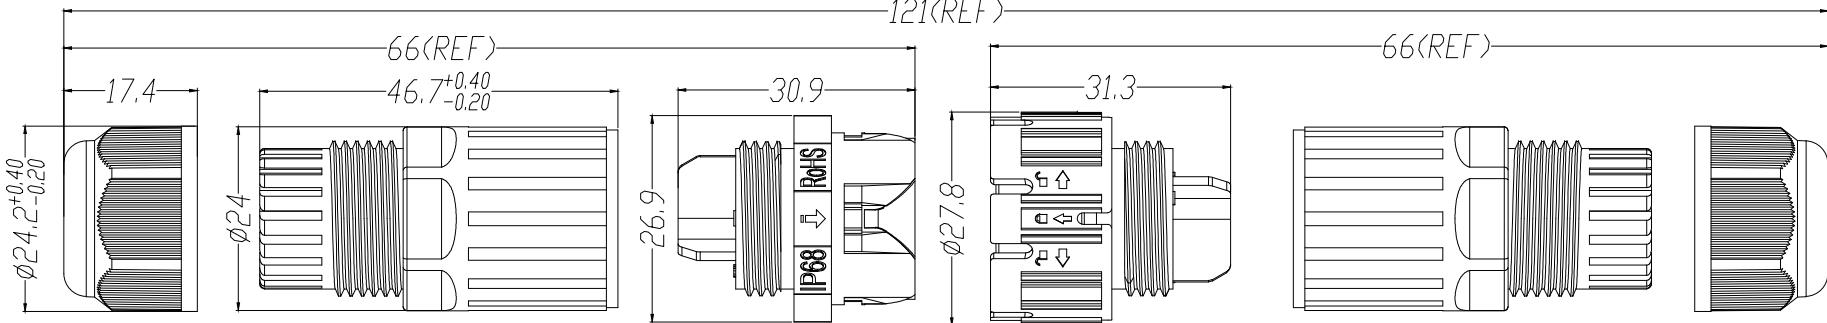



1		2		3		4		5		6		7		8												
A	原材料 Raw material		PA66、BRASS、SILICONE		4 Pin  母端插孔 Pole Female connector  公端插针 Pin Male connector		版本 (REV)		说明 (DESCRIPTION)		设计 (DESIGN)		DATE													
	X1		NEW DRAWING				PDH		2021/03/22																	
B	符合认证标准 CERTIFICATION		UL/TUV/RoHS		 																					
	阻燃等级 Flame-resistant rating		UL94-V0																							
	防护等级 Level of protection		IP68																							
	额定电压/额定电流 Voltage rating/Current rating		450V / 15A																							
	耐电压 Withstanding voltage		1000V																							
	线材规格 Cable gague		0.5mm ² ~2.5mm ²																							
C	工作温度 Operating temperature		-40℃ ~+105℃																							
D	胶塞孔径d Rubbers Diameter		适用线外径 Outer Cable Diameter																							
	ø11.5		ø9-12																							
	ø8.5		ø5-9																							
E	胶塞孔径d Rubbers Diameter																									
F	产品单重 Weight		外箱尺寸 MEAS		单箱数量 Each carton number		单箱毛重 G. W.		未注公差 (TOLERANCE UNSPECIFIED)		单位 (UNIT)		mm		绘图 (DRAW)		彭冬华 / 2021/03/22		料号 (PART NO)		EW-M23-4P-MF		FUCON			
	g		42×30×26 cm		500 pcs		18.2kg		X. ±0.35 X. XX ±0.10 X. ° ±3° X. X° ±2° X. XX° ±1°				比例 (SCALE)		1:1		审核 (CHKD)				图号 (DWG NO)				EW-M23-4P-MF	
													页次 (SHEET)		1/1		核准 (APPD)				品名 (TITLE)				自锁式 公母对插款M23 4芯 Auto-connection male and female plug M23 of 4 Pin	
1		2		3		4		5		6		7		8												