


Свёрла укороченные двухсторонние с кобальтом

быстрорежущая сталь HSS-E с содержанием Co до 5%*

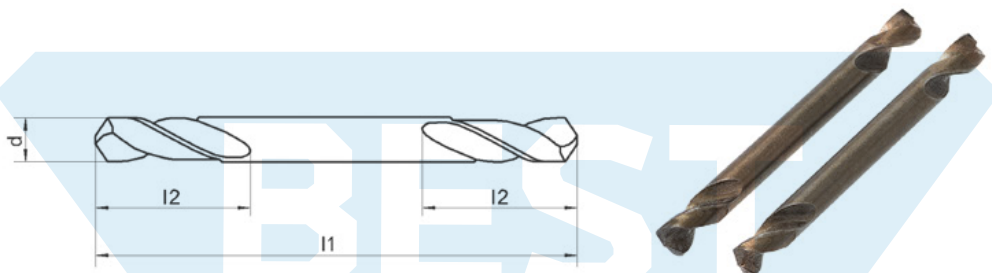

Наименование изделия	d	l1	l2
HSS-E D 2,0X38	2,0	38	9,5
HSS-E D 2,5X43	2,5	43	9,5
HSS-E D 3,0X46	3,0	46	9,5
HSS-E D 3,2X49	3,2	49	9,5
HSS-E D 3,5X52	3,5	52	13,0
HSS-E D 3,8X55	3,8	55	13,0
HSS-E D 4,0X55	4,0	55	13,0
HSS-E D 4,2X55	4,2	55	13,0
HSS-E D 4,5X58	4,5	58	16,0
HSS-E D 4,8X62	4,8	62	16,0
HSS-E D 5,0X62	5,0	62	16,0
HSS-E D 5,5X66	5,5	66	16,0
HSS-E D 6,0X66	6,0	66	16,0
HSS-E D 6,5X70	6,5	70	22,0
HSS-E D 7,0X74	7,0	74	24,0
HSS-E D 8,0X79	8,0	79	26,0
HSS-E D 9,0X84	9,0	84	28,0
HSS-E D 10,0X89	10,0	89	30,0
HSS-E D 12,0X102	12,0	102	36,0

Материал	
HSS-E	10
HSS-E	10
HSS-E	10
HSS-E	10
HSS-E	10
HSS-E	10
HSS-E	10
HSS-E	10
HSS-E	10
HSS-E	10
HSS-E	10
HSS-E	10
HSS-E	10
HSS-E	10
HSS-E	10
HSS-E	10
HSS-E	10
HSS-E	10
HSS-E	10
HSS-E	10

* для сверления нержавеющей и углеродистых сталей, а также алюминиевых сплавов