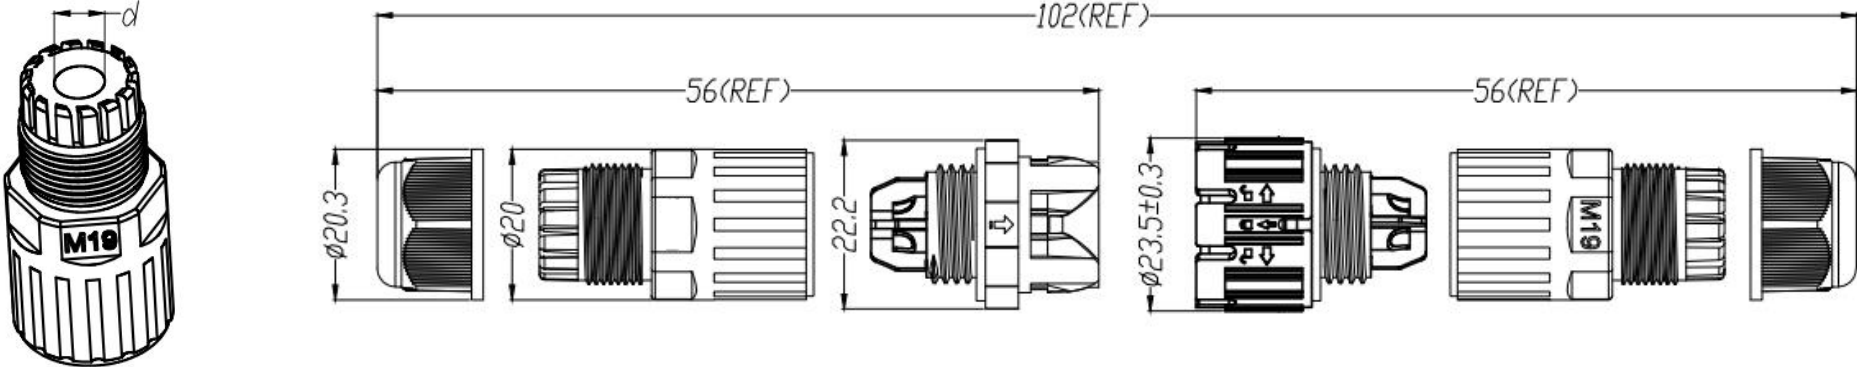


1		2		3		4		5		6		7		8														
A	Raw Material		PA66、SILICONE、 COPPER ALLOY		5 PIN  Pole Female connector Pin Male connector								REV	DESCRIPTION		DESIGN	DATE											
	Certification		UL/CQC/RoHS/CE										A0	NEW DRAWING		Andy. Pi	2022/4/7											
	Flame-resistant rating		UL94 V-0																									
	Level of protection		IP68																									
	Voltage rating/Current rating		450 V / 16 A																									
B	Withstanding voltage		2500 V		Factory: Xiamen Fucon IMP&EXP CO.,LTD Waterproof coupling (female connector and male connector for lighting) with screw copper alloy clamps for two cables Part No.: EW-M19MF-05X01 EW-M19MF - series of waterproof coupling (female connector and male connector) 05 - number of Pins (5 Pins) X01 - no value The color of the product is subject to the actual product, the picture is for reference only																							
	Cable gague		0.5~1.5mm²																									
	Operating temperature		-40~105 ℃																									
C	Part Number		Rubbers Diameter(d)		Outer Cable Diameter																							
			φ 10.2 mm		φ 7~10 mm																							
			φ 8.1 mm		φ 5~8 mm																							
			φ 6.5 mm		φ 3.5~7 mm																							
D	Rubbers Diameter																											
																												
E																												
F																												
22.25 g		42x30x26 cm		1000 PCS		22.95 Kg		TOLERANCE UNSPECIFIED		UNIT	mm	DRAW	P/N	EW-M19MF-05X01		FUCON												
								SCALE		1:1	CHKD	D/N																
Weight		MEAS		Each carton number		G. W.		X. ±0.35 X.XX ±0.10 X.° ±3° X.X ±0.20 X.XXX ±0.05 X.X° ±2° X.XX° ±1°		SHEET		1/1	APPD	TITLE	EW-M19MF-5P WATERPROOF CONNECTOR													
1		2		3		4		5		6		7		8														