



# 154 | 204 | 404 GRANITE DRILL BIT PRIMUS



## DRIVE




## EXECUTION



- ISO 5468
- Straight flute entry
- Milled flute for optimum removal of drilling dust
- High-temperature brazing at about 1.120°C
- Burnished and ground surface

## FOR USE IN

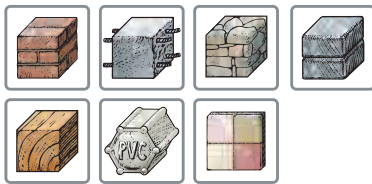

## APPLICATION

- In all rotary and percussion drilling machines
- For drilling plug holes
- Particularly suitable for fastenings

## PACKAGING



[145]

[163]

## Comments

- SW = Hexagonal clamping shank with 45 mm length / wrench size

D Ø mm	D Ø "	L2 mm	L1 mm	SW mm	d Ø mm	EA	EAN 4016707	12345
3,0	1/8	40	70		2,8	20	190018	154 000 030
3,5	9/64	40	70		3,2	20	190209	154 000 035
4,0	5/32	40	75		3,6	20	190025	154 000 040
4,5	11/64	50	85		4,1	20	190193	154 000 045
5,0	3/16	50	85		4,6	20	190032	154 000 050
5,0	3/16	110	150		4,6	10	192005	204 000 050
5,5	7/32	50	85		5,1	20	190049	154 000 055
5,5	7/32	110	150		5,1	10	192074	204 000 055
6,0	15/64	60	100		5,6	20	190056	154 000 060
6,0	15/64	110	150		5,6	10	192012	204 000 060
6,5	1/4	60	100		6,1	20	190063	154 000 065
6,5	1/4	110	150		6,1	10	192029	204 000 065
7,0	9/32	60	100		6,6	20	190070	154 000 070
8,0	5/16	80	120		7,1	20	190087	154 000 080
8,0	5/16	135	200		7,3	10	192036	204 000 080
8,0	5/16	350	400		7,3	1	194016	404 000 080
9,0	11/32	80	120		8,1	20	190094	154 000 090
10,0	3/8	80	120		8,7	20	190100	154 000 100
10,0	3/8	135	200		8,7	10	192043	204 000 100
10,0	3/8	350	400		9,3	1	194023	404 000 100
11,0	7/16	90	150		10,0	10	190186	154 000 110
12,0	15/32	90	150		10,0	10	190117	154 000 120
12,0	15/32	135	200		10,0	10	192050	204 000 120
12,0	15/32	350	400	10,00		1	194030	404 000 120
13,0	1/2	90	150		10,0	10	190124	154 000 130
14,0	9/16	90	150		10,0	10	190131	154 000 140
14,0	9/16	350	400	10,00		1	194054	404 000 140
15,0	19/32	90	150		10,0	10	190148	154 000 150
16,0	5/8	90	150		10,0	10	190155	154 000 160
16,0	5/8	350	400	10,00		1	194061	404 000 160
18,0	11/16	100	160		10,0	5	190162	154 000 180
20,0	3/4	100	160		13,0	5	190179	154 000 200