



1		2		3		4		5		6		7		8					
原材料 Raw material 符合认证标准 CERTIFICATION 阻燃等级 Flame-resistant rating 防护等级 Level of protection 额定电压/额定电流 Voltage rating/Current rating 耐电压 Withstanding voltage 线材规格 Cable gague 工作温度 Operating temperature PA66、BRASS、SILICONE UL/TUV/RoHS UL94-V2 IP68 450V / 16A 1000V 0.5mm² ~2.5mm² -40℃ ~+105℃ 3 Pin  主体 subject 										版本 (REV)		说明 (DESCRIPTION)				设计 (DESIGN)		DATE	
										X1		NEW DRAWING				DWG		2021/05/12	

胶塞孔径d Rubbers Diameter		适用线外径 Outer Cable Diameter	
ø11.5		ø9-12	
ø8.5		ø5-9	

胶塞孔径d
Rubbers Diameter




Factory: Xiamen Fucon IMP.&EXP. CO.,LTD


Waterproof connector (coupling for lighting) with
spring brass clamps for three cables

Part No.: EW-P20T-3P

EW-P20T - series of waterproof connector (coupling)

3P - number of Pins (3 Pins)

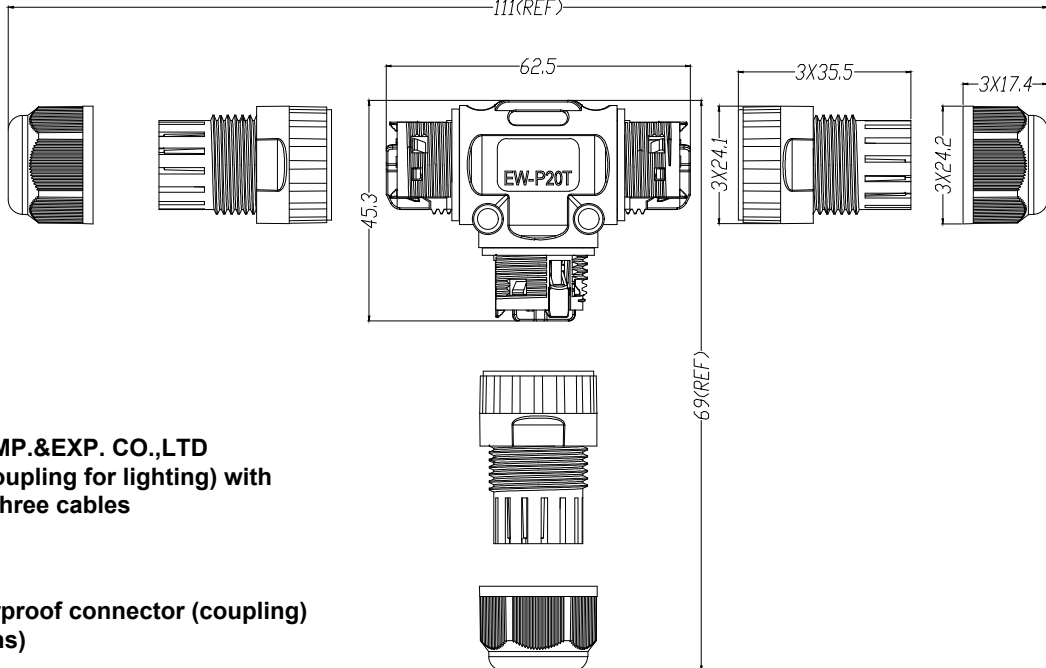

产品单重 Weight		外箱尺寸 MEAS		单箱数量 Each carton number		单箱毛重 G. W.		未注公差 (TOLERANCE UNSPECIFIED)				单位 (UNIT)		mm		绘图 (DRAW)		区文贵 / 2021/05/12		料号 (PART NO)		EW-P20T-3P	
g		42×30×34 cm		250pcs		17.5kg		X. ±0.35 X.XX ±0.10 X.° ±3° X.X° ±2° X.XX° ±1°				比例 (SCALE)		1:1		审核 (CHKD)				图号 (DWG NO)			
								X.X ±0.20 X.XXX ±0.05				页次 (SHEET)		1/1		核准 (APPD)				品名 (TITLE)		EW-P20T-3P WATERPROOF CONNECTOR	