

# PRODUCT SPECIFICATION

## Philips Premium Alkaline AAA LR03

REV. No.	REASON	CONTENTS	DATE	REMARK
0	Initial Release		2020-01-03	

## 1. Trademark:

This specification is applicable to Philips alkaline cell, LR03 Premium Alkaline (Mercury & Cadmium & Lead Free).

## 2. Law & Regulation Compliances:

This product complies with EU's battery directive (2013/56/EU).

Packaging materials comply with EU's directive on packaging materials and waste (94/62/EC)

## 3. General:

### 3.1 Type designation

IEC/ JIS	LR03
ANSI	24A
Common	AAA

3.2 Chemical system: Zn/KOH-H<sub>2</sub>O/MnO<sub>2</sub>


3.3 Nominal voltage: 1.5 V

3.4 Weight: Approximate 12.0g

### 3.5 Dimension (mm)

The dimensions shall be in accordance with the below figures both prior to and after service output test.  
Measuring equipment shall be with an accuracy  $\pm 0.05\text{mm}$  at least.

/	min	max
$\Phi$	9.9	10.5
A	43.8	44.5
C	4.3	-
F	-	3.8
G	0.8	-

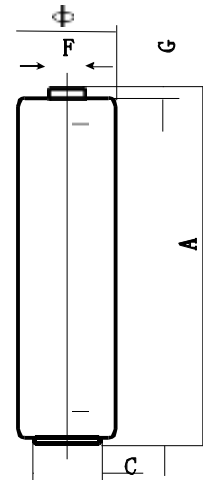

3.6 Capacity: Approximate 1320mAh (10mA, 24h/d, 20°C, e.v.= 0.8V)

3.7 Operation temperature : -18°C~50°C  
Recommend storage temperature : Not exceed 30°C

3.8 Heavy Metal Contents: Hg  $\leq 1$  ppm, Cd  $\leq 20$ ppm, Pb  $\leq 40$ ppm



## Product Specification

### 4. Appearance

The battery visually inspected by unaided eye 30cm away from battery. The battery shall be free from dents, scratch, rust and extruded internal compounds, such as sealing compounds and etc, and serious displacement of artwork. Appearance defects shall not be observed that may adversely affect actual use or performance of batteries.

### 5. Electrical Characteristics

Unless otherwise stated, all measurements are to be performed at a **Standard Environment** of

**20 ± 2°C**  
**55 ± 20% RH.**

All samples are normalized for 8 hours at least at the above environment prior to measurement. The digital voltmeter (DCM) is with the precision of 1mV (internal resistance not less than 1 Megohm). The load resistance of the total circuit is accurate within ±0.5% of the specified value.

5.1 Open circuit voltage and closed circuit voltage (Load resistance 3.9Ω, 0.3S)

/		OCV(V)	CCV(V)	S.C.(A) (reference)
Initial	Min	1.57	1.41	7.0
	Normal	1.62	1.49	13.0
Stored 1 year	Min	1.55	1.37	5.0
	Normal	1.58	1.45	9.0

5.2 Service output

Load	20Ω	600mA	600mA	5.1Ω	5.1Ω	100mA	24Ω	75Ω	50 mA,	
Test mode	24h/d	24h/d	10s/m, 1h/d	1h/d	4m/h,8h/d	1h/d	15s/m 8h/d	4h/d	1h/12h 24h/d	
End voltage	0.9V	0.9V	0.9V	0.8V	0.9V	0.9V	1.0v	0.9V	0.9 V	
Unit	h	m	pulse	m	m	h	h	h	h	
Applications	Reference	Reference	Photo flash	Toy	Portable lighting	Digital audio	Remote control	Radio/Clock	Digital Audio	
Initial	MAD	18.4	40	410	260	230	9.8	20.5	73.5	22
	Normal	19.8	47	470	285	260	10.9	22.0	77.5	23.5
Stored 1 year	MAD	17.5	34	380	235	215	9.0	20.0	71.5	20
	Normal	18.8	42	455	265	248	10.3	21.7	74.5	21.5

m: minute h: hour d: day

Remark: 1) The initial discharge test shall commence within 30 days of manufacture. During stored period, the cells shall be stored under 20±2°C, RH 55±20% conditions.

2) Lot release service output test is conducted by 20Ω continuous discharging to 0.9volts

- The batteries shall not leak during the service life test before the end voltage reached.

- 3) MAD: minimum average duration--our guarantee discharge value.
- 4) Normal: normal data, it's our normal daily value, batteries discharge value are on this as base to be upper or lower.

### **6. Leakage Resistance**

#### 6.1 Over discharge leakage test

Test conditions:  $20\pm 2^{\circ}\text{C}$  & RH  $55\pm 20\%$ ,  $20\Omega$  continuous discharge 48h.

Number of test samples: 9 batteries

Requirement: No visible leakage; No explosion.

#### 6.2 High temperature leakage test

Test conditions: store 20 days under  $60\pm 2^{\circ}\text{C}$ , then store 4~24h under standard environment.

Number of test samples: 24 batteries

Requirement: No visible leakage; No explosion.

### **7. Security Characteristics**

#### 7.1 User Drop Test

This test simulates the situation when a battery is accidentally dropped.

Test conditions: Undischarged test batteries shall be dropped from a height of 1 m onto a concrete surface. Each test battery shall be dropped six times, twice in each of the three axes. The test batteries shall be stored for 1 h afterwards.

Number of test sets: 5 batteries

Requirement: No fire, No explosion.

#### 7.2 Short-circuit explosion-proof characteristics

This test simulates an external short circuit of a battery during daily handling of batteries.

Test conditions: Positive and negative terminals of an undischarged battery shall be connected directly. The circuit shall be completed for 24 h or until the battery case temperature has returned to ambient. The resistance of the inter-connecting circuitry shall not exceed  $0,1\ \Omega$ .

Number of test samples: 5 batteries

Requirement: No fire or explosion; Leakage is allowable.

#### 7.3 Incorrect installation

This test simulates incorrect installation of a battery in a series application.

Test conditions: 4 undischarged batteries are used per test. 3 batteries are placed correctly in series; the 4<sup>th</sup> battery is reversed with respect to polarity. The circuit is maintained until venting occurs or the reversed battery temperature has returned to ambient.

Number of test sets: 5 (20 batteries)

Requirement: No fire or explosion; Leakage is allowable.

### **8. Shelf-life:**

10 years



## ***Product Specification***

---

### **9. Expiry Date Marking:**

9.1 Unless otherwise specified, each battery will carry a manufacturing date code followed by month and year of manufacturing for domestic and manufacturing date code followed by month and year of expiry for export. (Shelf life 10 years)

### **10. Packaging Requirements**


10.1 The total of heavy metal lead, cadmium, mercury, and hexavalent chromium concentration shall not exceed 100 ppm in Packaging materials and printing inks. Ozone depleting substances (ODS) shall not be used in the manufacturing of any packaging.

The printing on each cell label is legible and permanent. Label defects, if any, shall conform to mutually agree upon limit samples.

10.2 It is recommended that packaging for shipment and sales according with Packaging Specification of Philips alkaline cell. For example, 2pcs cells in a shrink, 12 shrinks in a display box, and 30 display boxes in a final outer carton. Flow chart as following:

10.3 Otherwise packaging for shipment and sales shall conform to the mutually agreed to Packaging Specification of the designated customers.

***Product Specification***

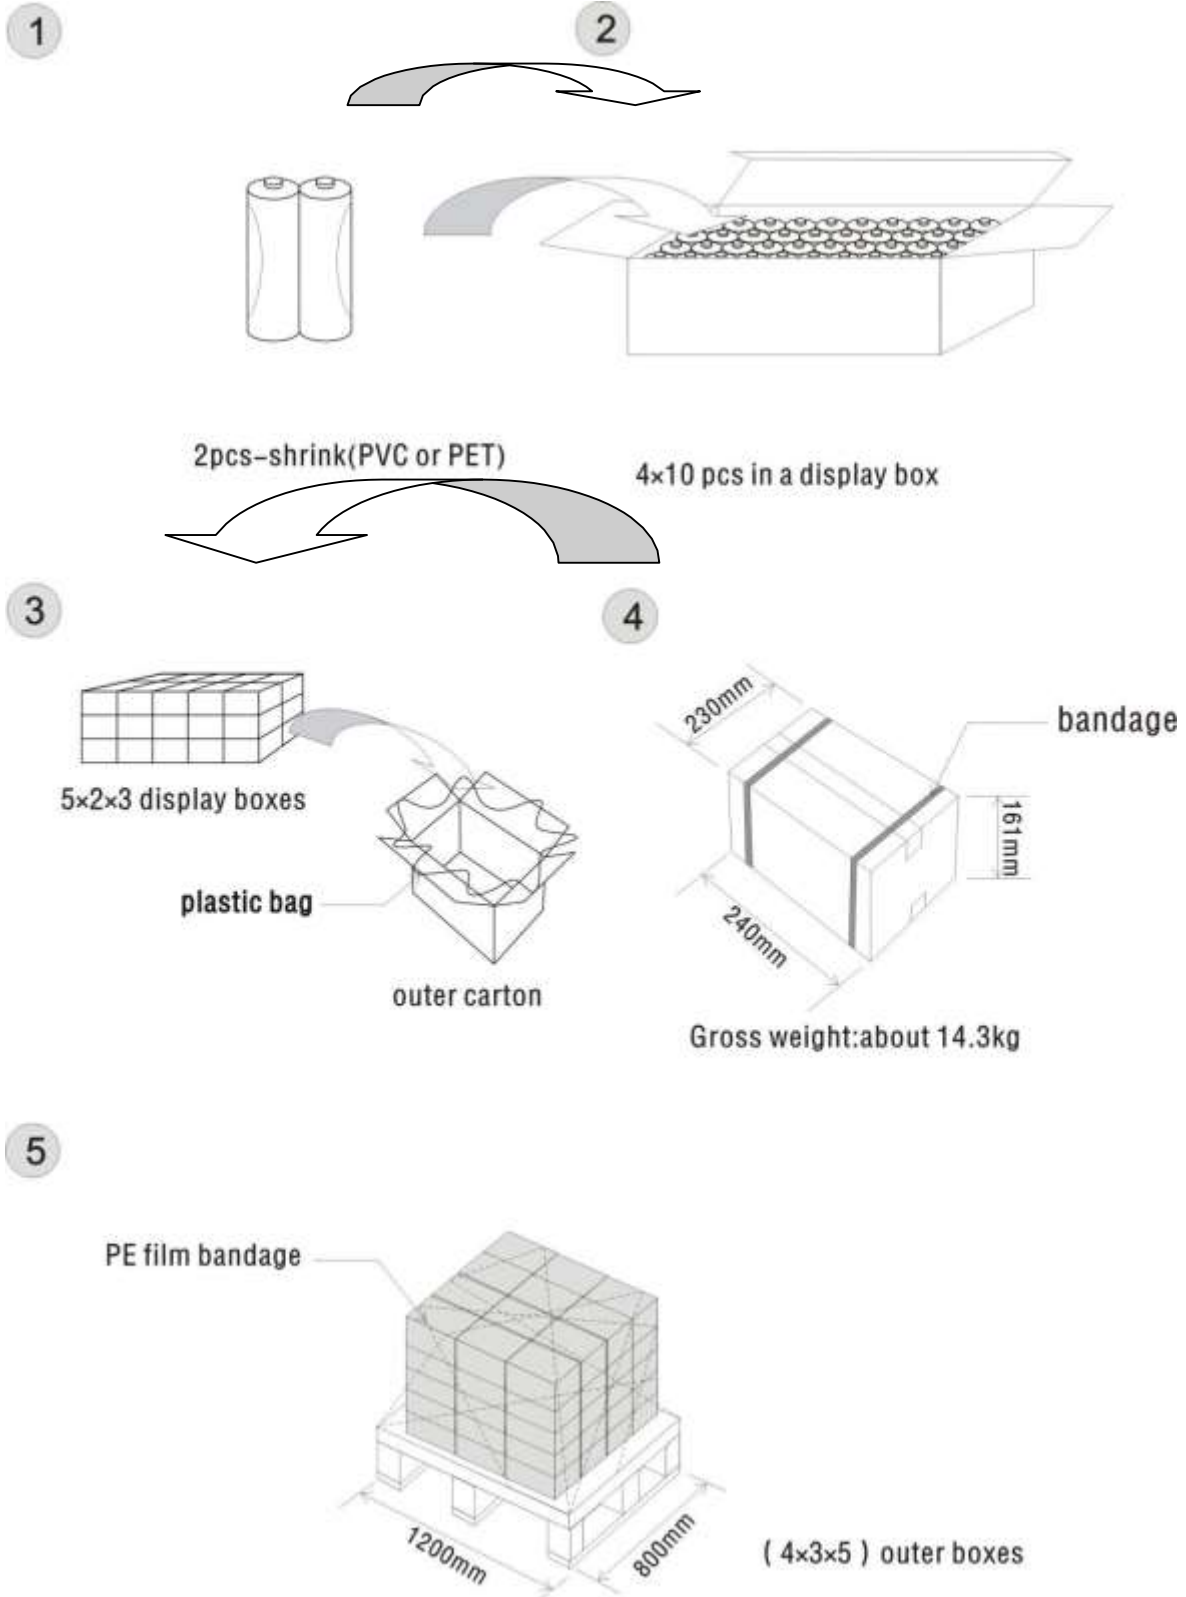

## 11. Material Safety Data Sheet

### 11.1 Composition /Information on Ingredients:

Chemical Nature: Alkaline zinc-manganese dioxide batteries

MATERIALS	APPROXIMATE PERCENT OF TOTAL WEIGHT (%)	MATERIALS	APPROXIMATE PERCENT OF TOTAL WEIGHT (%)
Manganese Dioxide (MnO <sub>2</sub> )	40.0	Brass	4.5
Zinc Powder (Zn)	20.0	Fe	20.5
Water (H <sub>2</sub> O)	7.0	Ni-plating	0.3
Potassium Hydroxide (KOH)	5.5	Bi	0.0045
Carbon	2.2	In	0.0045

Chart 1. Discharge diagram

