


KSM

Трапецеидальная цилиндрическая
стальная гайка

*D - правая резьба

*G - левая резьба

Материал - 9SMnPb28 / AC14 ГОСТ 1414-75

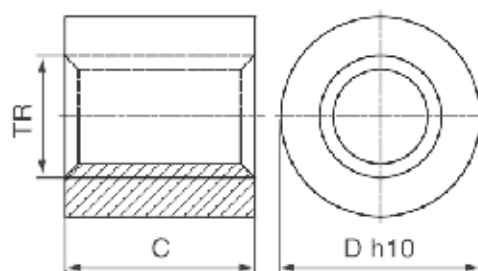

Артикул	Размеры, мм			Поверхность контакта, мм ²	Шаг резьбы, мм	Вес, кг
	TR	D h10	C			
KSM102D	10	22	15	169	2	0,037
KSM103D	10	22	15	165	3	0,035
KSM123D	12	26	18	244	3	0,061
KSM143D	14	30	21	338	3	0,94
KSM144D	14	30	21	330	4	0,09
KSM164D	16	36	24	440	4	0,158
KSM184D	18	40	27	566	4	0,215
KSM204D	20	45	30	707	5	0,308
KSM225D	22	45	33	855	5	0,322
KSM245D	24	50	36	1028	5	0,443
KSM265D	26	50	39	1216	5	0,45
KSM285D	28	60	42	1421	5	0,75
KSM306D	30	60	45	1634	6	0,778
KSM326D	32	60	48	1871	6	0,793
KSM366D	36	75	74	2395	6	1,48
KSM407D	40	80	60	2988	7	1,83
KSM447D	44	80	66	3647	7	1,89
KSM508D	50	90	75	4696	8	2,695
KSM609D	60	100	90	6840	9	3,865
KSM7010D	70	110	100	8955	10	5,115
KSM8010D	80	110	110	11364	10	6