





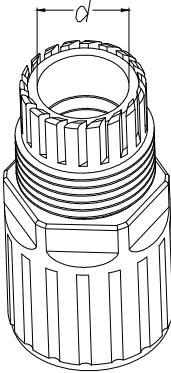
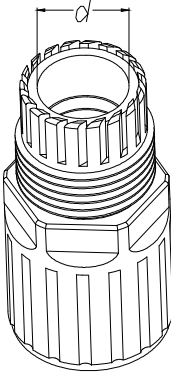
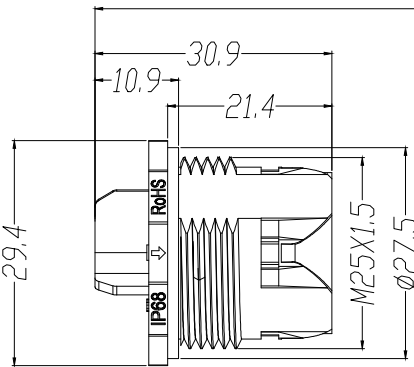


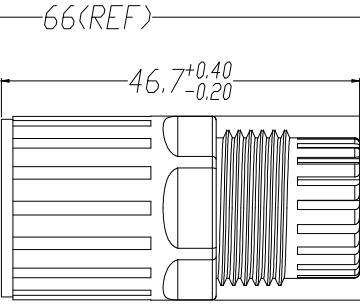





1		2		3		4		5		6		7		8										
A	原材料 Raw material		PA66、BRASS、SILICONE		4 Pin  母端插孔 Pole Female connector 公端插针 Pin Male connector 安装孔尺寸 Mounting hole size 		版本(REV)		说明 (DESCRIPTION)		设计 (DESIGN)		DATE											
	符合认证标准 CERTIFICATION		UL/TUV/RoHS				X1		NEW DRAWING		PDH		2021/03/22											
	阻燃等级 Flame-resistant rating		UL94-V0																					
B	防护等级 Level of protection		IP68		  																			
	额定电压/额定电流 Voltage rating/Current rating		450V / 15A																					
	耐电压 Withstanding voltage		1000V																					
C	线材规格 Cable gague		0.5mm ² ~2.5mm ²																					
	工作温度 Operating temperature		-40℃ ~+105℃																					
D	胶塞孔径d Rubbers Diameter		适用线外径 Outer Cable Diameter																					
	Ø11.5		Ø9-12																					
	Ø8.5		Ø5-9																					
E			 		 		 																	
F	产品单重 Weight		外箱尺寸 MEAS		单箱数量 Each carton number		单箱毛重 G. W.		未注公差 (TOLERANCE UNSPECIFIED)		单位 (UNIT)		mm		绘图 (DRAW)		彭冬华 / 2021/03/22		料号 (PART NO)		EW-M23-4P-MP		FUCON	
	g		42×30×26 cm		500 pcs		18.2kg		X. ±0.35 X. XX ±0.10 X. ° ±3° X. X° ±2° X. XX° ±1°				比例 (SCALE)		1:1		审核 (CHKD)		图号 (DWG NO)		EW-M23-4P-MP			
											页次 (SHEET)		1/1		核准 (APPD)		品名 (TITLE)		自锁式 公母对插款M23面板式 4芯 Auto-connection male and female plug M23 panel of 4 Pin					
1		2		3		4		5		6		7		8										