

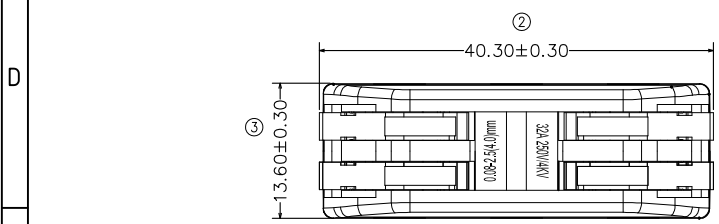
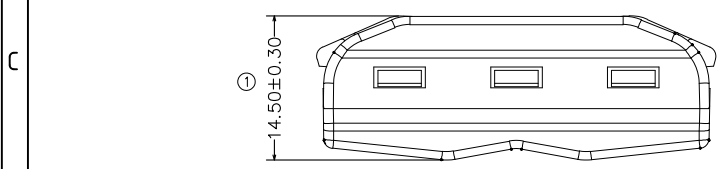


1		2		3		4		5		6		7		8	
未注公差/General tolerances(mm)															
>0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/10	
~	~	~	~	~	~	~	~	~	~	~	~	~	~		
3	6	10	18	30	50	80	120	180	250	315	400	500			
±0.15	±0.20	±0.25	±0.30	±0.35	±0.40	±0.60	±0.80	±0.95	±1.00	±1.20	±1.60	±2.20	±2.50	±2t	

5	6	7	8
符号/SIGN	描述/DESCRIPTION	修订者/DRAWN	日期/DATE

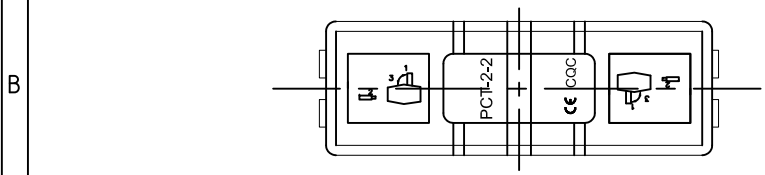

Housing material: PA6
Material of Pins: copper alloy

Factory: Xiamen Fucon IMP.&EXP. CO.,LTD

Part No.: PCT-2-2C
PCT-2 - series of push wire connector (terminal)
2 - number of Pins (2 pins)
C - colored push keys (color red and blue)

技术参数 Technical parameter:

● 产品标准/Rated Voltage	IEC60947
● 获得安规及标志 Access to Safety Mark	
● 证书号码/Certificate No	R50543119
● 额定电压/Rated Voltage	250V
● 额定电流/Rated Current	32A
● 硬质导线/Solid wire	0.2~4.0mm ²
● 软质导线/Stranded wire	0.2~2.5mm ²
● 剥线长度/Wire strip length	9~10mm
● 绝缘耐压/Withstanding Voltage	2500V
● 温度范围/Operating temperature	-40℃~105℃
● 位数/PIN	1~8
● 关键尺寸/Critical dimension	★

⑤	弹片	不锈钢	SUS301	4
④	铜件	紫铜	T2	2
③	手柄	阻燃尼龙	PA6-V0	4
②	上盖	阻燃尼龙	PA6-V0	1
①	主座	阻燃尼龙	PA6-V0	1
ITEM 序号	NAME OF PART 部件名称	Material 材料	NOTES 备注	QTY 用量

 FUCON	CAT NO./认证型号	PCT-2-xx	SHEET: 1/1
	PATE NO./成品料号	XX.XX.XXX.XXXX	SCALE: 1:1
	CUST NO./客户料号	/	REV.: A01
	APPROVED/审批	何晓雄 2022.04.12	MODEL:
CHECKED/核准	胡耀权 2022.04.12	PCT-2-2C	
DRAWN/制图	陈燕龙 2022.04.12	DRAWING NO./图号: PCT-2-001	
SIZE: A4	mm (inch)	TYPE/图纸类型: CUSTOMER_DRAWING	