

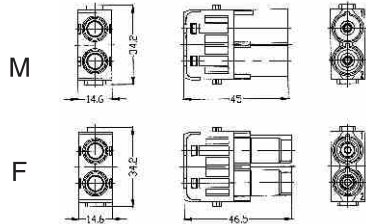


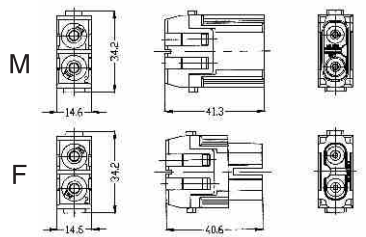


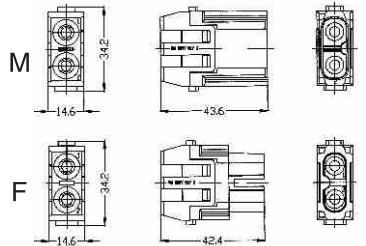


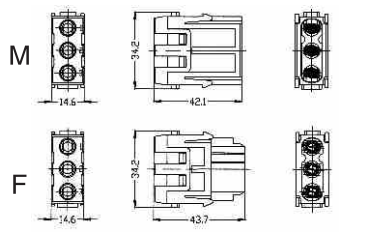


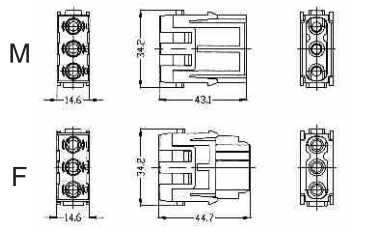


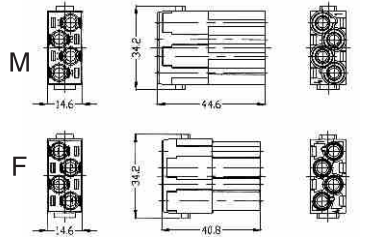


HM | 模块型技术特性

Modular Series Technical Characteristics

产品型号 Type of products	尺寸图 Drawing(Dimensions in mm)	技术参数 Technical parameters
  SO-HMK70-002-MC SO-HMK70-002-FC		接插件针数/Number of contacts:2 工作电流/Working current:70A 工作电压/Working voltage:1000V 额定脉冲耐受电压/Rated impulse voltage:8KV 污染等级/Pollution degree:3 塑件/Insert: Polycarbonate 接插件/Contacts:铜,镀银/copper alloy,Silver plated 接触电阻/Contact resistance: $\leq 0.5m\Omega$ 冷压连接/Crimp terminal: 10-25mm ² (AWG6...2)
  SO-HMK-002-M SO-HMK-002-F		接插件针数/Number of contacts:2 工作电流/Working current:40A 工作电压/Working voltage:1000V 额定脉冲耐受电压/Rated impulse voltage:8KV 污染等级/Pollution degree:3 塑件/Insert: Polycarbonate 接插件/Contacts:铜,镀银/copper alloy,Silver plated 接触电阻/Contact resistance: $\leq 0.3m\Omega$ 轴向螺连接/Screw terminal: 2.5-10mm ² (AWG14...8) 内六角板手/Hexagonal driver:SW 2
  SO-HMK-002-MC SO-HMK-002-FC		接插件针数/Number of contacts:2 工作电流/Working current:40A 工作电压/Working voltage:1000V 额定脉冲耐受电压/Rated impulse voltage:8KV 污染等级/Pollution degree:3 塑件/Insert: Polycarbonate 接插件/Contacts:铜,镀银/copper alloy,Silver plated 接触电阻/Contact resistance: $\leq 1m\Omega$ 冷压连接/Crimp terminal:1.5-10mm ² (AWG16-8)
  SO-HMK-003-M SO-HMK-003-F		接插件针数/Number of contacts:3 工作电流/Working current:40A 工作电压/Working voltage:690V 额定脉冲耐受电压/Rated impulse voltage:8KV 污染等级/Pollution degree:3 塑件/Insert: Polycarbonate 接插件/Contacts:铜,镀银/copper alloy,Silver plated 接触电阻/Contact resistance: $\leq 0.3m\Omega$ 轴向螺连接/Screw terminal: 2.5-10mm ² (AWG14...8) 内六角板手/Hexagonal driver:SW 2
  SO-HMK-003-MC SO-HMK-003-FC		接插件针数/Number of contacts:3 工作电流/Working current:40A 工作电压/Working voltage:500V 额定脉冲耐受电压/Rated impulse voltage:6KV 污染等级/Pollution degree:3 塑件/Insert: Polycarbonate 接插件/Contacts:铜,镀银/copper alloy,Silver plated 接触电阻/Contact resistance: $\leq 1m\Omega$ 冷压连接/Crimp terminal:1.5-10mm ² (AWG16-8)
  SO-HMK-004-MC SO-HMK-004-FC		接插件针数/Number of contacts:4 工作电流/Working current:40A 工作电压/Working voltage:830V 额定脉冲耐受电压/Rated impulse voltage:8KV 污染等级/Pollution degree:3 塑件/Insert: Polycarbonate 接插件/Contacts:铜,镀银/copper alloy,Silver plated 接触电阻/Contact resistance: $\leq 1m\Omega$ 冷压连接/Crimp terminal:1.5-10mm ² (AWG16-8)