


未经允许禁止传输、复制、编辑该文档，以及利用其内容进行交流

Connection method:

1. For Solid wire, peel wire in right length, push down the wire.
2. For flexible wire, peeling wire in right length, pushdown the key & fix the wire, or wire furrled and fix then.

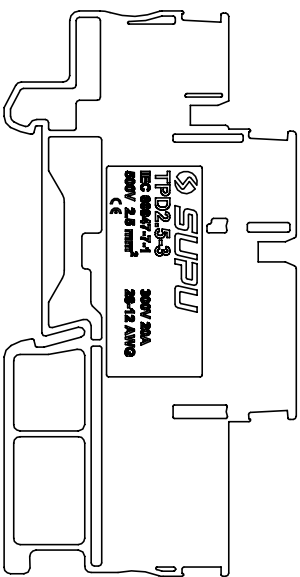

UL/CUL Standard

- | | | | |
|------------------|-----|-----|---|
| Use group | B | C | D |
| Rated voltage(V) | 600 | 600 | |
| Rated current(A) | 20 | 20 | |

1. Conductor cross section :

Insulator	PA66	UL94 V-0
Conductor	Copper alloy	Sn plated
Spring	Stainless steel	

General information:

- ## 5. Undimensioned Tolerances:

[illegible]

Surge voltage category	III
------------------------	-----

Over 6 TO 6	Over 10 TO 24	Over 30 TO 60	Over 60 TO 100	Over 100 TO 150	Over 150	0,1/10
±0,15	±0,20	±0,30	±0,50	±0,70	±1,00	±1,30
						±2°

未注公差 Tolerance	表面 Surface
见公差表	VD121
版本号 Revision Number	重量 Weight
MI	比例 Scale
第1页/共1页 1 of 1	1:1
	 mm