HM 模块型技术特性
Modular Series Technical Characteristics

产品型号 Type of products	尺寸图 Drawing(Dimensions in mm)	技术参数 Technical parameters
 SO-HMK-003/4-MC  SO-HMK-003/4-FC		接插件针数/Number of contacts:3/4 工作电流/Working current:电源/Power area: 40A 信号/Signal area: 10A 工作电压/Working voltage:830V 额定脉冲耐受电压/Rated impulse voltage:8KV 污染等级/Pollution degree:3 塑件/Insert: Polycarbonate 接插针/Contacts:铜,镀金,镀银/copper alloy,Gold plated,Silver plated 接触电阻/Contact resistance:≤1mΩ Power contacts ≤3mΩ Signal contacts 冷压连接/Crimp terminal: 电源/Power area: 1.5-10mm²(AWG16-8) 信号/Signal area: 0.14-2.5mm²(AWG26-14)
 SO-HME-006-MC  SO-HME-006-FC		接插件针数/Number of contacts:6 工作电流/Working current:16A 工作电压/Working voltage:500V 额定脉冲耐受电压/Rated impulse voltage:6KV 污染等级/Pollution degree:3 塑件/Insert: Polycarbonate 接插针/Contacts:铜,镀金,镀银/copper alloy, Gold plated,Silver plated 接触电阻/Contact resistance:≤1mΩ 冷压连接/Crimp terminal:0.14-4mm²(AWG26-12)
 SO-HMEE-008-MC  SO-HMEE-008-FC	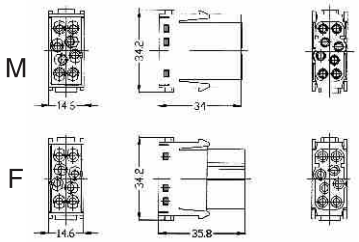	接插件针数/Number of contacts:8 工作电流/Working current:16A 工作电压/Working voltage:400V 额定脉冲耐受电压/Rated impulse voltage:6KV 污染等级/Pollution degree:3 塑件/Insert: Polycarbonate 接插针/Contacts:铜,镀金,镀银/copper alloy,Gold plated,Silver plated 接触电阻/Contact resistance:≤1mΩ 冷压连接/Crimp terminal:0.14-4mm²(AWG26-12)
 SO-HVME-006-MC  SO-HVME-006-FC		接插件针数/Number of contacts:6 工作电流/Working current:16A 工作电压/Working voltage:830V 额定脉冲耐受电压/Rated impulse voltage:8KV 污染等级/Pollution degree:3 塑件/Insert: Polycarbonate 接插针/Contacts:铜,镀金,镀银/copper alloy,Gold plated,Silver plated 接触电阻/Contact resistance:≤1mΩ 冷压连接/Crimp terminal:0.14-4mm²(AWG26-12)
 SO-HME-005-MS  SO-HME-005-FS		接插件针数/Number of contacts:5 工作电流/Working current:16A 工作电压/Working voltage:400V 额定脉冲耐受电压/Rated impulse voltage:6KV 污染等级/Pollution degree:3 塑件/Insert: Polycarbonate 接插针/Contacts:铜,镀银/copper alloy,Silver plated 接触电阻/Contact resistance:≤3mΩ 弹片连接/Cage clamp terminal:0.14-2.5mm²(AWG26-14)
 SO-HMD-012-MC  SO-HMD-012-FC		接插件针数/Number of contacts:12 工作电流/Working current:10A 工作电压/Working voltage:250V 额定脉冲耐受电压/Rated impulse voltage:4KV 污染等级/Pollution degree:3 塑件/Insert: Polycarbonate 接插针/Contacts:铜,镀金,镀银/copper alloy,Gold plated,Silver plated 接触电阻/Contact resistance:≤3mΩ 冷压连接/Crimp terminal:0.14-2.5mm²(AWG26-14)