


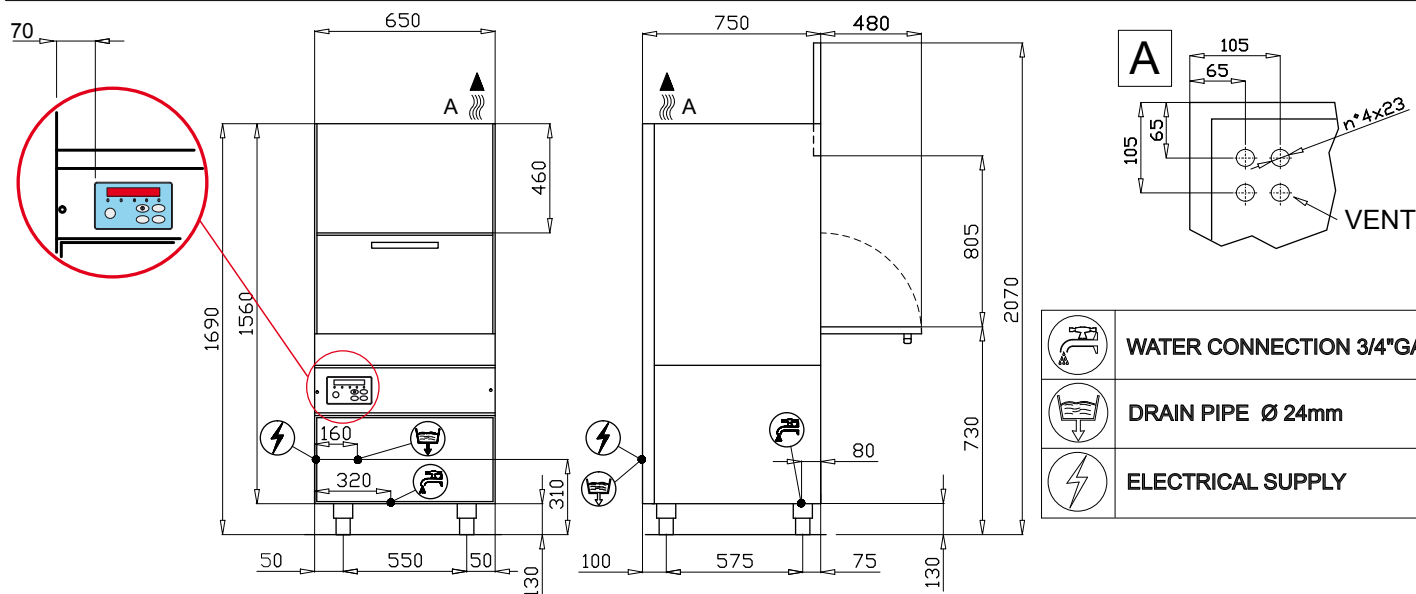

TECHNICAL DATA						
EXTERNAL DIMENSIONS						
width		650 mm				
depth		750 mm				
height		1690/2070 (open door) mm				
WEIGHT(basic version)		110 kg				
VOLTAGE		400V 3N 50Hz				
POWER REQUIRED		8000 W				
WATER HARDNESS		2-8 °F				
INLET WATER PRESSURE		200-400 kPa				
CROCKERY DIMENSIONS						
plates diameter		---				
basket max. height		805 mm				
RACK DIMENSIONS		550X665 mm				
RACK EQUIPMENT		1XC86/A - 1XC87/B - 1XC97/A - 1XC100				
WASHING CYCLES	(min)	1 (2)	2 (4)	3 (6)	4 (8)	5 (10)
WATER SUPPLY 55°C						
racks/h(*) ⁽¹⁾		30	15	10	7.5	6
WATER SUPPLY 10°C						
racks/h(*) ⁽¹⁾		17	15	10	7.5	6
WATER CONSUMPTION / CYCLE (water pressure 200kPa)		4,7 L				
BOILER CAPACITY		10 L				
BOILER HEATING ELEMENT		6000 W				
RINSING TEMPERATURE (SET)		85°C				
TANK CAPACITY		35 L				
TANK HEATING ELEMENT		2700 W				
TANK TEMPERATURE (SET)		55°C				
RINSING PUMP		150 W (14 L /min)				
PUMP POWER		2000 W (810 L/min***)				
DRAIN PUMP (optional)		190 W (120 L/min***)				
ACOUSTIC PRESSURE		63.8 dB(A)				
(*) STANDARD TERMOSTOP		(***) MAXIMUM FLOW RATE				

(*) STANDARD TERMOSTOP

(***) MAXIMUM FLOW RATE

⁽¹⁾ In case of cold water supply and/or continuous washing, the rinse-water heating process might take more time than usual, until the proper rinse temperature is reached. For this reason, the wash-cycle total timing might result longer than set.