



GERMANY TECHNOLOGY

5 OPzV 350 (2V-383AH @ C10)

Specifications

- ◆ 20 years design life @ 25°C(77°F);
- ◆ Extraordinary energy-saving features in addition with robust reliability
- ◆ Maintenance-free (no topping up) during the whole service life
- ◆ Nominal capacity 100~3000 Ah C10
- ◆ Container material: ABS, UL 94-HB; Optional: UL 94V-0
- ◆ Robust tubular plate technology
- ◆ Very low gassing due to internal gas recombination
- ◆ Up to 24 months shelf life due to low self-discharge rate (less than 2%/month at 25°C)
- ◆ The active material is manufactured from best purity lead (99.994%) to minimize the negative effects of impurities
- ◆ Proof against deep discharge according to DIN 43539 T5
- ◆ Cells in compliance with DIN 40742 Completely recyclable

Applications

- ◆ Telecommunications
- ◆ Microwave radio systems
- ◆ Power generation plants
- ◆ Emergency lighting
- ◆ Photovoltaic / Solar

HIGH PERFORMANCE

Innovative Features

- ◆ **Tubular positive plates:** Robust tubular plates consisting of a lead calcium antimony-free alloy, optimized for high corrosion resistances
- ◆ **Pasted negative plates:** Grid plate construction consisting of lead calcium alloy
- ◆ **Separators:** Micro porous and robust, for electrical separation of the positive and negative plates and optimized for low internal resistance
- ◆ **Housing:** ABS, on request flame retardant ABS according to UL 94 V-0
- ◆ **One way relief valve:** operates at low pressure and fitted with flame arrestor, release gas in case of excess pressure and protects the cell against atmosphere
- ◆ **Poles:** Screw connection for easy and safe assembly and maintenance-free connection with excellent conductivity
- ◆ **Post seals:** extremely high integrity post seal design to prevent electrolyte leakage and terminal corrosion
- ◆ **Connectors:** flexible fully insulated cable connectors screwed to the terminal with an insulated screw having a probe hole on the top for electrical measurement
- ◆ **Electrolyte:** Gel structure
- ◆ Proprietary Fixed Orifice Plate Pasting technology applying active materials on both sides of the grid for consistent cell-to-cell performance, higher capacity and uniform grid protection.



EverExceed | Empower, Energize, Exceed
the Energy you Expect forever

www.exerexceed.com



Headquarter:

Shenzhen EverExceed Industrial Co., Ltd

Floor 19, Kechuang Building Hengchangrong High TechPark,
Dezheng Road, Shiyan Bao'an District, Shenzhen.

www.everexceed.com

marketing@everexceed.com

Branch Company:




EverExceed International Company Limited (HK)

19H Maxgrand Plaza No3 Tai Yau St San PO Kong KLN Hongkong
info@everexceed.com

EverExceed Corporation Ltd. (UK)

Unit G25 WaterFront Studios, 1 Dock Road, London, United Kingdom

Europe@everexceed.com

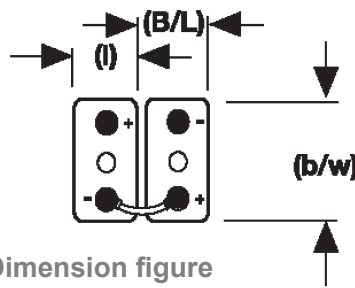

Dimension figure

Container: ABS, UL 94-HB Optional ABS, UL 94V-0

Tubular OPzV Range Electrical Specifications & Dimensions

Part number	DIN Type	Nom. Voltage (V)	C10 AH to 1.80VPC	C100 AH to 1.80VPC	Outline Dimensions (mm)					Weight (kg)	Pole Pairs	Internal Resist (mΩ)	Short Circuit Current (A)	Terminal
					Length (l)	Width (b/w)	Height (h1)	Height (h2)	Installed Length (B/L)					
2TV050350	5 OPzV 350	2	383	452	124	206	471	506	134	26.0	1	0.41	3450	F-M8

Acid density $\rho = 1.260 \text{ kg/l}$

Tubular OPzV Range Discharge Data Amperes at 25°C

End Point Volts/Cell	Discharge Time in Minutes		Discharge Time in hours								
	15 min	30 min	1 hour	2 hour	3 hour	4 hour	5 hour	6 hour	8 hour	10 hour	20 hour
1.90	232	205	152	103	79.8	66.2	55.7	52.5	41.0	34.7	16.8
1.87	263	227	166	111	84.5	69.3	59.9	52.5	42.5	35.7	18.1
1.85	305	256	184	119	89.3	73.5	63.0	55.1	44.6	36.2	18.9
1.80	336	278	194	123	91.9	75.6	64.6	56.2	45.2	38.3	19.5
1.75	386	305	206	128	95.0	77.7	66.2	57.8	46.2	38.9	20.6
1.70	428	328	212	131	96.6	78.2	66.7	57.8	46.7	39.9	21.5



Tubular OPzV Range Discharge Data Watts at 25°C

End Point Volts/Cell	Discharge Time in Minutes		Discharge Time in hours								
	15 min	30 min	1 hour	2 hour	3 hour	4 hour	5 hour	6 hour	8 hour	10 hour	20 hour
1.90	312	294	266	191	149	125	107	94.5	77.7	67.2	33.0
1.87	389	368	298	212	166	138	118	104	84.0	72.5	35.7
1.85	532	459	357	244	190	154	130	114	91.4	76.7	37.2
1.80	549	473	369	251	196	160	134	118	94.5	78.8	37.8
1.75	625	524	411	270	206	166	139	120	94.5	78.8	38.8
1.70	689	567	429	278	206	166	139	120	94.5	78.8	39.7

Long Duration Discharge Capacity (Ah) at 25°C

Part No.	DIN Type	End Point Volts/Cell	C ₂₄	C ₄₈	C ₁₀₀	C ₁₂₀	C ₂₄₀
2TV050350	5 OPzV 350	1.85	393	437	448	457	465
		1.80	397	441	452	462	470

Actual battery performance data may be +/-5% of figures shown above.



EverExceed | Empower, Energize, Exceed
the Energy you Expect forever

www.exerexceed.com



Headquarter:

Shenzhen EverExceed Industrial Co., Ltd

Floor 19, Kechuang Building Hengchangrong High TechPark,
Dezheng Road, Shiyao Bao'an District, Shenzhen.

www.exerexceed.com

marketing@everexceed.com

Branch Company:

EverExceed International Company Limited (HK)

19H Maxgrand Plaza No3 Tai Yau St San PO Kong KLN Hongkong
info@everexceed.com

EverExceed Corporation Ltd. (UK)

Unit G25 WaterFront Studios, 1 Dock Road, London, United Kingdom

Europe@everexceed.com