



EVEREXCEED AGM TECHNOLOGY

FT12V150

**VALVE REGULATED
LEAD ACID BATTERY (AVR)
FOR COMMUNICATION
STANDBY POWER APPLICATIONS**

12V 150AH @ 10 HR RATE to 1.80VPC

12V 149AH @ 8 HR RATE to 1.75VPC

12V 464 WATTS/CELL @ 15MIN RATE to 1.67VPC

**LONG
DURATION**



**HIGH
PERFORMANCE**

Innovative Features

- ◆ 12 years design life @ 25°C(77°F);
- ◆ Virgin Pure Lead Tin and thick positive plate technology design for maximum service float life ;
- ◆ UL Recognized component;
- ◆ Valve regulated lead acid battery (VRLA);
- ◆ Optimized high-compression Absorbed Glass Mat (AGM) materials significantly enhance performance and reliability, greater than 99% recombination efficiency;
- ◆ Proprietary Fixed Orifice Plate Pasting technology applying active materials on both sides of the grid for consistent cell -to-cell performance, higher capacity and uniform grid protection.
- ◆ Advanced triple stage unique terminal sealing design to ensure leak free operation;
- ◆ Up to 12 months shelf life due to low self-discharge rate (less than 3%/month at 25°C)
- ◆ Heavy duty M6 / M8 Female copper plated terminals provide maximum performance and easy installation, reduce maintenance and increase safety;
- ◆ Advanced lead high-tin low-calcium alloy, reduces grid corrosion and promotes long battery life;
- ◆ Standard: Reinforced ABS (UL 94HB) container and cover; Optional: Flame-retardant reinforced ABS case and cover compliant with UL94 V-0 with an Oxygen Limiting Index of greater than 28%;
- ◆ Designed to withstand extreme temperature degrees and performance without degradation;
- ◆ Flame arresting, low pressure safety release venting system for individual cells, recognized per UL 924.

12 VOLTS - 150 AMPERE HOUR @ 10 HOUR RATE

AH Capacity to 1.80VPC @ 25°C (77°F)

End Point Volts/Cell	1hr	2hr	3hr	4hr	5hr	6hr	8hr	10hr	20hr
1.80	93	110	121	128	133	141	143	150	162

For UPS / Solar / Telecommunication Applications



EverExceed | Empower, Energize, Exceed
the Energy you Expect forever

www.exerexceed.com



Headquarter:

Shenzhen EverExceed Industrial Co., Ltd

① Floor 19, Kechuang Building Hengchangrong High TechPark, Dezheng Road, Shiyao Bao'an District, Shenzhen.

① www.exerexceed.com

① marketing@everexceed.com

Branch Company:

EverExceed International Company Limited (HK)


① 19H Maxgrand Plaza No3 Tai Yau St San PO Kong KLN Hongkong
① info@everexceed.com

EverExceed Corporation Ltd. (UK)

① Unit G25 WaterFront Studios, 1 Dock Road, London, United Kingdom
① Europe@everexceed.com

Electrical Specifications	
Cells Per Unit	6
Voltage Per Unit	12.84V
Weight	96.8lbs 44.0kg
Electrolyte	SG = 1.300
Maximum Discharge Current@5s	1500Amps
Short Circuit Current	3680Amps
Internal Resistance	4.0(mΩ)

Length : 550mm
 Width : 110mm
 Height : 285mm
 Total Height : 288mm

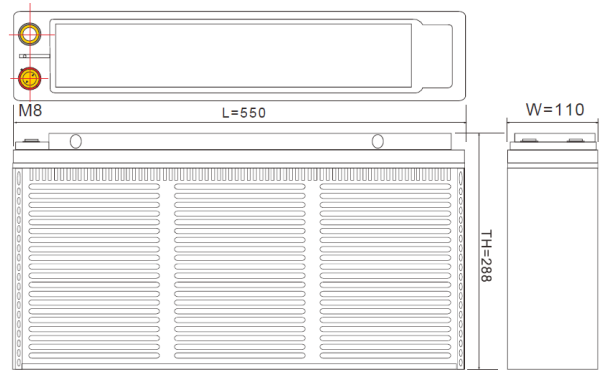

Capacity	150 Ah @ 10 hr. rate to 1.80 volts per cell @ 25°C (77°F). 149 Ah @ 8 hr. rate to 1.75 volts per cell @ 25°C (77°F). 464Watts per all at the 15 minute rate to 1.67 volts per cell @ 25°C (77°F).
Applicable Operating Temperature Range	-40°C (-40°F) to +70°C (+158°F).
Ideal Operating Temperature Range	+20°C (+68°F) to +28°C (+82.4°F).
Floating Charging Voltage	13.5 to 13.8 VDC/unit Average at 25°C (77°F).
Recommended Maximum Charging Current Limit	37.5 Amperes (0.25C ₁₀ Amperes)
Equalization and Cycle Service Charging Voltage	14.1 to 14.4 VDC/unit Average at 25°C (77°F).
Maximum AC Ripple (Charger)	0.5% RMS or 1.5% P-P of float charge voltage recommended for best results. Maximum voltage allowed = 0.5% RMS (4% P-P). Maximum current allowed = 0.28 amperes RMS (C/10) to 1.80VPC.
Self Discharge	EverExceed FT AGM Range batteries may be stored for up to 12 months at 25°C (77°F) and then a freshening charge is required. For higher temperatures the recharge time interval will be shorter.
Accessories	Inter unit connectors racks and cabinet systems are available.
Terminal: Inserted	Threaded copper alloy insert terminal
Terminal Hardware Initial Torque: Inserted Terminal	11 NM

Constant Power Discharging Ratings - Watts Per Cell @ 25°C (77°F)															
End Point Volts/Cell	5min	10min	15min	30min	45min	60min	End Point Volts/Cell	2hr	3hr	4hr	5hr	6hr	8hr	10hr	20hr
1.80	605	464	415	290	225	179	1.85	101	75.0	59.5	49.5	43.1	34.1	28.5	16.1
1.75	678	506	437	302	232	185	1.8	104	77.3	61.5	51.8	44.0	35.6	29.5	16.7
1.67	741	548	464	310	236	187	1.75	105	78.0	62.0	52.9	45.0	36.2	30.2	17.0

Constant Current Discharging Ratings - Ampere per Cell @ 25°C (77°F)															
End Point Volts/Cell	5min	10min	15min	30min	45min	60min	End Point Volts/Cell	2hr	3hr	4hr	5hr	6hr	8hr	10hr	20hr
1.80	349	263	224	154	116	93	1.85	52.9	38.0	30.2	24.9	22.3	17.3	14.6	7.88
1.75	398	289	244	159	121	97	1.8	54.8	40.3	31.9	26.6	23.5	17.9	15.0	8.10
1.67	459	321	264	161	122	98	1.75	55.9	41.3	32.8	27.0	24.4	18.6	15.2	8.25

Note: Batteries to be mounted with 0.39 in (1.00 cm) spacing minimum and free air ventilation.
 Specifications subject to change without notification.



EverExceed | Empower, Energize, Exceed
 the Energy you Expect forever

www.exerexceed.com



Headquarter:

Shenzhen EverExceed Industrial Co., Ltd

19H Kechuang Building Hengchangrong High TechPark,
 Dezheng Road, Shiyuan Bao'an District, Shenzhen.

www.exerexceed.com

marketing@everexceed.com

Branch Company:

EverExceed International Company Limited (HK)

19H Maxgrand Plaza No3 Tai Yau St San PO Kong KLN Hongkong
info@everexceed.com

EverExceed Corporation Ltd. (UK)

Unit G25 WaterFront Studios, 1 Dock Road, London, United Kingdom
Europe@everexceed.com