

TRAILER T-608/2L

TECHNICAL SPECIFICATIONS | EQUIPMENT



✓ **HOMOLOGATION
EUROPEAN**



Year of model 2022


version.2.2022

CynkoMet[®]
Czarna Białostocka

TECHNICAL SPECIFICATIONS

Type/Variant/Version	T-2 / 121 / 11
Technically (design) permissible total weight rating	16,000 kg
Gross vehicle weight rating	16,000 kg
Load capacity	~12,260 kg*
Unladen mass	~3,740 kg*
Length with retracted rear frame / length with extended rear frame	10,815 / 11,815 mm
Width	2,540 mm
Height	~2,590 mm
Width of cargo box	2,430 mm
Length of cargo box with retracted rear frame / length with extended rear frame	8,950 / 9,950 mm
Height of ladders from floor	1,335 mm
Loading surface	21.7 / 24.2 m ²
Height of floor above ground	~1,200 mm
Tire size	500/50-17
Floor sheet thickness	4 mm
Track of wheels	1,800 mm
Wheelbase	5,750 mm
Drawbar coupling height – min.	610 mm
Drawbar coupling height – max.	910 mm
Coupling height of rear hitch (optional)	960 mm
Transport/working speed	40 km/h
Suspension	parabolic springs
Class of cooperating tractor	80 HP

* - unladen weight and loading capacity may differ depending on the trailer's equipment

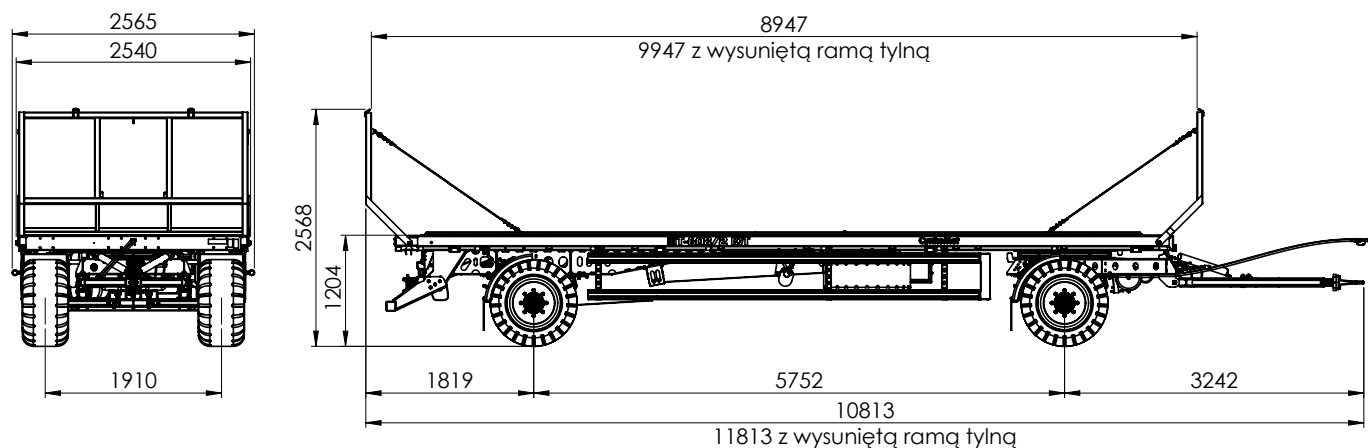

STANDARD MACHINE EQUIPMENT

New 500/50 - 17 wheels

Axles from renowned ADR company, homologated (EU 2015/68), bar cross-section - square, 90 mm, 350x90 brakes, 8 M20 pins

Pallet width

Two wheel chocks placed in galvanized pockets

Mudguards on front and rear axle

Galvanized floor of cargo box made of sheets, thickness 4 mm

12V lighting, homologated, rear bulb lamps, LED perimeter lighting, rear socket for connection to second trailer

"Y"-type drawbar with exchangeable tip, homologated according to Regulation 55UN ECE and 167/2013*2015/208ND, 40mm eye

Lighting installation connecting cable

Homologated, double-circuit, pneumatic brake system with automatic braking force adjustment from HALDEX, with output for second trailer.

Hot-dip galvanized frame (protection of the structure on the exterior and interior of profiles), stringers of the frame made of 160x160x5 and 120x60x5 closed sections

Galvanized ladders with height 1365 mm, made from closed sections

Parabolic leaf spring suspension

Parking handbrake with crank

Rear brake output to second trailer

Hot-galvanized rear bumper, homologated according to Regulations 2015/504 and 167/2013

*All of our agricultural machines are designed and tested by our design team using the latest available tools.
Manufacturing is performed with the greatest diligence and in adherence to rigorous quality standards.*

OPTIONAL MACHINE EQUIPMENT

Structural elements

Side underrun guards

Spare wheel winch with hot-galvanized wheel hanger

Hydraulically extendable rear frame, extending the loading surface by 1m (driving on public roads with extended rear frame is prohibited)

Central ladder stay lines

Hydraulically lifted (one side) side protection (Unladen mass 4 600kg)

Hydraulically lifted (both sides) side protection (Load capacity 11 400kg)

Installations

Full LED lighting

Hydraulic double-circuit brake system with automatic braking force adjustment

Driving system

500/50-17 spare wheel

Surcharge for 435/50R 19.5 wheels

435/50R 19.5 spare wheel

Other equipment

Manual hitch for second trailer

Hydraulic quick-coupler with pressure neutralizer in hose

Warning triangle (sign distinguishing slow-moving vehicle)

Extended ladders (height from floor - 1800 mm)

Drawbar eye 50 mm

Toolbox

Water tank + soap dispenser

DISCOUNTS ON THE GIVEN PRICES ARE GRANTED INDIVIDUALLY BY AUTHORIZED DEALERS OF THE CYNKOMET BRAND



The data and photographs given in the catalog are for illustrative purposes only. This document and the information it contains, including prices, do not constitute a commercial offer within the meaning of art. 66 of the Civil Code. This information may be subject to change as products are continuously improved. The manufacturer reserves the right to change a product's characteristics at any time. Products' specifications may change without notice.



HOT-GALVANIZED CONSTRUCTION

CynkoMet®
Czarna Białostocka