

Line: **DOWNHIL**



SPECIFICATION

(DOWNHIL 850, DOWNHIL)

Number of furrows		2+	2+1	3+	3+1
	mm	120x120x10			
	mm	850			
	hp	60 - 90		80 - 110	100 - 160


DOWNHIL - SPRING

	protection	7 LEAF SPRINGS			
	mouldboard	JR30, SR30, KV09, LM35, LM40			
	cm	30 - 35 - 40			
	mm	-	-	750 - 770	
	kg	-	1072	1072	1290

STANDARD EQUIPMENT:

- Mouldboard: KV09, LM35, LM40, (possibility JR30, SR30 for SPRING version)
- Extension wings for JR30, SR30, LM35, LM40
- Hydraulic cylinder with automated unit for turning
- Support wheel (Ø 710x265)
- Fork hinge cat. 2
- Front furrow adjustment

PROTECTION BY LEAF SPRINGS:

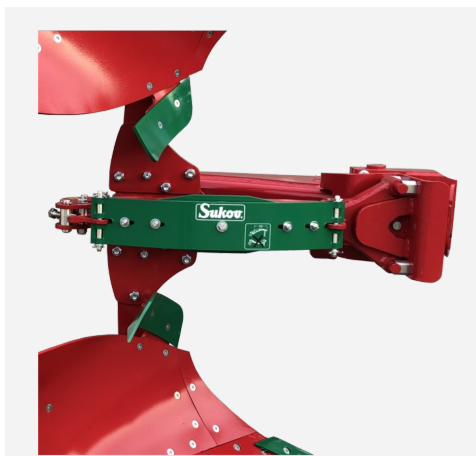

OPTIONAL EQUIPMENT:

- Trashboards
- Mouldboard PS40
- Mouldboard KV28 - extra long
- Extension wing KV09
- Memory cylinder
- Bolt skimmer type S /Skimmer Spring type S
- Bolt skimmer type K /Skimmer Spring type K
- Rolling coulter Ø 480 /Rolling coulter Spring Ø 480
- Sword landsides
- Support wheel TR315 with tread (Ø 590x255)
- Back support wheel TR315 with tread (Ø 590x255) and shock absorber
- Combined transport wheel