

ROTARY TEDDER

XT 5217 / XT 5819



ROTARY TEDDER

XT 5217 / XT 5819

Your partner in farming



When it comes to crafting the perfect hay, you need a balance of **quantity and quality**. At Sitrex, we understand that every stage of the process matters. That's why, since 1970, we've been innovating to help you preserve the feed value of your forage.

From the moment you start **harvesting** to the final **bale wrap**, Sitrex is your trusted partner. We're not just experts: we're farmers at heart and we understand the challenges you face. Together, we'll master every shade of green and gold, ensuring your forage is the best it can be.

Choose Sitrex's agricultural machinery to turn your **haymaking** into a success.

ROTARY TEDDER

XT 5217 / XT 5819

Discover the features.

Hydraulic central adjustment of
the angle in working position.



Main frame entirely boxed
without the use of joints.

Adjustment of the
angle of incidence.

Side protections without
welding.

Wheel hub suitable for
high-speed road transport.


Tires size
18x8,5-8.



ROTARY TEDDER

XT 5217 / XT 5819

Precision and reliability
in every situation.

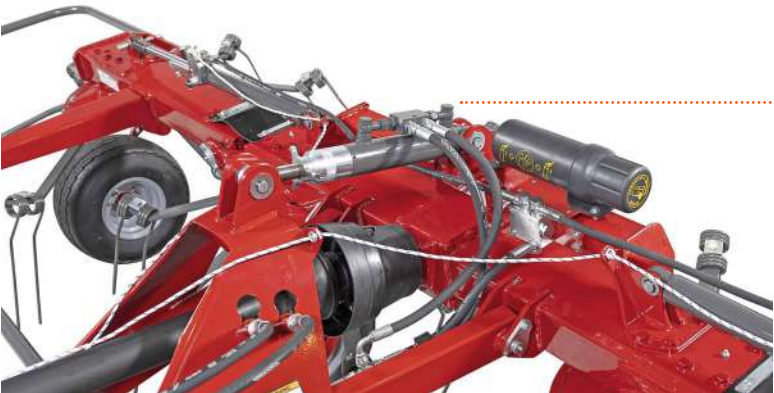


HYDRAULIC CENTRAL ADJUSTMENT OF THE ANGLE IN WORKING POSITION:
The tilting movement for switching between working and transport positions is hydraulically controlled, ensuring fast and effortless transitions directly from the tractor cab.

MAIN FRAME ENTIRELY BOXED WITHOUT USE OF JOINTS:
The rectangular box-section frame provides outstanding stability during operation and high structural strength, ensuring durability and long-term performance even under heavy-duty conditions.



FOLDING SECTION EQUIPPED WITH U-JOINT FOR TORQUE TRANSMISSION.

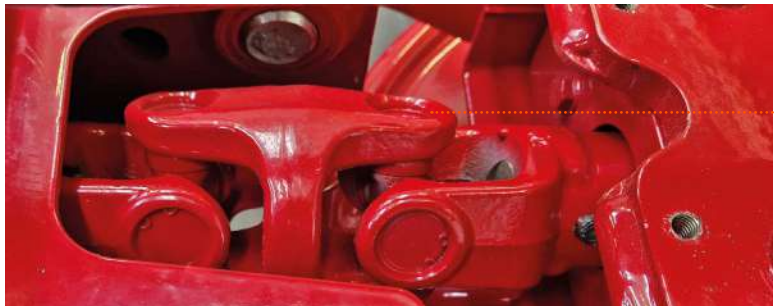

ADJUSTMENT OF THE ANGLE OF INCIDENCE:
The tine angle can be easily adjusted through preset positions, allowing perfect adaptation to different forage types and field conditions ensuring consistently optimal spreading and turning results.

WHEEL HUB SUITABLE FOR HIGH-SPEED ROAD TRANSPORT:
Equipped with tapered roller bearings, the wheel hubs are designed to withstand speeds up to **45 mph**. The bolted assembly ensures quick and easy replacement.

Specifications	XT 5217	XT 5819
Working width [m (ft)]	5.2 (17'')	5.8 (19')
Transport width [m (ft)]	3.15 (10'3'')	3.35 (11')
Transport length [m (ft)]	2.7 (9')	2.7 (9')
N° rotors	4	4
Rotors diameter [m (ft)]	1.62 (5'3'')	1.72 (5'6'')
Tires size	18x8,5-8	18x8,5-8
Weight [Kg (lbs)]	560 (1234)	580 (1278)

Your partner in farming



Organization with certified Management System ISO 9001

Viale Grecia, 22 - 06018 Trestina (PG) - ITALY | **Phone:** +39 075.854.00.21 | **Email:** sitrex@sitrex.it | **www.sitrex.com**