

Click Here To Buy Now From The Y.S. Tech USA Online Store



97x97x33mm

- **Airflow:** 25.6~32.4 CFM
- **Static Pressure:** 22.1~28.1 mm-H₂O
- **Blade / Housing:** Plastic Material UL 94V-0 P.B.T.
- **Lead Wire:** UL1007 #24 AWG
- **Weight:** 156.7 g

Model No.	Bearing	Rated Voltage VDC	Operating Voltage Range VDC	Speed RPM	Max. Airflow CFM	Max. Static Pressure mm-H ₂ O	Current mA	Power Consumption W	Life at 40°C L10 Hour	P-Q Curve	Noise Level dB(A)
BW09733012BL	2B	12	7~13.2	2600	25.6	22.1	400	4.80	80000	3	40.0
BW09733012BM	2B		7~13.2	2900	28.5	24.7	480	5.76	80000	2	42.5
BW09733012BH	2B		7~13.2	3300	32.4	28.1	740	8.88	75000	1	48.5
BW09733024BL	2B	24	12~26.4	2600	25.6	22.1	210	5.04	80000	3	40.0
BW09733024BM	2B		12~26.4	2900	28.5	24.7	280	6.72	80000	2	42.5
BW09733024BH	2B		12~26.4	3300	32.4	28.1	420	10.08	75000	1	48.5

2B: 2-ball bearing L: sintetico bearing S: sleeve bearing

Voltage Available

05 12 24 48


Bearing System Available

2B L S


Function Available

1 6 5 4 3 2 7 8 9 10 11 14 12 13

PERFORMANCE P-Q CURVE

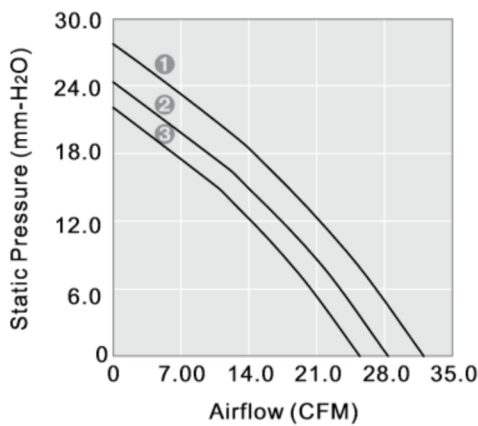

OUTLINE DIMENSIONS

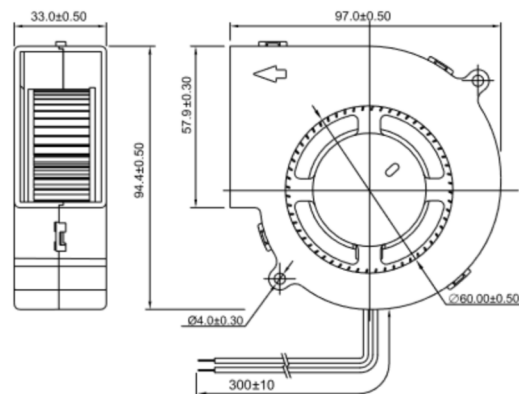

Please refer to *Model Numbering System* for bearing, function and speed level indication. Specifications are subject to changes without notice. Please refer to the formally issued product specification via contacting Y.S. TECH sales department. Visit Y.S. TECH web site at <http://www.ystechusa.com/> for updated information. Customized Specifications are designed accordingly.

DC AXIAL FAN

DC BLOWER

XTREME SERIES

AC AXIAL FAN