
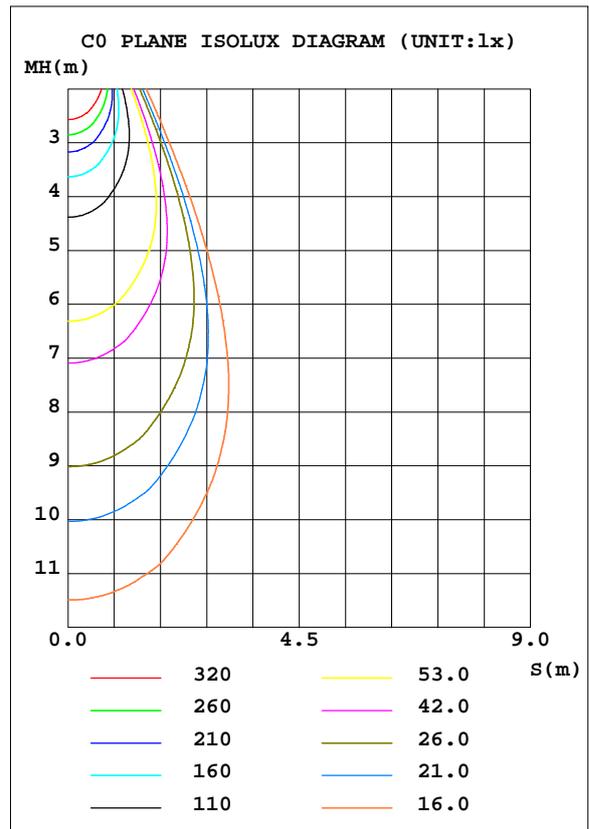


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:224.9V I:0.1588A P:15.71W PF:0.4401 Lamp Flux:1475.11x1 lm		
NAME: 201-A3-4000K	TYPE:	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	PROTECTION ANGLE:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL		Imax(cd)	2112	S/MH(C0/180)	0.72
NOMINAL POWER(W)	16	LOR(%)	100.0	S/MH(C90/270)	0.66
RATED VOLTAGE(V)	224	TOTAL FLUX(lm)	1475.1	η UP, DN(C0-180)	1.2, 40.0
NOMINAL FLUX(lm)	1475.11	CIE CLASS	DIRECT	η UP, DN(C180-360)	1.2, 57.6
LAMPS INSIDE	1	η up(%)	2.4	CIBSE SHR NOM	0.75
TEST VOLTAGE(V)	224.8	η down(%)	97.6	CIBSE SHR MAX	0.80

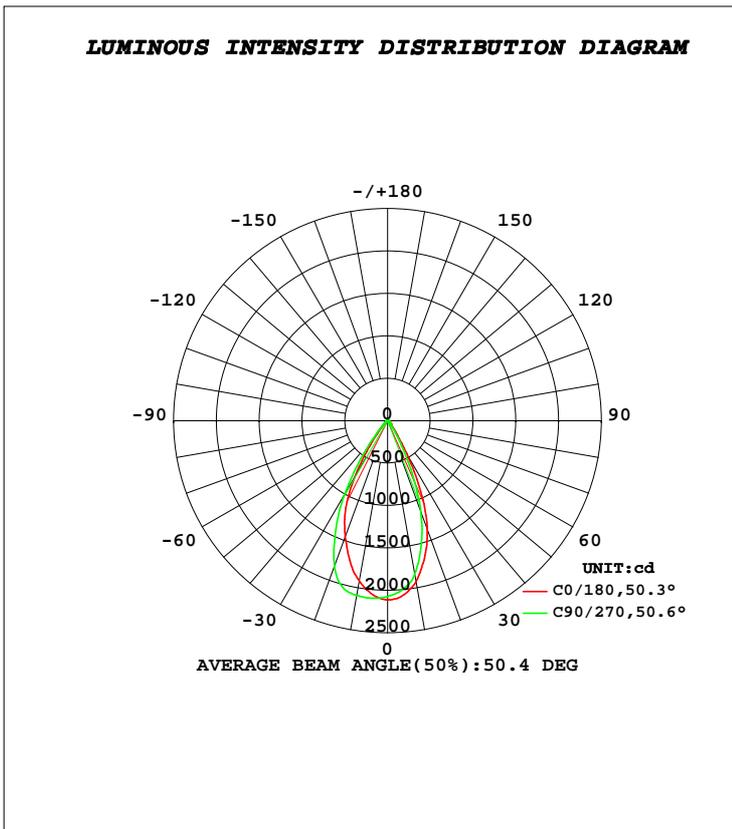

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: 游进德
Test Date: 2022-10-19

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.269
Humidity: 65.0%
Test Distance: 8.010m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
5	2066	2028	2000	2011	2055	2083	2099	2087	0- 5	49.55	49.55	3.36,3.36
10	1925	1857	1836	1857	1917	2011	2090	2012	5- 10	142.9	192.5	13,13
15	1672	1545	1521	1622	1708	1887	2033	1808	10- 15	217.3	409.8	27.8,27.8
20	1358	1153	1139	1363	1451	1669	1820	1504	15- 20	260.2	670.0	45.4,45.4
25	921.2	670.0	677.9	1042	1170	1386	1446	1106	20- 25	260.6	930.6	63.1,63.1
30	451.2	280.0	295.1	616.4	777.3	1016	1014	632.5	25- 30	211.9	1143	77.5,77.5
35	183.4	118.8	123.4	261.4	371.8	567.5	551.1	275.7	30- 35	133.9	1276	86.5,86.5
40	86.97	65.26	66.72	111.7	154.8	242.7	232.6	120.3	35- 40	69.18	1346	91.2,91.2
45	52.18	40.02	41.41	61.80	77.87	105.8	103.3	66.79	40- 45	35.60	1381	93.6,93.6
50	30.86	22.84	24.00	37.50	47.83	59.83	59.37	41.70	45- 50	21.36	1403	95.1,95.1
55	16.87	11.03	12.02	21.03	28.68	36.64	36.07	25.23	50- 55	13.62	1416	96,96
60	6.932	4.614	5.013	9.716	16.23	21.67	21.45	13.83	55- 60	8.067	1424	96.6,96.6
65	3.504	3.113	3.307	4.274	8.373	11.34	11.12	7.376	60- 65	4.398	1429	96.8,96.8
70	2.734	2.412	2.595	3.059	6.551	7.046	6.884	6.327	65- 70	2.738	1431	97,97
75	2.135	1.909	2.048	2.393	6.014	6.293	6.191	5.804	70- 75	2.285	1434	97.2,97.2
80	1.718	1.588	1.722	1.918	5.501	5.780	5.683	5.329	75- 80	2.068	1436	97.3,97.3
85	1.483	1.487	1.588	1.626	5.041	5.291	5.204	4.883	80- 85	1.891	1438	97.5,97.5
90	1.420	1.554	1.592	1.559	4.623	4.850	4.777	4.500	85- 90	1.758	1439	97.6,97.6
95	1.492	1.718	1.727	1.645	4.283	4.485	4.408	4.187	90- 95	1.668	1441	97.7,97.7
100	1.731	2.039	2.014	1.818	3.995	4.164	4.091	3.929	95-100	1.616	1443	97.8,97.8
105	2.153	2.571	2.532	2.144	3.818	3.924	3.852	3.785	100-105	1.616	1444	97.9,97.9
110	2.780	3.319	3.293	2.715	3.856	3.804	3.760	3.775	105-110	1.693	1446	98,98
115	3.607	4.247	4.240	3.513	4.111	3.837	3.838	4.024	110-115	1.849	1448	98.1,98.1
120	4.542	5.291	5.295	4.476	4.601	4.168	4.159	4.518	115-120	2.073	1450	98.3,98.3
125	5.605	6.380	6.392	5.560	5.320	4.757	4.716	5.213	120-125	2.333	1452	98.4,98.4
130	6.694	7.469	7.466	6.682	6.208	5.520	5.483	6.076	125-130	2.591	1455	98.6,98.6
135	7.792	8.525	8.502	7.801	7.207	6.445	6.396	7.083	130-135	2.809	1458	98.8,98.8
140	8.834	9.465	9.424	8.827	8.247	7.453	7.369	8.111	135-140	2.948	1461	99,99
145	9.698	10.19	10.15	9.709	9.201	8.456	8.376	9.060	140-145	2.974	1464	99.2,99.2
150	10.35	10.62	10.62	10.36	9.987	9.357	9.272	9.813	145-150	2.861	1466	99.4,99.4
155	10.62	10.69	10.74	10.74	10.52	10.01	9.996	10.28	150-155	2.599	1469	99.6,99.6
160	10.52	10.44	10.57	10.77	10.60	10.38	10.41	10.45	155-160	2.206	1471	99.7,99.7
165	10.24	10.10	10.34	10.53	10.36	10.44	10.43	10.33	160-165	1.722	1473	99.9,99.9
170	10.12	9.929	10.25	10.23	10.12	10.23	10.27	10.12	165-170	1.215	1474	99.9,99.9
175	10.16	10.01	10.31	10.18	10.14	10.09	10.27	10.05	170-175	0.7257	1475	100,100
180	10.25	10.13	10.42	10.19	10.29	10.08	10.45	10.14	175-180	0.2435	1475	100,100
DEG	LUMINOUS INTENSITY:cd								UNIT:lm			


C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: LOW
 Temperature:25.3DEG
 Operators:游进德
 Test Date:2022-10-19

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.269
 Humidity:65.0%
 Test Distance:8.010m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:224.9V I:0.1588A P:15.71W PF:0.4401 Lamp Flux:1475.11x1 lm		
NAME: 201-A3-4000K	TYPE:	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	PROTECTION ANGLE:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.18	1.18	1.18	1.15	1.15	1.15	1.10	1.10	1.10	1.05	1.05	1.05	.00	.00	.00	.98
1.0	1.10	1.08	1.06	1.08	1.06	1.04	1.03	1.02	1.00	.99	.98	.97	.95	.94	.94	.92
2.0	1.03	.99	.96	1.01	.97	.94	.97	.95	.92	.94	.92	.90	.91	.89	.88	.86
3.0	.96	.92	.88	.95	.90	.87	.92	.88	.85	.89	.86	.84	.87	.84	.82	.80
4.0	.91	.85	.81	.89	.84	.81	.87	.83	.79	.85	.81	.78	.82	.79	.77	.76
5.0	.85	.80	.76	.84	.79	.75	.82	.78	.74	.80	.76	.73	.78	.75	.73	.71
6.0	.80	.75	.71	.79	.74	.70	.78	.73	.70	.76	.72	.69	.75	.71	.68	.67
7.0	.76	.70	.66	.75	.70	.66	.74	.69	.66	.72	.68	.65	.71	.67	.65	.63
8.0	.72	.66	.63	.71	.66	.62	.70	.65	.62	.69	.65	.62	.68	.64	.61	.60
9.0	.68	.63	.59	.68	.63	.59	.67	.62	.59	.66	.61	.58	.65	.61	.58	.57
10.0	.65	.60	.56	.65	.59	.56	.64	.59	.56	.63	.58	.55	.62	.58	.55	.54

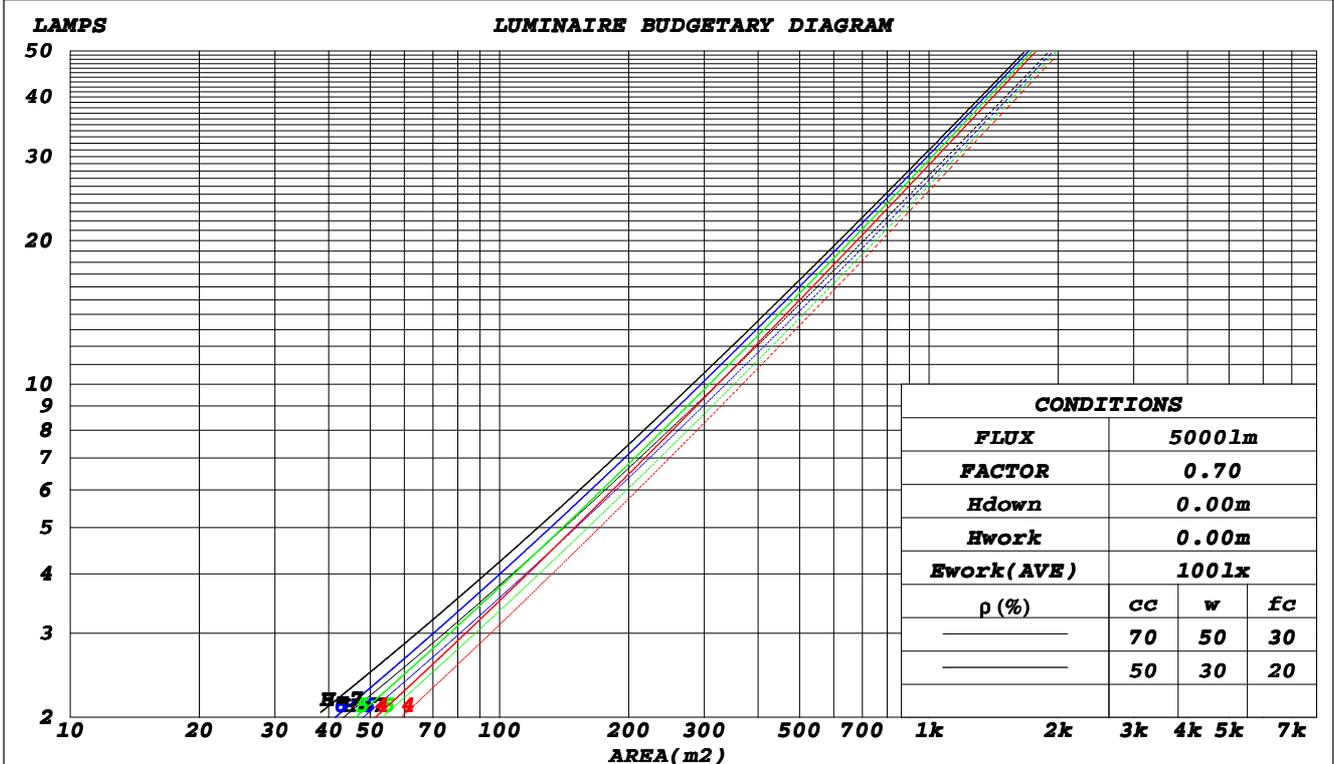

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: LOW
 Temperature: 25.3DEG
 Operators: 游进德
 Test Date: 2022-10-19

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.269
 Humidity: 65.0%
 Test Distance: 8.010m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:224.9V I:0.1588A P:15.71W PF:0.4401 Lamp Flux:1475.11x1 lm		
NAME: 201-A3-4000K	TYPE:	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	PROTECTION ANGLE:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.176	.100	.032	.168	.096	.030	.154	.088	.028	.141	.082	.026	.130	.075	.024	
2.0	.166	.091	.028	.160	.088	.027	.148	.082	.026	.137	.077	.024	.127	.072	.023	
3.0	.157	.084	.025	.152	.081	.024	.142	.077	.023	.132	.072	.022	.123	.068	.021	
4.0	.149	.077	.023	.144	.075	.022	.135	.072	.021	.127	.068	.021	.120	.065	.020	
5.0	.141	.072	.021	.137	.071	.021	.130	.067	.020	.122	.065	.019	.116	.062	.019	
6.0	.135	.068	.019	.131	.066	.019	.124	.064	.019	.118	.061	.018	.112	.059	.017	
7.0	.128	.064	.018	.125	.062	.018	.119	.060	.017	.113	.058	.017	.108	.056	.016	
8.0	.123	.060	.017	.120	.059	.017	.114	.057	.016	.109	.055	.016	.104	.054	.016	
9.0	.118	.057	.016	.115	.056	.016	.110	.054	.015	.105	.053	.015	.101	.051	.015	
10.0	.113	.054	.015	.110	.053	.015	.106	.052	.015	.102	.050	.014	.098	.049	.014	

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.209	.209	.209	.179	.179	.179	.122	.122	.122	.070	.070	.070	.022	.022	.022	
1.0	.190	.176	.164	.162	.151	.141	.111	.104	.097	.064	.060	.057	.020	.019	.018	
2.0	.174	.151	.132	.149	.130	.114	.102	.090	.080	.059	.052	.047	.019	.017	.015	
3.0	.162	.132	.109	.139	.114	.095	.095	.079	.066	.055	.046	.039	.018	.015	.013	
4.0	.151	.118	.092	.130	.102	.080	.089	.071	.056	.052	.042	.033	.017	.014	.011	
5.0	.142	.106	.079	.122	.092	.069	.084	.064	.049	.049	.038	.029	.016	.012	.010	
6.0	.135	.097	.070	.116	.084	.061	.080	.059	.043	.046	.034	.025	.015	.011	.008	
7.0	.128	.089	.062	.110	.077	.054	.076	.054	.038	.044	.032	.023	.014	.010	.008	
8.0	.122	.083	.056	.105	.072	.049	.073	.050	.035	.042	.030	.021	.014	.010	.007	
9.0	.117	.078	.051	.101	.067	.045	.070	.047	.032	.041	.028	.019	.013	.009	.006	
10.0	.112	.073	.047	.097	.064	.041	.067	.045	.029	.039	.026	.017	.013	.009	.006	

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: LOW
 Temperature: 25.3DEG
 Operators: 游进德
 Test Date: 2022-10-19

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.269
 Humidity: 65.0%
 Test Distance: 8.010m [K=1.0000]
 Remarks:

Uncorrected UGR Table

Test:U:224.9V I:0.1588A P:15.71W PF:0.4401 Lamp Flux:1475.11x1 lm										
NAME: 201-A3-4000K					TYPE:			WEIGHT:		
DIM.:					SPEC.:			SERIAL No.:		
MFR.: EVERFINE					SUR.:			PROTECTION ANGLE:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	3.4	4.3	3.6	4.5	4.7	1.7	2.6	2.0	2.8	3.0
3H	3.3	4.1	3.5	4.3	4.6	1.6	2.5	1.9	2.7	2.9
4H	3.2	4.0	3.5	4.2	4.5	1.6	2.4	1.9	2.6	2.9
6H	3.2	3.9	3.5	4.2	4.5	1.6	2.3	1.9	2.6	2.9
8H	3.2	3.8	3.5	4.1	4.4	1.6	2.3	2.0	2.6	2.9
12H	3.2	3.8	3.5	4.1	4.5	1.7	2.3	2.0	2.6	3.0
4H 2H	3.1	3.9	3.5	4.2	4.4	1.5	2.3	1.9	2.6	2.8
3H	3.0	3.7	3.4	4.0	4.3	1.5	2.1	1.8	2.4	2.8
4H	3.0	3.6	3.4	3.9	4.3	1.5	2.1	1.8	2.4	2.8
6H	3.0	3.5	3.4	3.9	4.3	1.5	2.0	1.9	2.4	2.8
8H	3.0	3.5	3.4	3.9	4.3	1.6	2.0	2.0	2.4	2.9
12H	3.0	3.5	3.5	3.9	4.4	1.7	2.1	2.1	2.5	3.0
8H 4H	2.9	3.4	3.3	3.8	4.2	1.4	1.9	1.8	2.2	2.7
6H	2.9	3.3	3.4	3.7	4.2	1.4	1.9	1.9	2.3	2.8
8H	2.9	3.3	3.4	3.8	4.3	1.6	1.9	2.0	2.4	2.9
12H	3.1	3.4	3.6	3.9	4.4	1.8	2.1	2.3	2.6	3.1
12H 4H	2.8	3.3	3.3	3.7	4.1	1.3	1.8	1.8	2.2	2.6
6H	2.9	3.2	3.4	3.7	4.2	1.4	1.8	1.9	2.2	2.7
8H	2.9	3.2	3.4	3.7	4.2	1.6	1.9	2.1	2.4	2.9
Variations with the observer position at spacings:										
S = 1.0H	+ 3.1 / - 4.2					+ 2.2 / - 3.7				
1.5H	+ 4.4 / - 4.1					+ 3.2 / - 3.4				
2.0H	+ 4.6 / - 4.0					+ 4.0 / - 3.2				

CIE Pub.117 Corrected 1475 lm Total Lamp Luminous Flux.(8log(F/F0) = 1.4)

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:游进德
Test Date:2022-10-19

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.269
Humidity:65.0%
Test Distance:8.010m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:224.9V I:0.1588A P:15.71W PF:0.4401 Lamp Flux:1475.11x1 lm		
NAME: 201-A3-4000K	TYPE:	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	PROTECTION ANGLE:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	86	80	76	85	79	76	85	79	75	72
0.80	93	88	84	93	87	84	91	86	83	79
1.00	98	92	89	97	92	88	95	91	88	83
1.25	102	97	93	101	96	93	99	95	92	87
1.50	105	100	96	103	99	96	101	97	95	90
2.00	107	103	100	106	102	99	103	100	97	91
2.50	109	105	102	107	104	101	104	101	99	92
3.00	111	107	104	109	106	103	105	103	101	94
4.00	113	110	108	111	108	106	107	105	103	95
5.00	114	112	110	112	110	108	107	106	105	96
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: 游进德
Test Date: 2022-10-19

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.269
Humidity: 65.0%
Test Distance: 8.010m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:224.9V I:0.1588A P:15.71W PF:0.4401 Lamp Flux:1475.11x1 lm		
NAME: 201-A3-4000K	TYPE:	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	PROTECTION ANGLE:

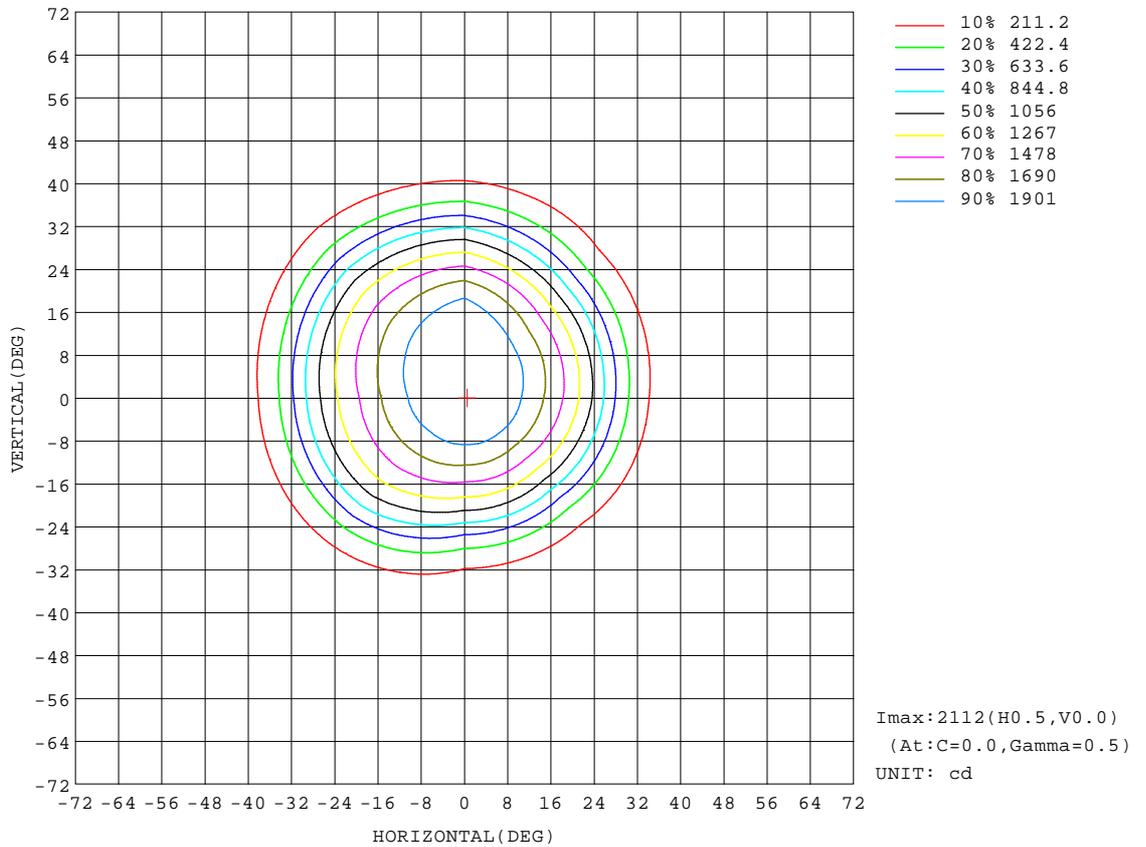


C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: LOW
 Temperature: 25.3DEG
 Operators: 游进德
 Test Date: 2022-10-19

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.269
 Humidity: 65.0%
 Test Distance: 8.010m [K=1.0000]
 Remarks:

AAI CURVES

Test:U:224.9V I:0.1588A P:15.71W PF:0.4401 Lamp Flux:1475.11x1 lm		
NAME: 201-A3-4000K	TYPE:	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	PROTECTION ANGLE:

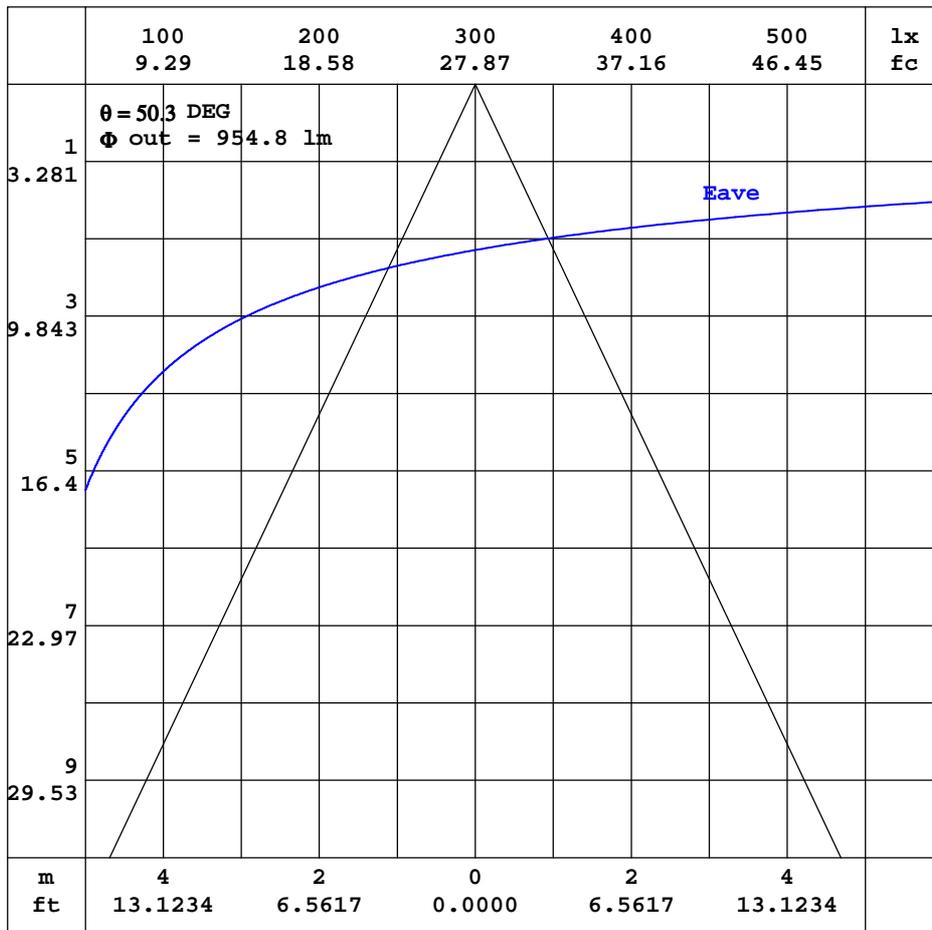


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: LOW
 Temperature: 25.3DEG
 Operators: 游进德
 Test Date: 2022-10-19

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.269
 Humidity: 65.0%
 Test Distance: 8.010m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM


Test:U:224.9V I:0.1588A P:15.71W PF:0.4401 Lamp Flux:1475.11x1 lm		
NAME: 201-A3-4000K	TYPE:	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	PROTECTION ANGLE:

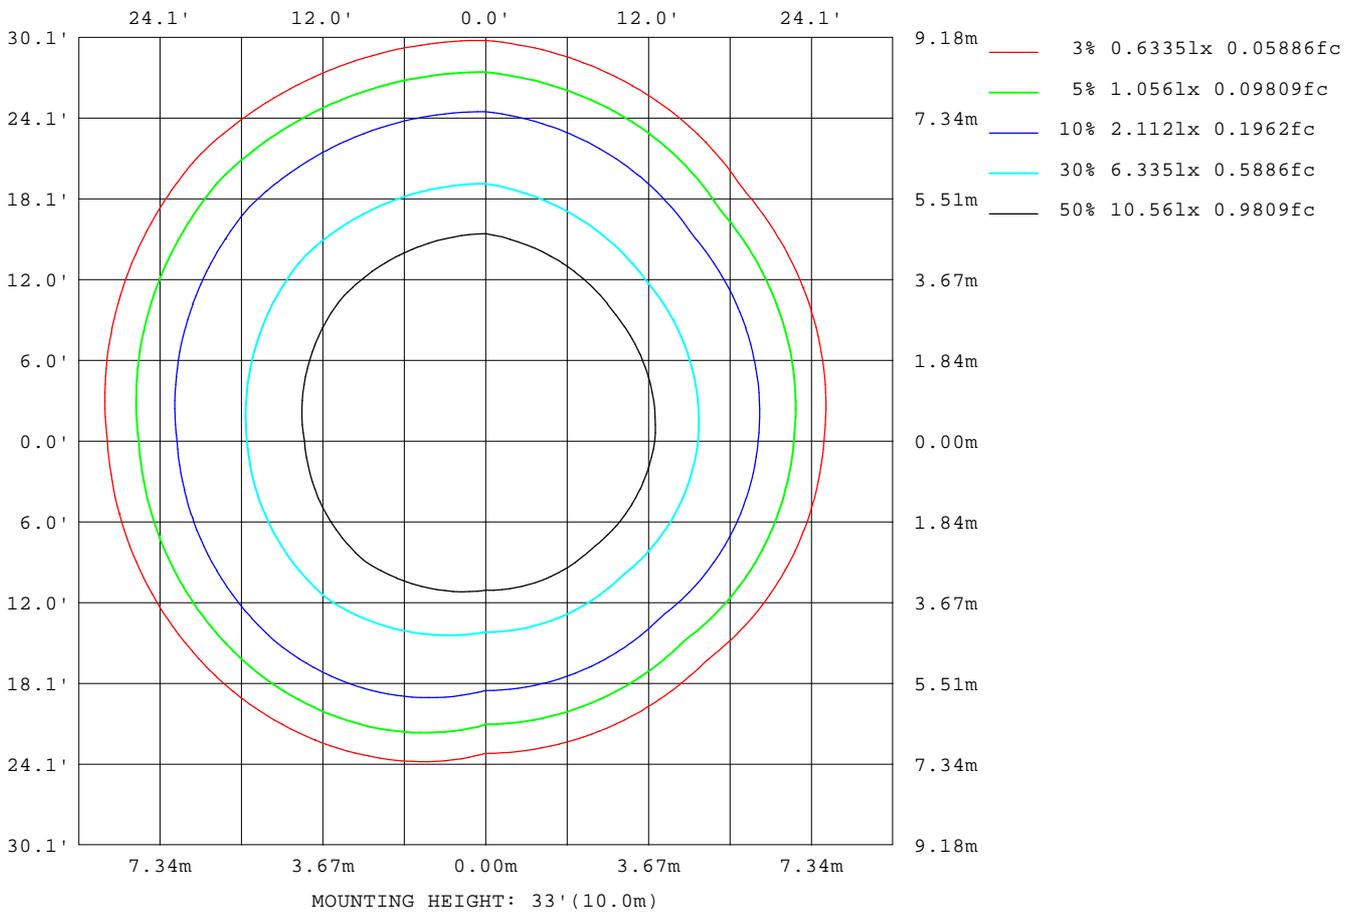

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: LOW
 Temperature: 25.3DEG
 Operators: 游进德
 Test Date: 2022-10-19

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.269
 Humidity: 65.0%
 Test Distance: 8.010m [K=1.0000]
 Remarks:

Planar Illuminance Curve

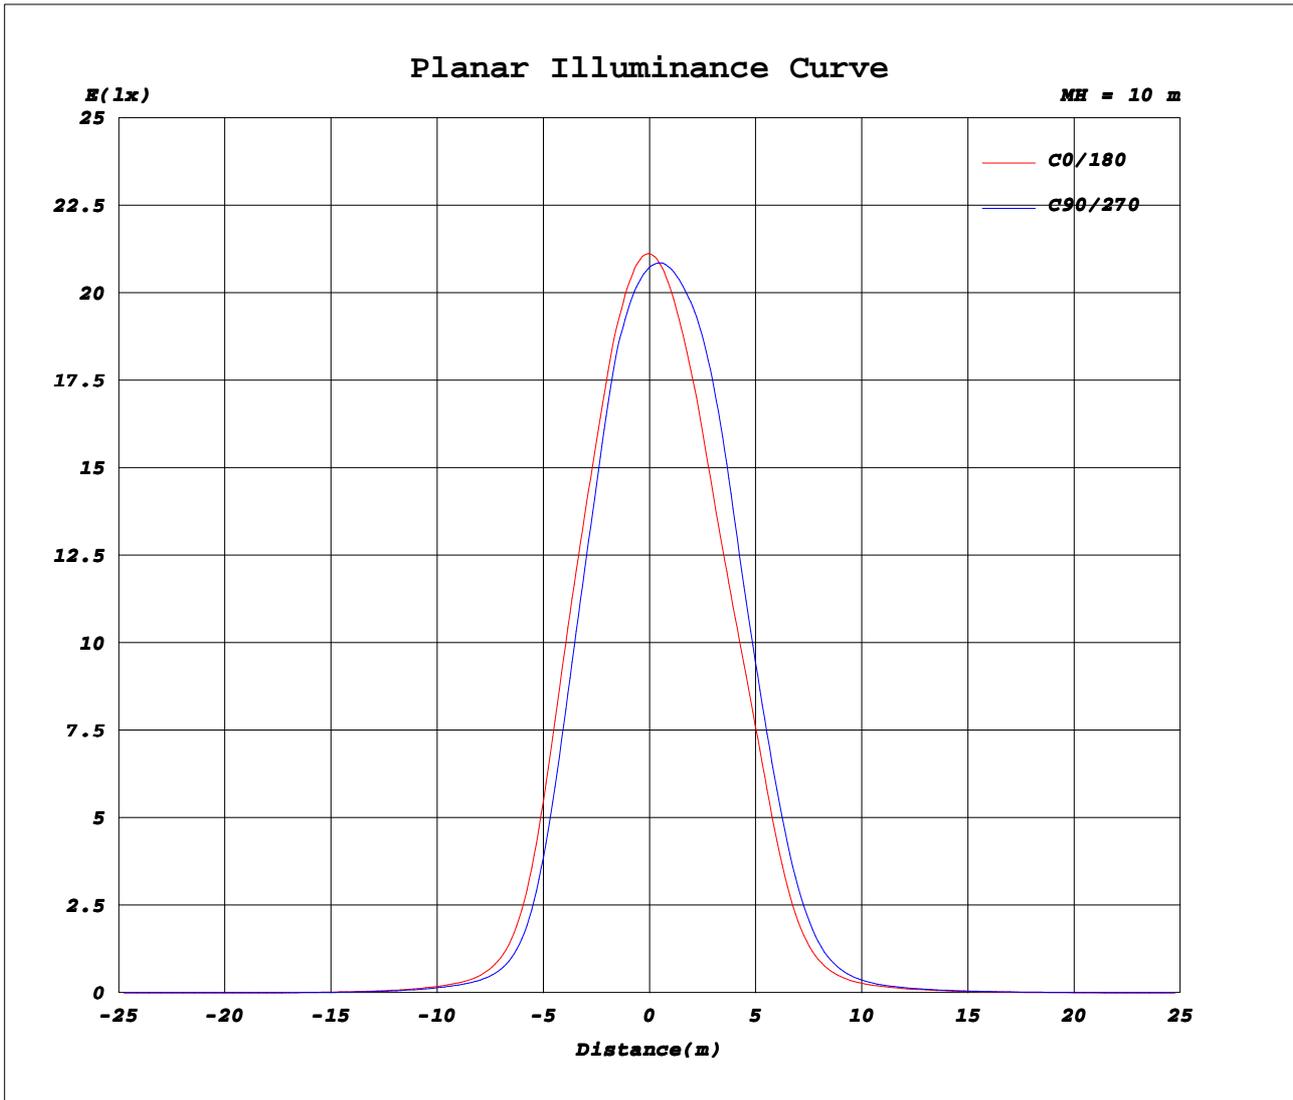

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: 游进德
Test Date: 2022-10-19

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.269
Humidity: 65.0%
Test Distance: 8.010m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:224.9V I:0.1588A P:15.71W PF:0.4401 Lamp Flux:1475.11x1 lm		
NAME: 201-A3-4000K	TYPE:	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	PROTECTION ANGLE:

Table--1

UNIT: cd

C (DEG) \ γ (DEG)	0	45	90	135	180	225	270	315											
0	2112	2091	2073	2088	2112	2091	2073	2088											
5	2066	2028	2000	2011	2055	2083	2099	2087											
10	1925	1857	1836	1857	1917	2011	2090	2012											
15	1672	1545	1521	1622	1708	1887	2033	1808											
20	1358	1153	1139	1363	1451	1669	1820	1504											
25	921	670	678	1042	1170	1386	1446	1106											
30	451	280	295	616	777	1016	1014	633											
35	183	119	123	261	372	568	551	276											
40	87.0	65.3	66.7	112	155	243	233	120											
45	52.2	40.0	41.4	61.8	77.9	106	103	66.8											
50	30.9	22.8	24.0	37.5	47.8	59.8	59.4	41.7											
55	16.9	11.0	12.0	21.0	28.7	36.6	36.1	25.2											
60	6.93	4.61	5.01	9.72	16.2	21.7	21.4	13.8											
65	3.50	3.11	3.31	4.27	8.37	11.3	11.1	7.38											
70	2.73	2.41	2.60	3.06	6.55	7.05	6.88	6.33											
75	2.13	1.91	2.05	2.39	6.01	6.29	6.19	5.80											
80	1.72	1.59	1.72	1.92	5.50	5.78	5.68	5.33											
85	1.48	1.49	1.59	1.63	5.04	5.29	5.20	4.88											
90	1.42	1.55	1.59	1.56	4.62	4.85	4.78	4.50											
95	1.49	1.72	1.73	1.65	4.28	4.48	4.41	4.19											
100	1.73	2.04	2.01	1.82	4.00	4.16	4.09	3.93											
105	2.15	2.57	2.53	2.14	3.82	3.92	3.85	3.78											
110	2.78	3.32	3.29	2.71	3.86	3.80	3.76	3.77											
115	3.61	4.25	4.24	3.51	4.11	3.84	3.84	4.02											
120	4.54	5.29	5.29	4.48	4.60	4.17	4.16	4.52											
125	5.61	6.38	6.39	5.56	5.32	4.76	4.72	5.21											
130	6.69	7.47	7.47	6.68	6.21	5.52	5.48	6.08											
135	7.79	8.53	8.50	7.80	7.21	6.45	6.40	7.08											
140	8.83	9.46	9.42	8.83	8.25	7.45	7.37	8.11											
145	9.70	10.2	10.1	9.71	9.20	8.46	8.38	9.06											
150	10.4	10.6	10.6	10.4	9.99	9.36	9.27	9.81											
155	10.6	10.7	10.7	10.7	10.5	10.0	10.00	10.3											
160	10.5	10.4	10.6	10.8	10.6	10.4	10.4	10.5											
165	10.2	10.1	10.3	10.5	10.4	10.4	10.4	10.3											
170	10.1	9.93	10.3	10.2	10.1	10.2	10.3	10.1											
175	10.2	10.0	10.3	10.2	10.1	10.1	10.3	10.0											
180	10.3	10.1	10.4	10.2	10.3	10.1	10.4	10.1											

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: LOW
 Temperature: 25.3DEG
 Operators: 游进德
 Test Date: 2022-10-19

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.269
 Humidity: 65.0%
 Test Distance: 8.010m [K=1.0000]
 Remarks: