

FROM THE FOUNDER OF THE #VIKISEWS BRAND




Back in 2016, when I was working on my first set of sewing instructions, I was trying to write them in such a way that even a complete beginner could easily understand and use them to create their very first garment. These instructions laid the foundation for the Vikisews brand, its vision and its mission. I wanted to create modern patterns with the utmost detailed and clear instructions.

Now, with each new collection we are constantly improving our instructions, amending them and adding more relevant details. By the time the final product reaches you, our drafters, correctors, and editors would have spent weeks perfecting every word and every photograph. If you compile a few of our instructions together, you will get a sewing manual that will assist you in sewing all kinds of garments at any difficulty level.

And I would be very happy if these instructions helped you to turn your hobby into a lifelong passion... Enjoy the process! Create your ultimate dream wardrobe! Wear your garments proudly for years to come!

If you have any questions, please contact us at info@vikisews.com — we are always there to help.

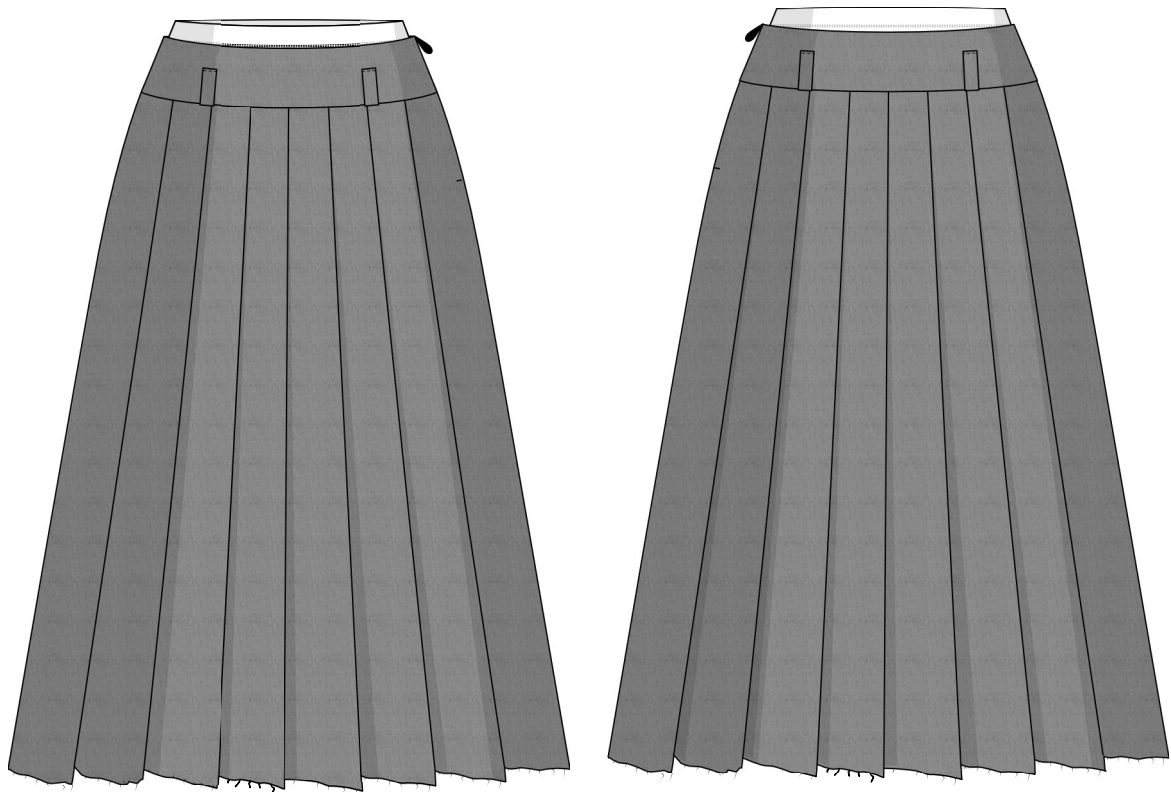

BLAIR PATTERN DESCRIPTION

Blair is a semi-fitted pleated A-line skirt that sits 6 cm (2 3/8") below the natural waistline. The skirt features an applied yoke with topstitched belt loops. The skirt fastens with an invisible zipper in the side seam. Blair is below-knee length. The set includes knit briefs.



IMPORTANT!

The contents of this pattern are copyright protected and belong exclusively to Vikisews. You may use Vikisews patterns for personal use. It is prohibited to share Vikisews patterns and instructions with third parties, as well as to publish patterns and instructions online for public access. **Non-compliance with the mentioned rules is a violation of the US copyright law and may result in civil liability and criminal prosecution.**

You may use Vikisews patterns for commercial use, to sew custom-made garments and/or create fashion collections, on the condition that the patterns are solely used in a manufacturing setting and are not further shared with individuals.

TOTAL EASE ALLOWANCE

SKIRT

	Waistline ease at the upper edge of the yoke (estimated)	Hipline ease
cm	9.4–9.5	1.6–4.7
inches	3 3/4	5/8–1 7/8

BRIEFS

	Waistline ease
cm	-3.4 – (-11.1)
inches	-1 3/8 – (-4 3/8)

GARMENT LENGTH

Height, cm	Length including yoke (long skirt), cm	Length including yoke (short skirt), cm
1 (154–160)	71.7–73.1	34
2 (162–168)	74.7–76.1	37
3 (170–176)	77.7–79.1	40
4 (178–184)	80.7–82.1	43

Height, ft	Length including yoke (long skirt), in	Length including yoke (short skirt), in
1 (5'1"–5'3")	28 1/4–28 3/4	13 3/8
2 (5'4"–5'6")	29 3/8–30	14 5/8
3 (5'7"–5'9")	30 5/8–31 1/8	15 3/4
4 (5'10"–6'1")	31 3/4–32 3/8	16 7/8

PATTERN PIECES LIST

1. From main fabric (skirt):

- front — cut 1
- back — cut 1
- front yoke — cut 2
- back yoke — cut 2
- belt loops — cut 1 (4 pcs)

2. From additional fabric (briefs):

- front — cut 1 on fold
- back — cut 1 on fold
- binding — cut 2

IMPORTANT! Don't forget to transfer all pattern markings and notches onto the fabric.

3. From interfacing:

- front yoke — cut 2
- back yoke — cut 2

SEAM ALLOWANCES

All pattern pieces include seam allowances as follows:

- garment hem allowance — 3 cm (1 1/8")
- all other edges — 1 cm (3/8")

IMPORTANT! The skirt shown in the photo has the hem allowance trimmed off and features a raw bottom edge.
Take this into account when laying out pattern pieces on the fabric.



Working from the wrong side of the front and back pieces, press the inner fold of each pleat, using the hand stitches as a guide.

Remove the hand stitches after pressing.

Important! After pressing all the pleats, we recommend laying the entire skirt out on a flat surface, with the pleats closed, and letting it dry completely so that the pleats set.



With the right side facing up, overlock the side edges of the front piece.



With the right side facing up, overlock the side edges of the back piece.