

FROM THE FOUNDER OF THE #VIKISEWS BRAND



Back in 2016, when I was working on my first set of sewing instructions, I was trying to write them in such a way that even a complete beginner could easily understand and use them to create their very first garment. These instructions laid the foundation for the Vikisews brand, its vision and its mission. I wanted to create modern patterns with the utmost detailed and clear instructions.

Now, with each new collection we are constantly improving our instructions, amending them and adding more relevant details. By the time the final product reaches you, our drafters, correctors, and editors would have spent weeks perfecting every word and every photograph. If you compile a few of our instructions together, you will get a sewing manual that will assist you in sewing all kinds of garments at any difficulty level.

And I would be very happy if these instructions helped you to turn your hobby into a lifelong passion... Enjoy the process! Create your ultimate dream wardrobe! Wear your garments proudly for years to come!

If you have any questions, please contact us at info@vikisews.com — we are always there to help.



NISA PATTERN DESCRIPTION

Nisa is a half-circle wrap skirt. It has an applied waistband that extends into long ties. The skirt is above-knee length.



IMPORTANT!

The contents of this pattern are copyright protected and belong exclusively to Vikisews. You may use Vikisews patterns for personal use. It is prohibited to share Vikisews patterns and instructions with third parties, as well as to publish patterns and instructions online for public access. **Non-compliance with the mentioned rules is a violation of the US copyright law and may result in civil liability and criminal prosecution.**

You may use Vikisews patterns for commercial use, to sew custom-made garments and/or create fashion collections, on the condition that the patterns are solely used in a manufacturing setting and are not further shared with individuals.

TOTAL EASE ALLOWANCE

	Waistline ease	Hipline ease
cm	1.4–2.8	41.1–41.8
inches	1/2–1 1/8	16 1/8–16 1/2

GARMENT LENGTH

Height, cm	Garment length including waistband, cm	Height, ft	Garment length including waistband, in
1 (154–160)	41.5	1 (5'1"–5'3")	16 3/8
2 (162–168)	44.5	2 (5'4"–5'6")	17 1/2
3 (170–176)	47.5	3 (5'7"–5'9")	18 3/4
4 (178–184)	50.5	4 (5'10"–6'1")	19 7/8

SUGGESTED FABRIC

To sew this skirt, choose dress-weight fabrics with the following properties:

- medium-weight, pliable, soft, opaque, non-stretch or low-stretch
- the fiber content can include natural fibers (wool, silk, cotton, linen), artificial fibers (viscose), blends (wool + silk, wool + polyester, cotton + viscose, etc.), and synthetics (polyester, polyester + elastane)
- the following fabrics are recommended: satin, dress-weight viscose, natural or artificial silk.

Attention! We do not recommend stretchy knit materials, heavyweight, structured fabrics (suiting), or thin, sheer fabrics (organza, chiffon).

The skirt in the photos is made of artificial silk. The fabric is medium-weight, pliable, soft, and without stretch. The fiber content is 100% polyester.

PATTERN PIECES LIST

1. From main fabric:

- waistband – cut 1
- waist tie – cut 2
- right front – cut 1
- left front – cut 1
- back – cut 1.

2. From interfacing:

- waistband – cut 1.


***IMPORTANT!** Don't forget to transfer all pattern markings and notches onto the fabric.*

SEAM ALLOWANCES

All pattern pieces include 1 cm (3/8") seam allowances. Take this into account when laying out pattern pieces on the fabric.

CUTTING LAYOUT

Main fabric, 140 cm (55") wide, with a directional print/nap, cut on a single layer, for sizes 34–36 in height 1; main fabric, 150 cm (59") wide, with a directional print/nap, cut on a single layer, for sizes 34–52 in heights 1–2, sizes 34–44 in height 3 and sizes 34–36 in height 4

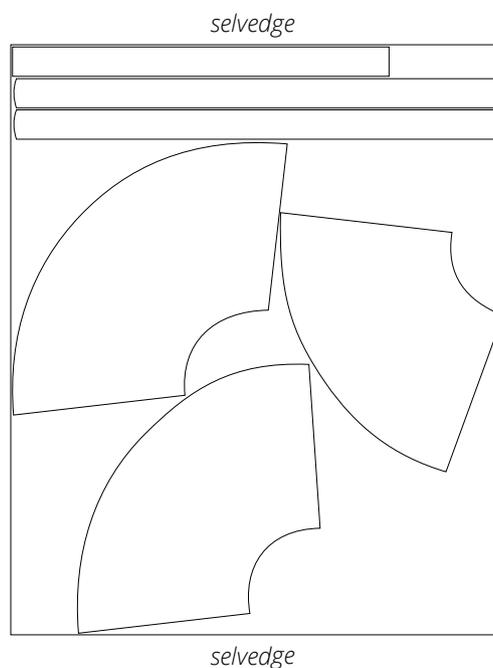




Stitch the side seams on the sewing machine with a 5 mm (just under 1/4") seam allowance. Backstitch at the beginning and end of each seam. Remove the basting stitches.



Press the side seams flat.

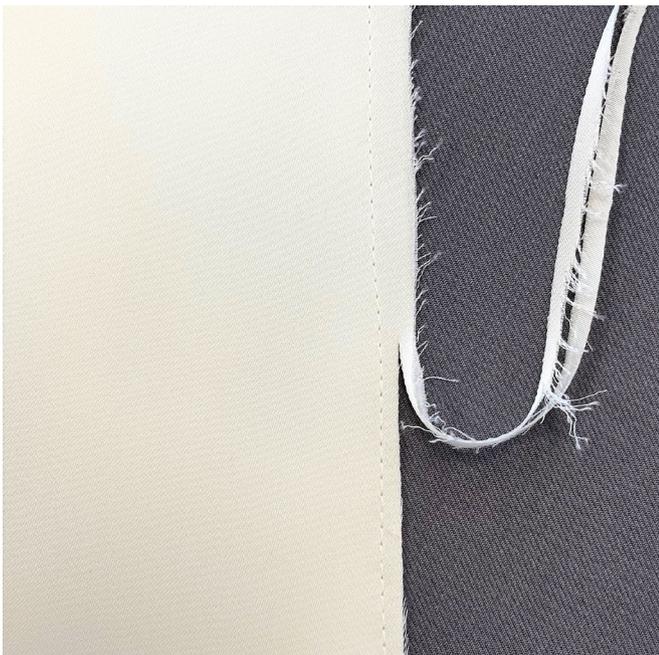

Trim the seam allowances down to 3 mm (1/8").