

FROM THE FOUNDER OF THE #VIKISEWS BRAND



Back in 2016, when I was working on my first set of sewing instructions, I was trying to write them in such a way that even a complete beginner could easily understand and use them to create their very first garment. These instructions laid the foundation for the Vikisews brand, its vision and its mission. I wanted to create modern patterns with the utmost detailed and clear instructions.

Now, with each new collection we are constantly improving our instructions, amending them and adding more relevant details. By the time the final product reaches you, our drafters, correctors, and editors would have spent weeks perfecting every word and every photograph. If you compile a few of our instructions together, you will get a sewing manual that will assist you in sewing all kinds of garments at any difficulty level.

And I would be very happy if these instructions helped you to turn your hobby into a lifelong passion... Enjoy the process! Create your ultimate dream wardrobe! Wear your garments proudly for years to come!

If you have any questions, please contact us at info@vikisews.com — we are always there to help.



DANNAY PATTERN DESCRIPTION

Dannay is a semi-fitted lined peplum corset belt with an accentuated waist. The silhouette is shaped with front and back princess seams. The decorative placket with grommets forms the lace-up front. The shaped hem features decorative straps with metal sliders and garter clips. The corset belt has an applied shaped waistband made up of several parts. Dannay fastens with an exposed separating zipper and features a placket in the center back seam. The corset belt is decorated with topstitching and is below-hip length.



IMPORTANT!

The contents of this pattern are copyright protected and belong exclusively to Vikisews. You may use Vikisews patterns for personal use. It is prohibited to share Vikisews patterns and instructions with third parties, as well as to publish patterns and instructions online for public access. **Non-compliance with the mentioned rules is a violation of the US copyright law and may result in civil liability and criminal prosecution.**

You may use Vikisews patterns for commercial use, to sew custom-made garments and/or create fashion collections, on the condition that the patterns are solely used in a manufacturing setting and are not further shared with individuals.

TOTAL EASE ALLOWANCE

	Waistline ease	Hipline ease
cm	1.6-1.7	17-20
inches	5/8	6 3/4-7 7/8

GARMENT LENGTH

Height, cm	Center back length from waist down, cm	Height, ft	Center back length from waist down, in
1 (154-160)	18	1 (5'1"-5'3")	7 1/8
2 (162-168)	20	2 (5'4"-5'6")	7 7/8
3 (170-176)	22	3 (5'7"-5'9")	8 5/8
4 (178-184)	24	4 (5'10"-6'1")	9 1/2

SUGGESTED FABRIC

To sew this corset belt, choose fabrics with the following properties:

- medium weight, soft, non- or low-stretch, opaque
- the fiber content can include natural fibers (cotton), artificial fibers (viscose), blends (cotton + viscose, etc.), synthetics (polyester), polyurethane, polyvinyl chloride (PVC) with a knit or woven backing
- the following fabrics are recommended: heavyweight denim, leather, faux leather, suede

Attention! We do not recommend thin dress-weight fabrics.

For the lining, choose lining fabrics made of artificial fibers (viscose), blends (viscose + elastane, viscose + polyester), or synthetics (polyester, polyester + elastane).

The corset belt in the photo is made of faux leather. The fabric is medium weight, pliable, soft, low-stretch and has a knit backing. The wrong side has a suede effect. The fiber content is a blend of polyester (45%) and polyurethane (55%). The fabric weight is 350 g/m².

The lining's fiber content is a blend of viscose (45%) and polyester (55%). The fabric weight is 100 g/m².

The interfacing weight is 70 g/m².

14. Matching thread — 1 spool for the sewing machine

15. Matching topstitching thread (for example, Madeira No. 35) —1 spool

TOOLS AND EQUIPMENT

- sewing machine for construction
- one-sided foot for the sewing machine
- teflon or walking foot for the sewing machine
- press tool for installing grommets

PATTERN PIECES LIST

1. From main fabric:

- inner front panel — cut 1
- center front peplum — cut 2
- side front peplum — cut 2
- center back peplum — cut 2
- side back peplum — cut 2
- center front waistband — cut 2
- side front waistband — cut 2
- center back waistband — cut 2
- side back waistband — cut 2
- zipper placket — cut 1

2. From lining fabric:


- center front peplum lining — cut 1 on fold
- side front peplum — cut 2
- center back peplum — cut 2
- side back peplum — cut 2
- center front waistband lining — cut 1 on fold
- side front waistband — cut 2
- center back waistband — cut 2
- side back waistband — cut 2
- zipper placket — cut 1
- front facing — cut 2

3. From interfacing:


- inner front panel — cut 1
- center front peplum — cut 2
- side front peplum — cut 2
- center back peplum — cut 2
- side back peplum — cut 2
- center front waistband — cut 2
- side front waistband — cut 2
- center back waistband — cut 2
- side back waistband — cut 2
- front facing — cut 2

Additionally, cut square interfacing pieces with 2 cm (3/4") sides to reinforce the grommet sections on the main fabric.

IMPORTANT! Don't forget to transfer all pattern markings and notches onto the fabric.

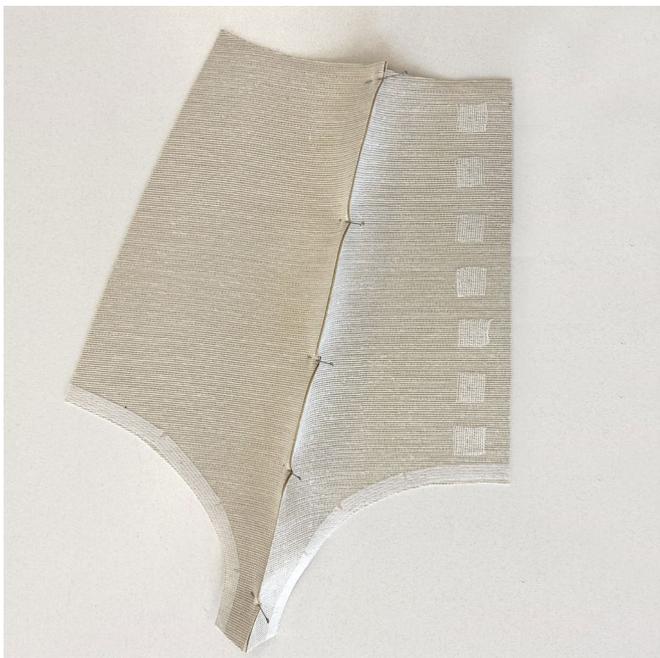

Place the center and side front peplum pieces right sides together, align the princess seam edges. Match the notches and pin. Machine-stitch, backstitching at the beginning and end of the seam.

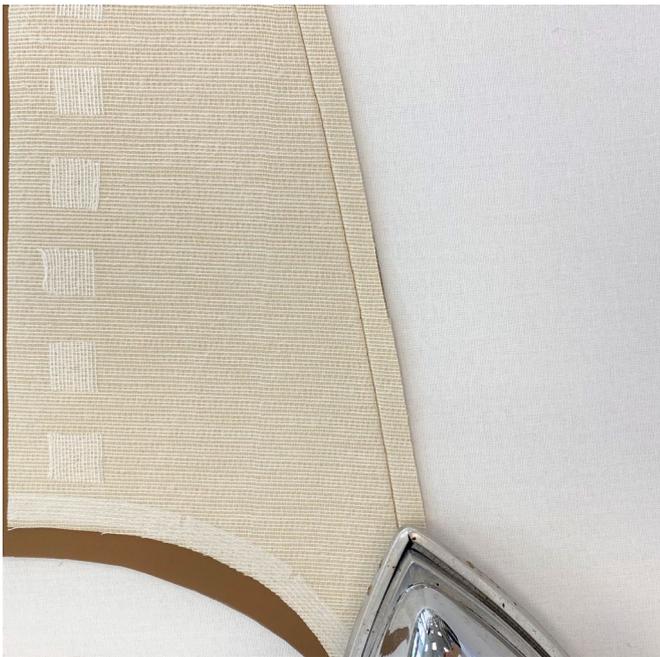

Press the seam flat.



Place the paper-backed fusible web tape under the seam allowances and fuse.