

FROM THE FOUNDER OF THE #VIKISEWS BRAND




Back in 2016, when I was working on my first set of sewing instructions, I was trying to write them in such a way that even a complete beginner could easily understand and use them to create their very first garment. These instructions laid the foundation for the Vikisews brand, its vision and its mission. I wanted to create modern patterns with the utmost detailed and clear instructions.

Now, with each new collection we are constantly improving our instructions, amending them and adding more relevant details. By the time the final product reaches you, our drafters, correctors, and editors would have spent weeks perfecting every word and every photograph. If you compile a few of our instructions together, you will get a sewing manual that will assist you in sewing all kinds of garments at any difficulty level.

And I would be very happy if these instructions helped you to turn your hobby into a lifelong passion... Enjoy the process! Create your ultimate dream wardrobe! Wear your garments proudly for years to come!

If you have any questions, please contact us at info@vikisews.com - we are always there to help.

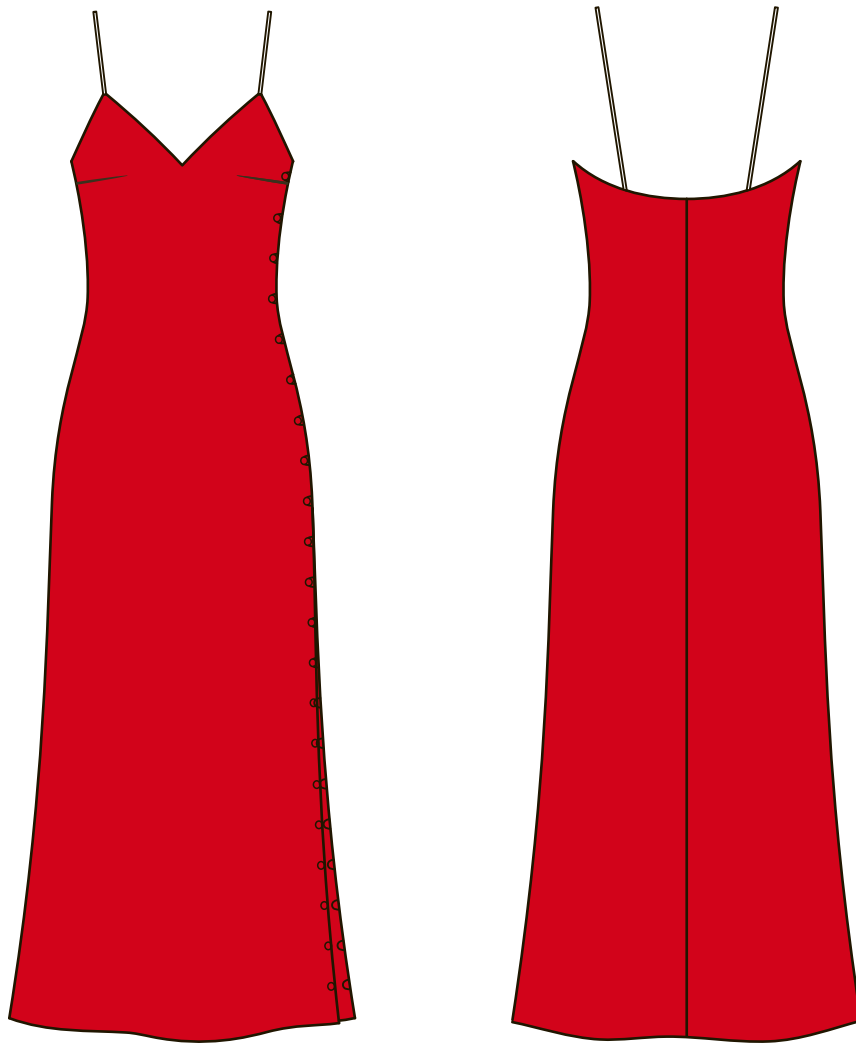

LACEY PATTERN DESCRIPTION

Lacey is a close-fitting slip dress with an accentuated waist. The dress is bias-cut and is additionally fitted with a center back seam. There are bust darts on the front. The dress is self-lined, sleeveless, and has spaghetti straps. There are decorative buttons and button loops along the entire length of the left side seam. The left side seam ends in a slit that's also trimmed with buttons and button loops that can be used to adjust the height of the slit. Lacey is midi length.



IMPORTANT!

The contents of this pattern are copyright protected and belong exclusively to Vikisews. You may use Vikisews patterns for personal use. It is prohibited to share Vikisews patterns and instructions with third parties, as well as to publish patterns and instructions online for public access. **Non-compliance with the mentioned rules is a violation of the US copyright law and may result in civil liability and criminal prosecution.**

You may use Vikisews patterns for commercial use, to sew custom-made garments and/or create fashion collections, on the condition that the patterns are solely used in a manufacturing setting and are not further shared with individuals.

TOTAL EASE ALLOWANCE

The garment is bias-cut, so the ease measurements are estimated.

	Bust ease	Waistline ease	Hipline ease
cm	1.1–1.6	11	8
inches	3/8–5/8	4 3/8	3 1/8

GARMENT LENGTH

Height, cm	Garment length at center back, cm	Height, ft	Garment length at center back, in
1 (154–160)	78.6–82.3	1 (5'1"–5'3")	31–32 3/8
2 (162–168)	81.6–85.3	2 (5'4"–5'6")	32 1/8–33 5/8
3 (170–176)	84.6–88.3	3 (5'7"–5'9")	33 1/4–34 3/4
4 (178–184)	87.7–91.4	4 (5'10"–6'1")	34 1/2–36

SUGGESTED FABRIC

To sew this dress, choose dress-weight fabrics with the following properties:

- medium-weight, pliable, breathable, soft, non-stretch or low-stretch, opaque
- the fiber content can include natural fibers (silk), artificial fibers (viscose), blends (silk + polyester, polyester + viscose, etc.), and synthetics (polyester, polyester + elastane)
- the following fabrics are recommended: silk, artificial silk, dress-weight viscose, charmeuse.

Attention! We do not recommend stretchy knit materials (jersey fabrics), or lightweight sheer fabrics (chiffon, organza, stretch lace).

We recommend using the same fabric for the lining. This is very important for bias-cut garments. Even the slightest difference in the properties of the outer fabric and lining can cause distortion in the final garment.

The dress in the photos is made of charmeuse. The fabric is medium-weight, pliable, soft, non-stretch. The fabric content is 100% polyester.

PATTERN PIECES LIST

1. From main fabric:

- front – cut 1 + 1 lining
- back – cut 2 + 2 lining
- strap – cut 2
- rouleau loop – cut 1

***IMPORTANT!** Don't forget to transfer all the notches from the pattern to your fabric. This is especially important for a bias-cut garment.*

SEAM ALLOWANCES


Pattern pieces include the following seam allowances:

- all edges – 1cm (3/8")


Take this into account when laying out pattern pieces on the fabric.

CUTTING LAYOUT

Main fabric, 140cm (55") wide, cut on a single layer, for all sizes in all heights, without print or nap direction

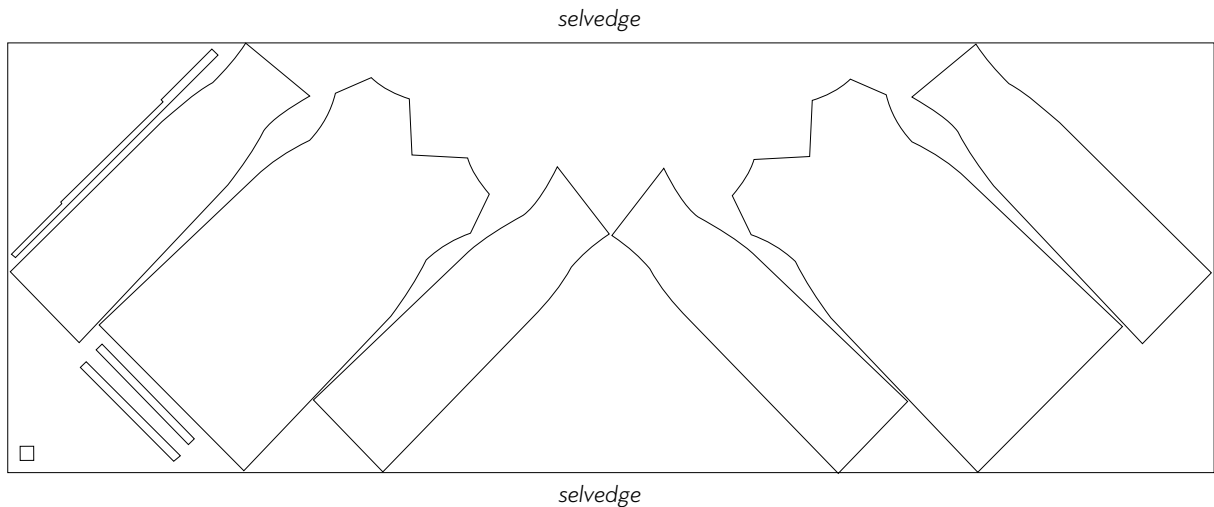

READY? LET'S GET SEWING!

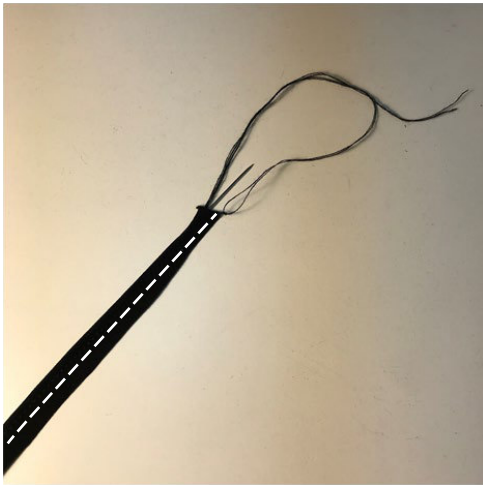

Using a 2–2.5mm stitch length, machine-stitch at 2.5–3mm (1/8") from the fold. Backstitch at the beginning and end of the seam.

To make turning the loop easier, start stitching at an angle creating a funnel. Leave long thread tails at the beginning of the seam, thread them into a needle and then thread the needle through the loop to turn it to the right side.



Spray the loop with water, stretch it, and secure the ends with pins on the ironing board. The more you stretch the loop, the thinner it will be.

Press the loop flat along the entire length.



Cut the rouleau loop into 21 pieces according to the pattern markings.



Following the notches, hand-baste the loops to the left side seam of the outer back piece. The right side of the loops should be facing the right side of the back piece. Baste carefully, making sure not to gather the fabric.