

FROM THE FOUNDER OF THE #VIKISEWS BRAND



Back in 2016, when I was working on my first set of sewing instructions, I was trying to write them in such a way that even a complete beginner could easily understand and use them to create their very first garment. These instructions laid the foundation for the Vikisews brand, its vision and its mission. I wanted to create modern patterns with the utmost detailed and clear instructions.

Now, with each new collection we are constantly improving our instructions, amending them and adding more relevant details. By the time the final product reaches you, our drafters, correctors, and editors would have spent weeks perfecting every word and every photograph. If you compile a few of our instructions together, you will get a sewing manual that will assist you in sewing all kinds of garments at any difficulty level.

And I would be very happy if these instructions helped you to turn your hobby into a lifelong passion... Enjoy the process! Create your ultimate dream wardrobe! Wear your garments proudly for years to come!

If you have any questions, please contact us at info@vikisews.com - we are always there to help.



TIFFANY PATTERN DESCRIPTION

Tiffany is a semi-fitted bias-cut dress with an accentuated waist. The front features bust darts that have been transferred to the armscye, and the back has waist darts. The rounded neckline is finished with a facing and features a slit opening at the back that closes with a loop and button. Tiffany has a long set-in sleeve and a separate belt with a buckle and belt loop. Tiffany is midi length.



IMPORTANT!

The contents of this pattern are copyright protected and belong exclusively to Vikisews. You may use Vikisews patterns for personal use. It is prohibited to share Vikisews patterns and instructions with third parties, as well as to publish patterns and instructions online for public access. **Non-compliance with the mentioned rules is a violation of the US copyright law and may result in civil liability and criminal prosecution.**

You may use Vikisews patterns for commercial use, to sew custom-made garments and/or create fashion collections, on the condition that the patterns are solely used in a manufacturing setting and are not further shared with individuals.

TOTAL EASE ALLOWANCE

	Bust ease	Waistline ease	Hipline ease	Upper arm ease
Cm	4.9–5.3	13–13.5	9.5	4
Inches	1 7/8–2 1/8	5 1/8–5 3/8	3 3/4	1 5/8

GARMENT LENGTH, SLEEVE LENGTH

Height, cm	Back length, cm	Sleeve length, cm	Height, ft	Back length, in	Sleeve length, in
1 (154-160)	110	56.5	1 (5'1"–5'3")	43 1/4	22 1/4
2 (162-168)	114	58.5	2 (5'4"–5'6")	44 7/8	23
3 (170-176)	118	60.5	3 (5'7"–5'9")	46 1/2	23 7/8
4 (178-184)	122	62.5	4 (5'10"–6'1")	48	24 5/8

SUGGESTED FABRIC

To sew this dress, choose woven fabrics with the following properties:

- Medium weight, soft, presses well, non-stretch or with very little stretch, opaque
- The fiber content can include natural fibers (wool, silk), artificial, blends (wool + polyester, wool + elastane, silk + polyester, silk + elastane, etc.), and synthetic (polyester, polyester + elastane)
- The following fabrics are recommended: dress-weight wool, natural and artificial silk, viscose poplin, crepe, atlas

Attention! We do not recommend stretchy knit materials or lightweight fabrics.

The dress in the photo is made of crepe fabric. This fabric is medium weight, soft and has very little stretch. The fiber content is a blend of silk, polyester and elastane.

TOOLS AND EQUIPMENT

- Sewing machine for construction
- Overlocker for finishing raw edges. This may be replaced with a stretch overlock stitch or a zigzag stitch on the sewing machine (overlock or zigzag stitch width 2-3mm, stitch length 2.5mm)
- Stitch-in-the-ditch foot for your sewing machine (optional)

PATTERN PIECES LIST

1. From main fabric:

- Front – cut 1
- Back – cut 1
- Sleeve – cut 2
- Front neck facing – cut 1
- Back neck facing – cut 1
- Belt – cut 1
- Button loop – cut 1
- Belt loop – cut 1

2. From interfacing:

- Front neck facing – cut 1
- Back neck facing – cut 1
- Belt – cut 1


***IMPORTANT!** Don't forget to transfer all pattern markings and notches onto the fabric.*

SEAM ALLOWANCES

Pattern pieces include the following seam allowances:

- Sleeve hems — 2cm (3/4")
- Garment hem — 2cm (3/4")
- All other seams — 1cm (3/8")

Take this into account when laying out pattern pieces on the fabric.

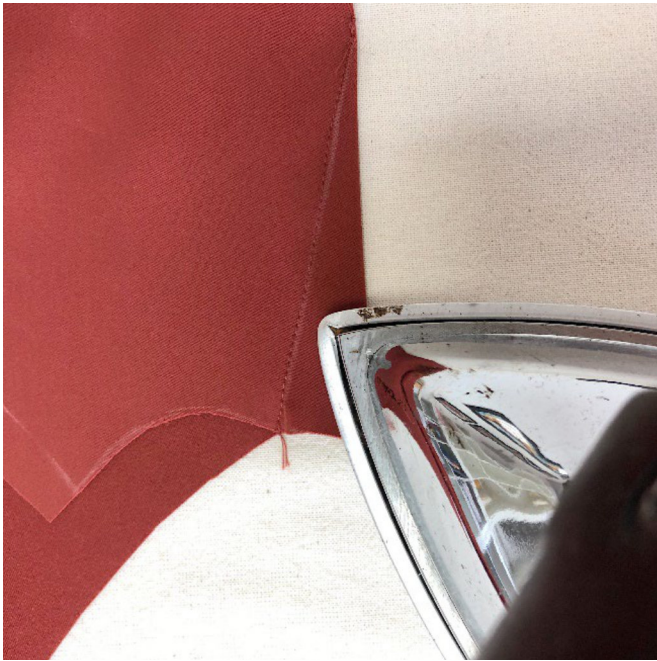

Press the dart flat (as sewn).



Now press the dart down towards the armhole. Use a piece of cardboard underneath the dart when pressing, in order to avoid leaving imprints on the right side.



On the wrong side of the back piece, pin, baste and stitch the waist darts. Tie knots at the beginning and end of the stitching lines, and hide thread tails in the dart bulk.