

FROM THE FOUNDER OF THE #VIKISEWS BRAND



Back in 2016, when I was working on my first set of sewing instructions, I was trying to write them in such a way that even a complete beginner could easily understand and use them to create their very first garment. These instructions laid the foundation for the Vikisews brand, its vision and its mission. I wanted to create modern patterns with the most detailed and clear instructions.

Now, with each new collection we are constantly improving our instructions, amending them and adding more relevant details. By the time the final product reaches you, our drafters, correctors, and editors would have spent weeks perfecting every word and every photograph. If you compile a few of our instructions together, you will get a sewing manual that will assist you in sewing all kinds of garments at any difficulty level.


And I would be very happy if these instructions helped you to turn your hobby into a lifelong passion... Enjoy the process! Create your ultimate dream wardrobe! Wear your garments proudly for years to come!

If you have any questions, please contact us at info@vikisews.com - we are always there to help.



AGNIA PATTERN DESCRIPTION

Agnia is a straight skirt, with moderate volume and slightly tapered at the hem. The skirt features facings at the front and back, and does not have a waistband. The front and back of the skirt are fitted with waist darts. The front features a princess seam and a vent. The skirt fastens with a zipper placed in the center back seam. It is fully lined. Agnia is above-knee length.

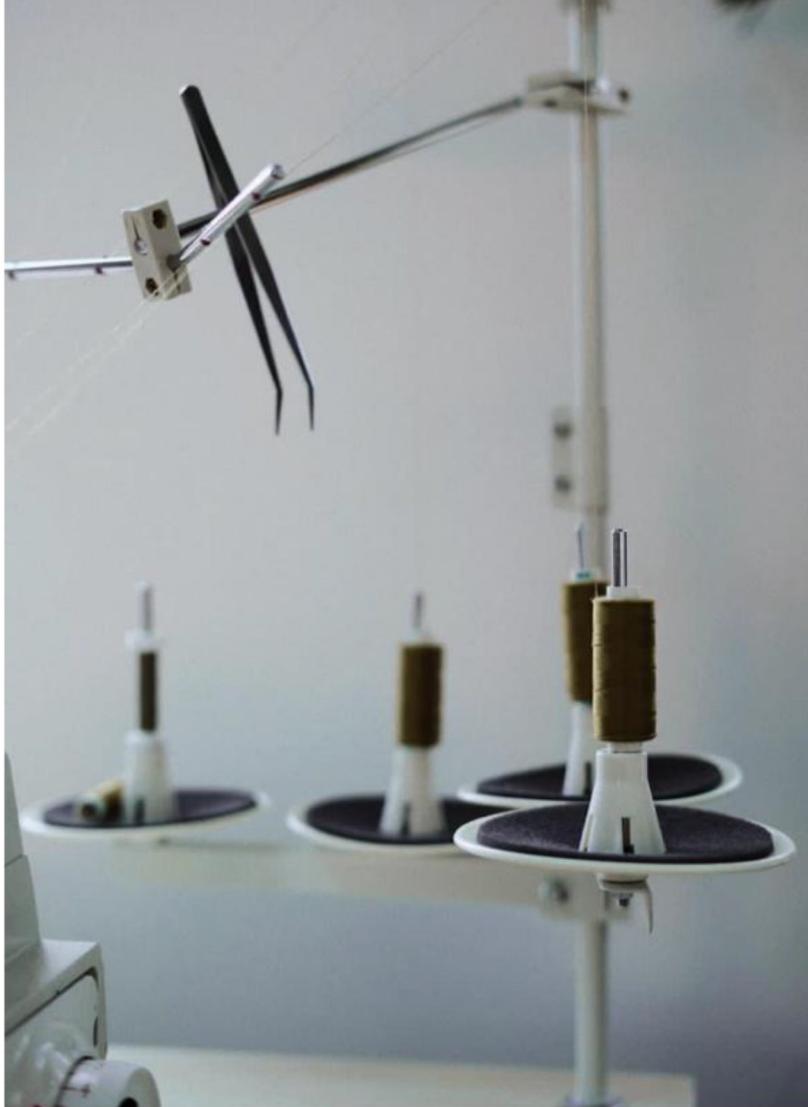

IMPORTANT!

The contents of this pattern are copyright protected and belong exclusively to Vikisews. You may use Vikisews patterns for personal use. It is prohibited to share Vikisews patterns and instructions with third parties, as well as to publish patterns and instructions online for public access. **Non-compliance with the mentioned rules is a violation of the US copyright law and may result in civil liability and criminal prosecution.**

You may use Vikisews patterns for commercial use, to sew custom-made garments and/or create fashion collections, on the condition that the patterns are solely used in a manufacturing setting and are not further shared with individuals.

TOTAL EASE ALLOWANCE

Waistline ease, cm	Hipline ease, cm	Waistline ease, in	Hipline ease, in
3.0	3.0	1 1/8	1 1/8

GARMENT LENGTH

Height, cm	Garment length, cm	Height, ft	Garment length, in
1 (154-160)	44	1 (5'1" - 5'3")	17 1/4
2 (162-168)	47	2 (5'4" - 5'6")	18 1/2
3 (170-176)	50	3 (5'7" - 5'9")	19 5/8
4 (178-184)	53	4 (5'10" - 6'1")	20 7/8

SUGGESTED FABRIC

To sew this skirt, choose suiting fabrics with the following properties:

- medium-weight, structured, soft, non-stretch or with little stretch, opaque
- the fabric content can include natural (wool, cotton, linen), artificial (viscose), blends (wool + silk, wool + polyester, cotton + viscose, etc.), and synthetic fibers (polyester, polyester + elastane)
- the following fabrics are recommended: wool suiting, gabardine, jacquard, heavy weight denim, corduroy, faux leather, suede.

Attention! We do not recommend very stretchy knit materials (jersey fabric) and lightweight sheer fabrics (chiffon, organza, stretch lace).

For the lining, we recommend fabrics which include artificial fibers (viscose), blends (viscose + elastane, viscose + polyester), or synthetic fibers (polyester, polyester + elastane).

The garment in the photo is made in faux leather. This fabric is medium-weight, pliable, soft, and has very little stretch. The fabric content is a blend of polyurethane and polyester. The lining is 100% viscose.

TOOLS AND EQUIPMENT

- sewing machine for construction
- zipper foot for the sewing machine
- walking or ultra-glide (Teflon) foot.

PATTERN PIECES LIST

1. From main fabric:

- back - cut 2
- right front - cut 1
- left front - cut 1
- back facing - cut 2
- front facing - cut 1 on fold
- placket - cut 1.

2. From lining:

- back lining - cut 2
- right front lining - cut 1
- left front lining - cut 1
- placket - cut 1.

Attention! All pattern pieces should be cut-out on the right side of the fabric.

IMPORTANT! *Don't forget to transfer all pattern markings and notches onto the fabric.*

3. From interfacing:

- 2 strips, 2 cm (3/4") wide and 23 cm (9") long, to interface the seam allowance along the center back seam where the zipper will be inserted
- 1 strip, 4.5 cm (1 3/4") wide and 25 cm (9 7/8") long, to interface the vent extension seam allowance on the right front piece
- 2 squares 3x3 cm (1 1/8" x 1 1/8 ") in size, to interface the segment of the seam allowance along the center back seam (where the zipper will be inserted) on the back lining pieces
- 1 strip, 3 cm (1 1/8") wide and 4 cm (1 1/2") long, to interface the area on the vent's seam allowance on the right front lining piece

The grainline of the strips should be parallel to the longer edge of the interfacing material (i.e. along the selvedge of the interfacing).

SEAM ALLOWANCES

All pattern pieces include seam allowances as follows:

- garment hem allowance – 4 cm (1 5/8")
- all other seams – 1 cm (3/8").

Take this into account when laying out pattern pieces on the fabric.



Press the seam flat, and then clip diagonally on the left front piece at 1 mm from the stitching line.



Using a pressing cloth, press the seam allowances open while inserting double-sided fusible tape underneath them.



On the left and right front pieces, join the seam allowances of the vent extension, right sides together. Align along the oblique edges. Baste, and then machine using a 5 mm (3/16") seam allowance. Break the stitching at 1 cm (3/8") from the seam allowance of the lining-to-garment stitching line.