

# FROM THE FOUNDER OF THE #VIKISEWS BRAND

---



Back in 2016, when I was working on my first set of sewing instructions, I was trying to write them in such a way that even a complete beginner could easily understand and use them to create their very first garment. These instructions laid the foundation for the Vikisews brand, its vision and its mission. I wanted to create modern patterns with the most detailed and clear instructions.

Now, with each new collection we are constantly improving our instructions, amending them and adding more relevant details. By the time the final product reaches you, our drafters, correctors, and editors would have spent weeks perfecting every word and every photograph. If you compile a few of our instructions together, you will get a sewing manual that will assist you in sewing all kinds of garments at any difficulty level.

And I would be very happy if these instructions helped you to turn your hobby into a lifelong passion... Enjoy the process! Create your ultimate dream wardrobe! Wear your garments proudly for years to come!

If you have any questions, please contact us at [info@vikisews.com](mailto:info@vikisews.com) - we are always there to help.



## GEORGIE PATTERN DESCRIPTION

---

Georgie is a fitted cropped blouse. The center front features a cutout finished with drawstring casings and gathered with ties. The front hem has an elastic casing. The blouse has a split back. The two back parts are joined with long ties forming a bow. The blouse has a deep V-neckline on the front and back. The short set-in puffed sleeves are above elbow-length. The sleeves are gathered at the cap and have an elastic casing at the hem.



## FOR YOUR CONSIDERATION!

---

The contents of this pattern are copyright protected and belong exclusively to Vikisews. You may use Vikisews patterns for personal use. It is prohibited to share Vikisews patterns and instructions with third parties, as well as to publish patterns and instructions online for public access. **Non-compliance with the mentioned rules is a violation of the US copyright law and may result in civil liability and criminal prosecution.**

You may use Vikisews patterns for commercial use, to sew custom-made garments and/or create fashion collections, on the condition that the patterns are solely used in a manufacturing setting and are not further shared with individuals.

## TOTAL EASE ALLOWANCE

---

Bust ease, cm	Upper arm ease, cm
0	48.1-59.1

## SLEEVE LENGTH

---

Height, cm	Sleeve length, cm
1 (154-160)	37.5
2 (162-168)	39-39.1
3 (170-176)	40.4-40.5
4 (178-184)	41.9-42

## SUGGESTED FABRIC

---

To sew this blouse, choose woven fabrics with the following properties:

- light to medium weight, low drape, non-stretch
- the fiber content can include natural fibers (silk, cotton, linen), artificial (acetate, viscose), blends (cotton + viscose, etc) and synthetics (polyester)
- the following fabrics are recommended: sateen, poplin, linen, broderie, opaque cotton shirting, viscose, batiste.

For the lining, the following fabrics are recommended: cotton shirting, poplin, batiste.

The blouse in the photos is made from 100% linen. The fabric is medium-weight, without stretch. The lining is made from 100% cotton batiste.

# TOOLS AND EQUIPMENT

---

- sewing machine for construction
- overlocker for finishing raw edges. This may be replaced with a stretch overlock stitch or a zigzag stitch on the sewing machine (overlock or zigzag stitch width 2-3mm, stitch length 2.5mm)
- edgestitch foot for the sewing machine (optional)
- loop turner
- bodkin / elastic threader
- buttonhole foot for the sewing machine

# PATTERN PIECES LIST

---

## 1. From main fabric:

- front - cut 2
- back - cut 2
- sleeve - cut 2
- front tie - cut 2
- back tie - cut 2

## 2. From lining:

- front - cut 2
- back - cut 2

Also from the lining fabric, cut bias binding to finish armscye seams (optional).

***IMPORTANT!** Don't forget to transfer all the notches from the pattern to your fabric.*


# SEAM ALLOWANCES

---

Pattern pieces include the following seam allowances:

- all edges - 1cm

Take this into account when laying out pattern pieces on the fabric.

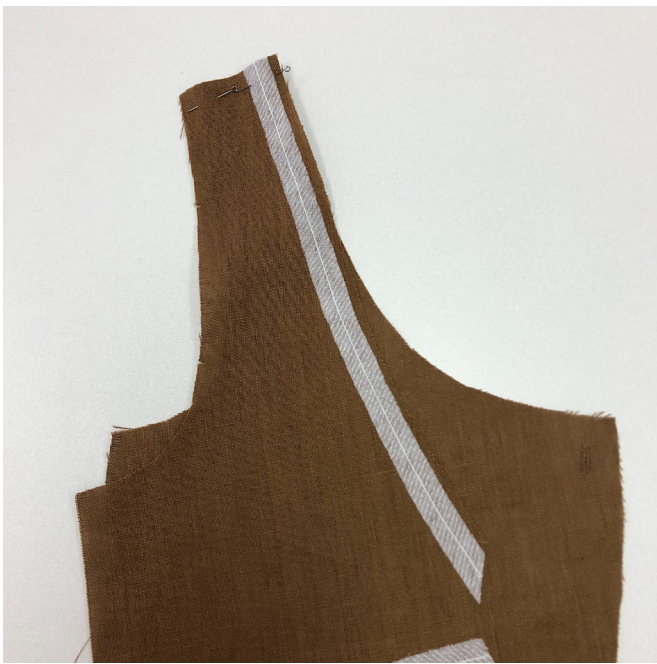

Place the front and back lining pieces right sides together, aligning the shoulder seams. Pin the shoulder seams, baste and stitch on the sewing machine. Backstitch at the beginning and end of the seam.



Press the seam flat.



Press the seam open.