

FROM THE FOUNDER OF THE #VIKISEWS BRAND



Back in 2016, when I was working on my first set of sewing instructions, I was trying to write them in such a way that even a complete beginner could easily understand and use them to create their very first garment. These instructions laid the foundation for the Vikisews brand, its vision and its mission. I wanted to create modern patterns with the utmost detailed and clear instructions.

Now, with each new collection we are constantly improving our instructions, amending them and adding more relevant details. By the time the final product reaches you, our drafters, correctors, and editors would have spent weeks perfecting every word and every photograph. If you compile a few of our instructions together, you will get a sewing manual that will assist you in sewing all kinds of garments at any difficulty level.

And I would be very happy if these instructions helped you to turn your hobby into a lifelong passion... Enjoy the process! Create your ultimate dream wardrobe! Wear your garments proudly for years to come!

If you have any questions, please contact us at info@vikisews.com — we are always there to help.



BAILEY PATTERN DESCRIPTION

Bailey is a semi-fitted jumpsuit with a straight silhouette. The front features zipper pockets at the top and bottom, while the back has a yoke and center seam. The jumpsuit has an elasticated casing at the waist, a stand collar, and a front zipper fastening. The set-in sleeves are long, made up of two pieces, and gathered at the bottom with elastics. Bailey is below-ankle length.



IMPORTANT!

The contents of this pattern are copyright protected and belong exclusively to Vikisews. You may use Vikisews patterns for personal use. It is prohibited to share Vikisews patterns and instructions with third parties, as well as to publish patterns and instructions online for public access. **Non-compliance with the mentioned rules is a violation of the US copyright law and may result in civil liability and criminal prosecution.**

You may use Vikisews patterns for commercial use, to sew custom-made garments and/or create fashion collections, on the condition that the patterns are solely used in a manufacturing setting and are not further shared with individuals.

TOTAL EASE ALLOWANCE

	Bust ease	Waistline ease	Hipline ease (estimated)	Upper arm ease
cm	24.1–24.2	31.5–31.6	9.7–10	17.9–18
inches	9 1/2	12 3/8–12 1/2	3 7/8	7–7 1/8

GARMENT LENGTH, SLEEVE LENGTH

Height, cm	Side seam length from waist down, cm	Sleeve length including shoulder width, cm
1 (154–160)	105.1–105.2	72.5–77.5
2 (162–168)	109.1–109.3	74.5–79.5
3 (170–176)	113.1–113.2	76.5–81.5
4 (178–184)	117.1–117.2	78.5–83.5

Height, ft	Side seam length from waist down, in	Sleeve length including shoulder width, in
1 (5'1"–5'3")	41 3/8	28 1/2–30 1/2
2 (5'4"–5'6")	43	29 3/8–31 1/4
3 (5'7"–5'9")	44 1/2–44 5/8	30 1/8–32 1/8
4 (5'10"–6'1")	46 1/8	30 7/8–32 7/8

FINISHED HEM WIDTH FOR ALL HEIGHTS

Size	34	36	38	40	42	44	46	48	50	52
cm	26.2	26.9	27.5	28.1	28.8	29.5	30.1	30.8	31.4	32
inches	10 3/8	10 5/8	10 7/8	11 1/8	11 3/8	11 5/8	11 7/8	12 1/8	12 3/8	12 5/8

PATTERN PIECES LIST

1. From main fabric:

- front — cut 2
- back — cut 2
- front sleeve — cut 2
- back sleeve — cut 2
- back yoke — cut 1 on fold
- stand collar — cut 2 on fold
- front facing — cut 2
- chest pocket lining — cut 2
- side pocket lining — cut 2
- chest pocket facing — cut 2
- side pocket facing — cut 2
- back casing — cut 1 on fold
- front casing — cut 2

2. From additional fabric (jersey):

- chest pocket lining — cut 2
- side pocket lining — cut 2

3. From interfacing:

- chest pocket facing — cut 2
- side pocket facing — cut 2

IMPORTANT! Don't forget to transfer all pattern markings and notches onto the fabric.

SEAM ALLOWANCES


All pattern pieces include seam allowances as follows:

- garment hem allowance — 3 cm (1 1/8")
- all other edges — 1 cm (3/8")

Take this into account when laying out pattern pieces on the fabric.

CUTTING LAYOUT

Main fabric, 160 cm (63") wide, with a directional print/nap, cut on fold, for size 34 in all heights

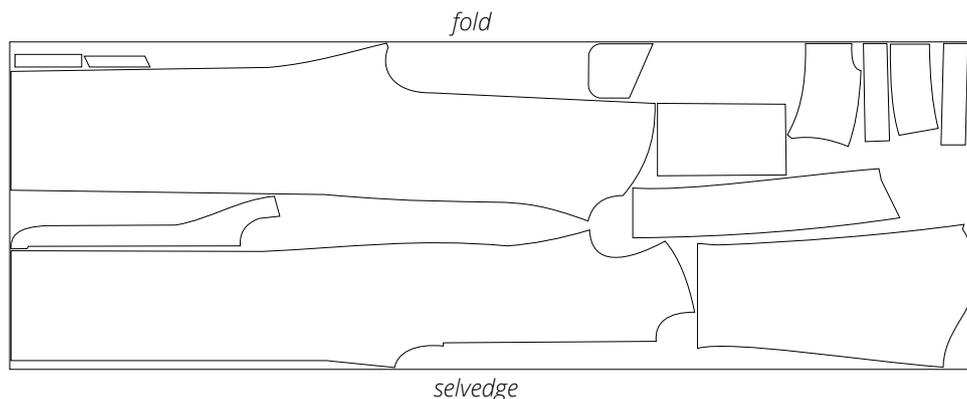



Machine-stitch along the bounding box markings, backstitching at the end of the seam.



Remove the basting stitches, press the seams.



Chalk-mark the cutting lines inside the bounding boxes of the chest and side pockets. Cut the pockets open along the marked lines.

Precision is very important when cutting a pocket open. When cutting diagonally into the corners, stop 1 mm away from the stitching line.