

FROM THE FOUNDER OF THE #VIKISEWS BRAND



Back in 2016, when I was working on my first set of sewing instructions, I was trying to write them in such a way that even a complete beginner could easily understand and use them to create their very first garment. These instructions laid the foundation for the Vikisews brand, its vision and its mission. I wanted to create modern patterns with the utmost detailed and clear instructions.

Now, with each new collection we are constantly improving our instructions, amending them and adding more relevant details. By the time the final product reaches you, our drafters, correctors, and editors would have spent weeks perfecting every word and every photograph. If you compile a few of our instructions together, you will get a sewing manual that will assist you in sewing all kinds of garments at any difficulty level.

And I would be very happy if these instructions helped you to turn your hobby into a lifelong passion... Enjoy the process! Create your ultimate dream wardrobe! Wear your garments proudly for years to come!

If you have any questions, please contact us at info@vikisews.com — we are always there to help.



MISSANDEI PATTERN DESCRIPTION

Missandei is a semi-fitted dress with an accentuated waist due to the waist seam. The bodice waist is pleated at the front and gathered at the back. There is a back yoke with an overlapped slit underneath, dropped shoulders, and long shirt sleeves pleated at the bottom. The stand collar transitions into a scarf. The bias-cut skirt of the dress is gathered at the top and has design lines. Missandei closes with an invisible zipper in the center back seam of the skirt and is above-ankle length.



IMPORTANT!

The contents of this pattern are copyright protected and belong exclusively to Vikisews. You may use Vikisews patterns for personal use. It is prohibited to share Vikisews patterns and instructions with third parties, as well as to publish patterns and instructions online for public access. **Non-compliance with the mentioned rules is a violation of the US copyright law and may result in civil liability and criminal prosecution.**

You may use Vikisews patterns for commercial use, to sew custom-made garments and/or create fashion collections, on the condition that the patterns are solely used in a manufacturing setting and are not further shared with individuals.

TOTAL EASE ALLOWANCE

	Bust ease	Waistline ease	Hipline ease	Upper arm ease
cm	7.1–11.7	1–2.7	6–7.2	6.9–10.9
inches	2 ³ / ₄ –4 ⁵ / ₈	³ / ₈ –1 ¹ / ₈	2 ³ / ₈ –2 ⁷ / ₈	2 ³ / ₄ –4 ¹ / ₄

GARMENT LENGTH, SLEEVE LENGTH

Height, cm	Garment length, cm	Sleeve length, cm
1 (154–160)	88.3–87.1	75.2–77.3
2 (162–168)	91.4–90.4	77.2–79.3
3 (170–176)	94.5–93.5	79.2–81.3
4 (178–184)	97.7–96.8	81.2–83.4

Height, ft	Garment length, in	Sleeve length, in
1 (5'1"–5'3")	34 ³ / ₄ –34 ¹ / ₄	29 ⁵ / ₈ –30 ³ / ₈
2 (5'4"–5'6")	36–35 ⁵ / ₈	30 ³ / ₈ –31 ¹ / ₄
3 (5'7"–5'9")	37 ¹ / ₄ –36 ³ / ₄	31 ¹ / ₈ –32
4 (5'10"–6'1")	38 ¹ / ₂ –38 ¹ / ₈	32–32 ⁷ / ₈

SUGGESTED FABRIC

To sew this dress, choose medium-weight, pliable, soft, non-stretch or low-stretch opaque dress fabrics made of natural, artificial, blended, or synthetic fibers.

The following fabrics are recommended: satin, dress viscose, crepe de chine, silk, artificial silk, chiffon.

Attention! We do not recommend stretchy knit fabrics or heavy suiting fabrics.

The dress in the photo is made of crepe in two colors. The fabric is medium weight, pliable, soft, and low-stretch. The fiber content is 98% polyester + 2% elastane. Fabric weight is 215 g/m².

FABRIC AND NOTIONS REQUIREMENTS

1. Main fabric, 140 cm wide, with a directional print/nap (all pieces cut from the same fabric), in meters:

Height, cm	Size							
	34-36	38	40	42-44	46	48	50	52
1 (154-160)	2.95	3	3.15	3.25	3.4	3.45	3.45	3.55
2 (162-168)	3	3.05	3.25	3.3	3.4	3.45	3.5	3.6
3 (170-176)	3.05	3.1	3.35	3.35	3.5	3.55	3.6	3.65
4 (178-184)	3.1	3.15	3.4	3.45	3.55	3.6	3.65	3.75

Main fabric, 55" wide, with a directional print/nap (all pieces cut from the same fabric), in yards:

Height, ft	Size							
	34-36	38	40	42-44	46	48	50	52
1 (5'1"-5'3")	3 ¼	3 ¼	3 ½	3 ½	3 ¾	3 ¾	3 ¾	3 ⅞
2 (5'4"-5'6")	3 ¼	3 ⅞	3 ½	3 ⅝	3 ¾	3 ¾	3 ⅞	3 ⅞
3 (5'7"-5'9")	3 ⅞	3 ⅞	3 ⅝	3 ⅝	3 ⅞	3 ⅞	3 ⅞	4
4 (5'10"-6'1")	3 ⅞	3 ½	3 ¾	3 ¾	3 ⅞	3 ⅞	4	4 ⅛

Main fabric, 140 cm wide, with a directional print/nap (excluding the front skirt piece), in meters:

Height, cm	Size									
	34	36	38	40	42	44	46	48	50	52
1 (154-160)	2.05	2.1	2.15	2.2	2.2	2.25	2.45	2.5	2.55	2.6
2 (162-168)	2.1	2.15	2.2	2.25	2.3	2.35	2.5	2.55	2.6	2.7
3 (170-176)	2.2	2.25	2.3	2.35	2.35	2.45	2.55	2.6	2.65	2.7
4 (178-184)	2.25	2.3	2.35	2.4	2.45	2.45	2.6	2.65	2.7	2.75

Main fabric, 55" wide, with a directional print/nap (excluding the front skirt piece), in yards:

Height, ft	Size									
	34	36	38	40	42	44	46	48	50	52
1 (5'1"-5'3")	2 ¼	2 ¼	2 ⅞	2 ⅞	2 ⅞	2 ½	2 ⅝	2 ¾	2 ¾	2 ⅞
2 (5'4"-5'6")	2 ¼	2 ⅞	2 ⅞	2 ½	2 ½	2 ⅝	2 ¾	2 ¾	2 ⅞	3
3 (5'7"-5'9")	2 ⅞	2 ½	2 ½	2 ⅝	2 ⅝	2 ⅝	2 ¾	2 ⅞	2 ⅞	3
4 (5'10"-6'1")	2 ½	2 ½	2 ⅝	2 ⅝	2 ⅝	2 ⅝	2 ⅞	2 ⅞	3	3

Main fabric, 140 cm wide, with a directional print/nap (for the front skirt piece in a contrasting color), in meters:

Height, cm	Size			
	34-38	40-44	46-50	52
1 (154-160)	1.15	1.2	1.25	1.3
2 (162-168)	1.2	1.2	1.3	1.3
3 (170-176)	1.2	1.25	1.3	1.3
4 (178-184)	1.2	1.25	1.3	1.3

Main fabric, 55" wide, with a directional print/nap (for the front skirt piece in a contrasting color), in yards:

Height, ft	Size			
	34-38	40-44	46-50	52
1 (5'1"-5'3")	1 ¼	1 ¼	1 ⅜	1 ⅜
2 (5'4"-5'6")	1 ¼	1 ¼	1 ⅜	1 ⅜
3 (5'7"-5'9")	1 ¼	1 ⅜	1 ⅜	1 ⅜
4 (5'10"-6'1")	1 ¼	1 ⅜	1 ⅜	1 ⅜

IMPORTANT! When purchasing fabric, please account for shrinkage and buy 5% more than required.

2. Stitched straight-grain fusible stay tape, 1.5 cm (5/8") wide — 53 cm (21").
3. One invisible zipper, 30 cm (11 3/4") long, for all sizes and heights.
4. Clear elastic, 1 cm (3/8") wide — 73-113 cm (28 3/4-44 1/2"), depending on the size. The exact elastic length is specified in the pattern.
5. One button, 0.5 cm (3/16") in diameter.
6. Matching thread for the main fabric — 5 spools (1 spool for the sewing machine + 4 spools for the overlocker).
7. Matching thread for the contrasting fabric — 5 spools (1 spool for the sewing machine + 4 spools for the overlocker).

TOOLS AND EQUIPMENT

- sewing machine for construction
- overlocker for finishing raw edges. This may be replaced with a stretch overlock stitch or a zigzag stitch on the sewing machine (overlock or zigzag stitch width 2–3 mm, stitch length 2.5 mm)
- invisible zipper foot for the sewing machine

PATTERN PIECES LIST

1. From main fabric (white crepe):

- front bodice — cut 2
- back bodice — cut 2
- back yoke — cut 1
- back skirt — cut 2
- sleeve — cut 2
- scarf collar — cut 2

2. From additional fabric (black crepe):

- front skirt — cut 1

***IMPORTANT!** Don't forget to transfer all pattern markings and notches onto the fabric.*

SEAM ALLOWANCES

All pattern pieces include seam allowances as follows:


- center seam allowance on the back skirt piece — 1.5 cm (5/8")
- all other edges — 1 cm (3/8")

Take this into account when laying out the pattern pieces on the fabric.


CUTTING LAYOUT

Option 1 (all pieces cut from main fabric)


Main fabric, 140 cm (55") wide, with a directional print/nap,
cut on a single layer, for sizes 34–38 in all heights

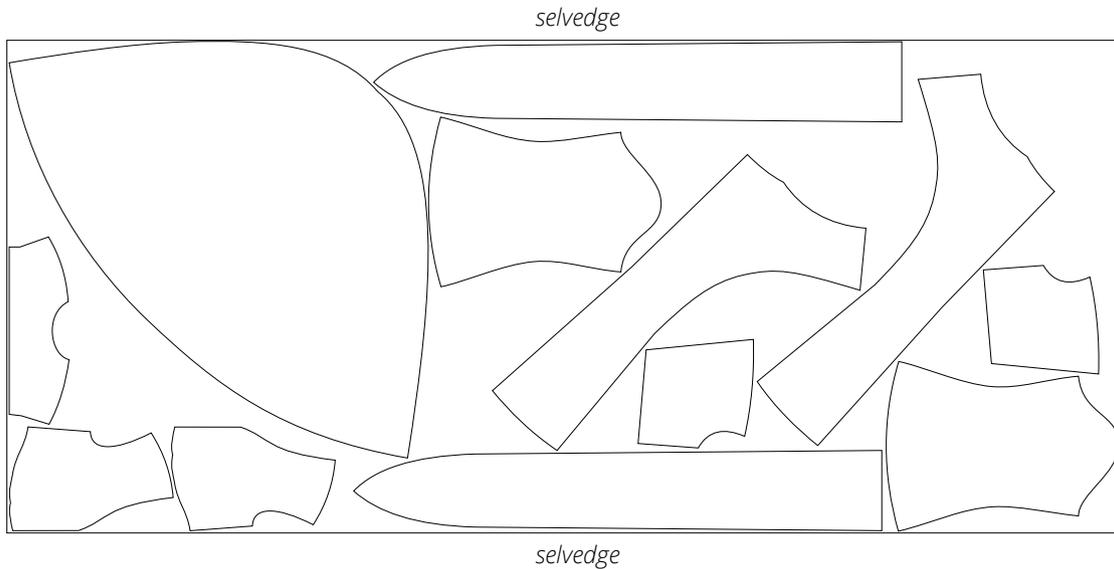

Main fabric, 140 cm (55") wide, with a directional print/nap,
cut on a single layer, for sizes 40–44 in all heights

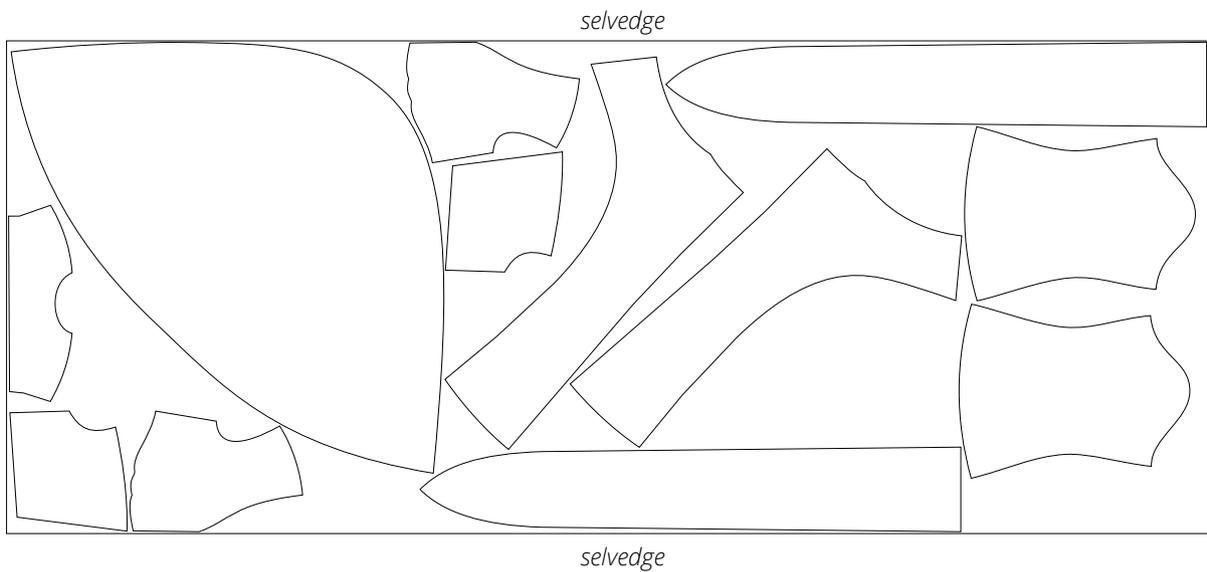


Main fabric, 140 cm (55") wide, with a directional print/nap,
cut on a single layer, for sizes 46-52 in all heights

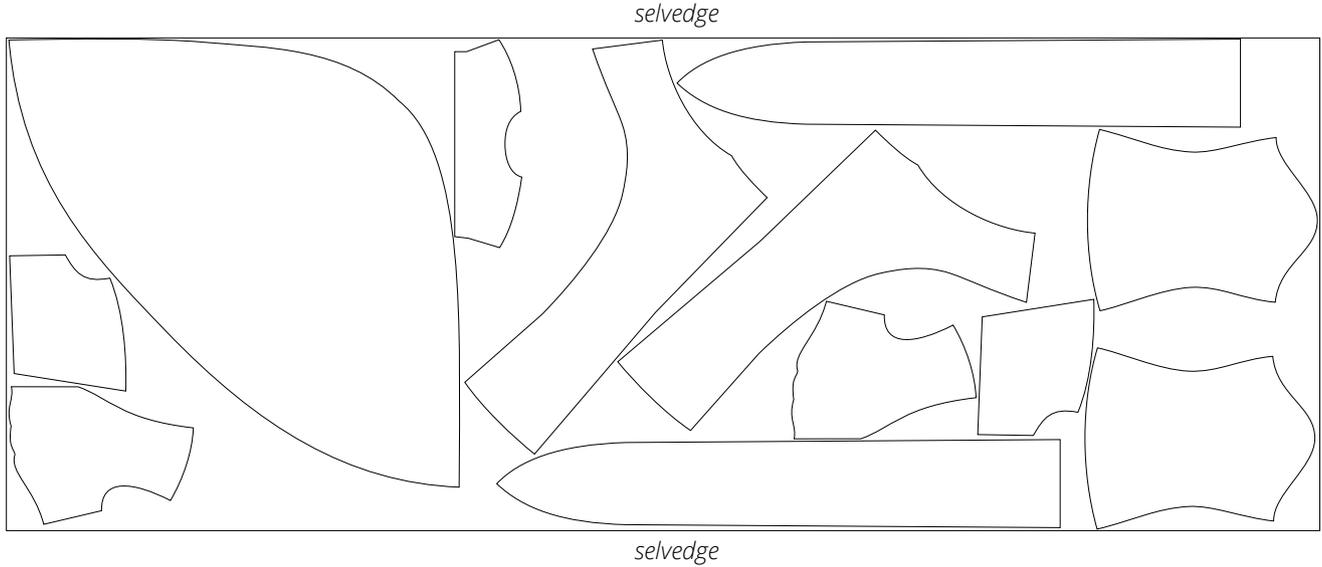


Option 2 (Front skirt cut from additional fabric)


Main fabric, 140 cm (55") wide, with a directional print/nap,
cut on a single layer, for sizes 34-44 in all heights

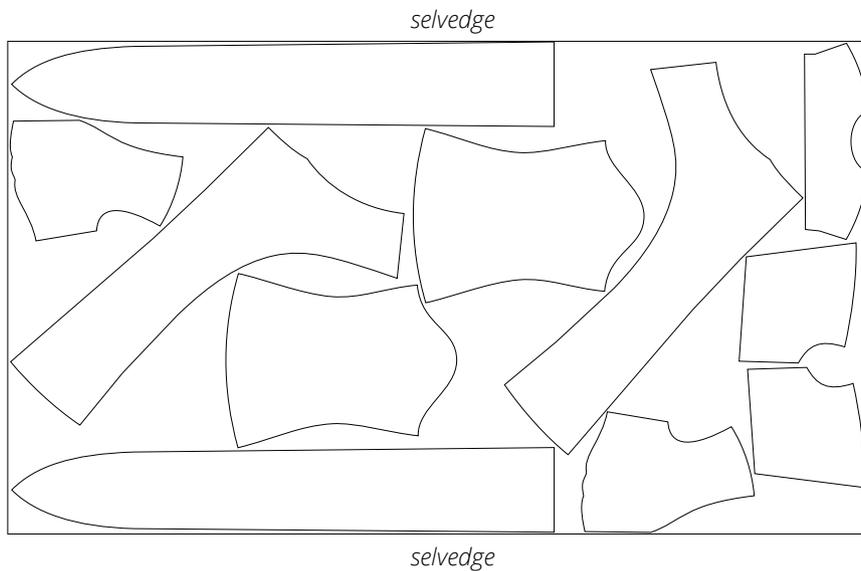


Main fabric, 140 cm (55") wide, with a directional print/nap, cut on a single layer, for sizes 46-52 in all heights

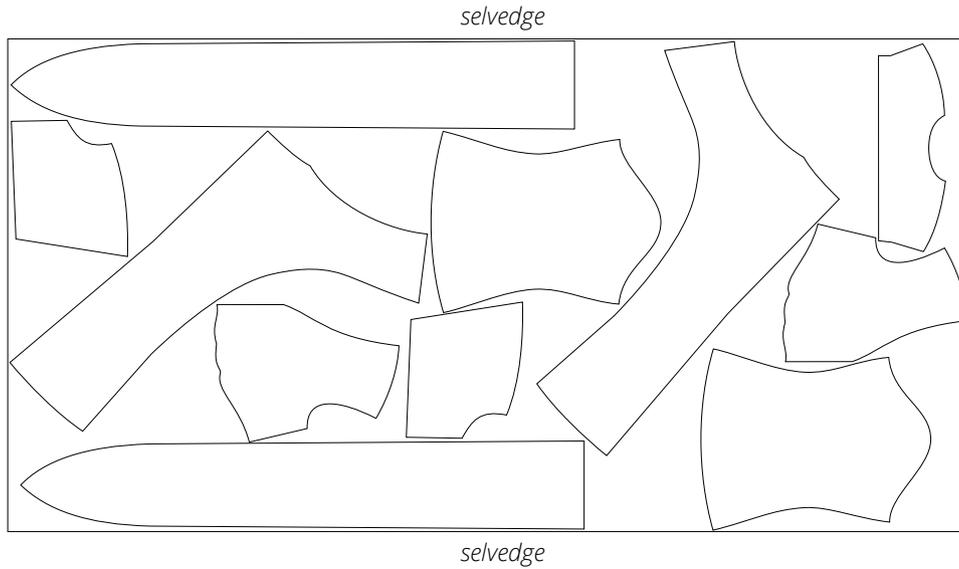

Additional fabric, 140 cm (55") wide, with a directional print/nap, cut on a single layer, for all sizes in all heights

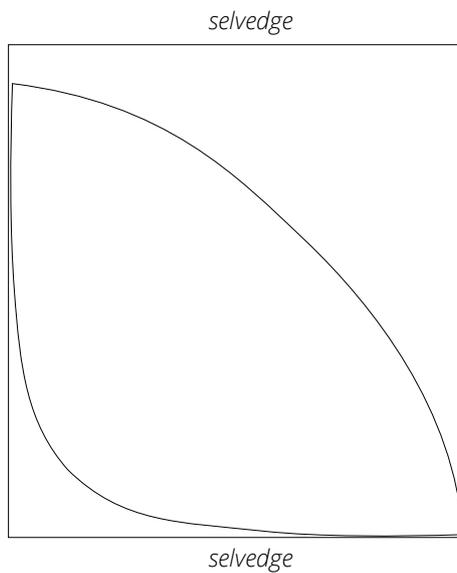

READY? LET'S GET SEWING!

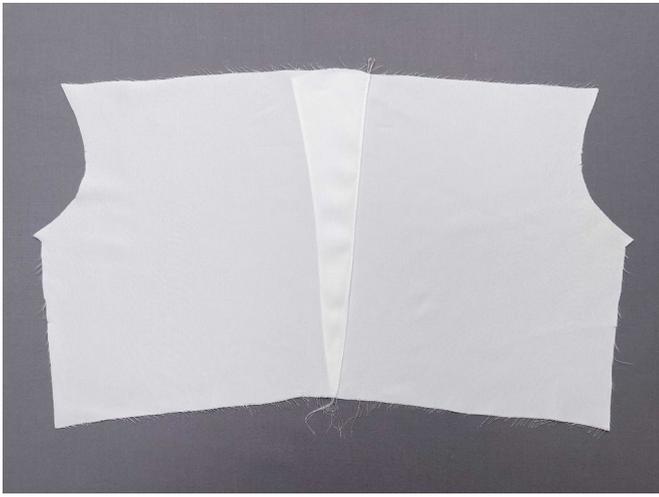


Place the back bodice pieces right side up, one on top of the other, with the left piece on top.

Align the top edges, match the notches, and pin.



Place the back yoke piece to the assembled back bodice pieces, right sides together. Align the edges, match the notches, and pin.

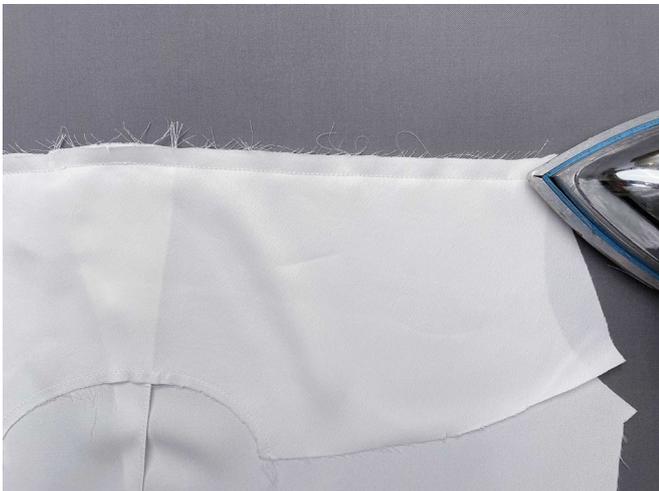

Machine-stitch, backstitching at the beginning and end.

Press the seam.



Place the front bodice piece and the assembled back right sides together. Align the shoulder edges, match the notches, and pin.