

# FROM THE FOUNDER OF THE #VIKISEWS BRAND

---



Back in 2016, when I was working on my first set of sewing instructions, I was trying to write them in such a way that even a complete beginner could easily understand and use them to create their very first garment. These instructions laid the foundation for the Vikisews brand, its vision and its mission. I wanted to create modern patterns with the utmost detailed and clear instructions.

Now, with each new collection we are constantly improving our instructions, amending them and adding more relevant details. By the time the final product reaches you, our drafters, correctors, and editors would have spent weeks perfecting every word and every photograph. If you compile a few of our instructions together, you will get a sewing manual that will assist you in sewing all kinds of garments at any difficulty level.

And I would be very happy if these instructions helped you to turn your hobby into a lifelong passion... Enjoy the process! Create your ultimate dream wardrobe! Wear your garments proudly for years to come!

If you have any questions, please contact us at [info@vikisews.com](mailto:info@vikisews.com) — we are always there to help.



## TYENE PATTERN DESCRIPTION

---

Tyene is a semi-fitted jacket with a straight silhouette. The back of the jacket is fitted with a center seam. The jacket has a classic notched collar with lapels and fastens with buttons and buttonholes at the center front. The free edges of the front facing and back neck facing are secured with decorative topstitching. Tyene is below-waist length.



## IMPORTANT

---

The contents of this pattern are copyright protected and belong exclusively to Vikisews. You may use Vikisews patterns for personal use. It is prohibited to share Vikisews patterns and instructions with third parties, as well as to publish patterns and instructions online for public access. **Non-compliance with the mentioned rules is a violation of the US copyright law and may result in civil liability and criminal prosecution.**

You may use Vikisews patterns for commercial use, to sew custom-made garments and/or create fashion collections, on the condition that the patterns are solely used in a manufacturing setting and are not further shared with individuals.

# TOTAL EASE ALLOWANCE

---

	Bust ease	Waistline ease	Hipline ease
cm	14.6–1.6	33.2–18.4	5–1.3
inches	5 $\frac{3}{4}$ – $\frac{5}{8}$	13 $\frac{1}{8}$ –7 $\frac{1}{4}$	2– $\frac{1}{2}$

# GARMENT LENGTH, SLEEVE LENGTH

---

Height, cm	Back length, cm	Sleeve length, cm
1 (154–160)	48.1–47.8	24.2 – 26.2
2 (162–168)	50.1–49.8	25.4 – 27.4
3 (170–176)	52.1–51.8	26.6 – 30.2
4 (178–184)	54.1–53.8	27.8 – 33.1
Height, ft	Back length, in	Sleeve length, in
1 (5'1"–5'3")	18 $\frac{7}{8}$	9 $\frac{1}{2}$ –10 $\frac{3}{8}$
2 (5'4"–5'6")	19 $\frac{3}{4}$ –19 $\frac{5}{8}$	10–10 $\frac{3}{4}$
3 (5'7"–5'9")	20 $\frac{1}{2}$ –20 $\frac{3}{8}$	10 $\frac{1}{2}$ –11 $\frac{7}{8}$
4 (5'10"–6'1")	21 $\frac{1}{4}$ –21 $\frac{1}{8}$	11–13

# SUGGESTED FABRICS

---

To sew this jacket, choose soft, stretchy or low-stretch (1.2–1.8 stretch factor), medium-weight knit fabrics made of natural, artificial, blended, or synthetic fibers.

The following fabrics are recommended: three-thread fleece knits, double knits, or sweater knits.

**Attention!** We recommend using only stretchy knit fabrics for this jacket.

You can determine the stretch factor yourself. Mark a 10 cm (4") section across the width of the fabric, place it next to a ruler, and stretch it. Divide the resulting measurement by 10.

The jacket in the photo is made of double-layer knit. The fabric is medium-weight, soft, and low-stretch. The fiber content is 68% polyester + 29% viscose + 3% elastane. The fabric weight is 400 g/m<sup>2</sup>. The stretch factor is 1.4.

# FABRIC AND NOTIONS REQUIREMENTS

1. Main fabric, 140 cm wide, with a directional print/nap, in meters:

Height, cm	Size					
	34-36	38	40	42-48	50	52
1 (154-160)	0.85	0.85	1.1	1.1	1.15	1.15
2 (162-168)	0.9	0.9	1.15	1.15	1.15	1.2
3 (170-176)	0.95	0.95	1.15	1.2	1.2	1.25
4 (178-184)	0.95	1	1.2	1.25	1.25	1.3

Main fabric, 55" wide, with a directional print/nap, in yards:

Height, ft	Size					
	34-36	38	40	42-48	50	52
1 (5'1"-5'3")	$\frac{7}{8}$	$\frac{7}{8}$	1 $\frac{1}{4}$	1 $\frac{1}{4}$	1 $\frac{1}{4}$	1 $\frac{1}{4}$
2 (5'4"-5'6")	1	1	1 $\frac{1}{4}$	1 $\frac{1}{4}$	1 $\frac{1}{4}$	1 $\frac{1}{4}$
3 (5'7"-5'9")	1	1	1 $\frac{1}{4}$	1 $\frac{1}{4}$	1 $\frac{1}{4}$	1 $\frac{3}{8}$
4 (5'10"-6'1")	1	1 $\frac{1}{8}$	1 $\frac{1}{4}$	1 $\frac{3}{8}$	1 $\frac{3}{8}$	1 $\frac{3}{8}$

2. Lightweight knit interfacing, 140 cm wide, in meters:

Height, cm	Size			
	34	36-44	46	48-52
1 (154-160)	0.55	0.6	0.6	0.6
2 (162-168)	0.6	0.6	0.65	0.65
3 (170-176)	0.6	0.65	0.65	0.65
4 (178-184)	0.65	0.65	0.65	0.7

Lightweight knit interfacing, 55" wide, in yards:

Height, ft	Size			
	34	36-44	46	48-52
1 (5'1"-5'3")	$\frac{5}{8}$	$\frac{5}{8}$	$\frac{5}{8}$	$\frac{5}{8}$
2 (5'4"-5'6")	$\frac{5}{8}$	$\frac{5}{8}$	$\frac{3}{4}$	$\frac{3}{4}$
3 (5'7"-5'9")	$\frac{3}{4}$	$\frac{3}{4}$	$\frac{3}{4}$	$\frac{3}{4}$
4 (5'10"-6'1")	$\frac{3}{4}$	$\frac{3}{4}$	$\frac{3}{4}$	$\frac{3}{4}$

**IMPORTANT!** When purchasing fabric, please account for shrinkage and buy 5% more than required.

3. Stitched bias-cut fusible stay tape with stitch reinforcement, 1.5 cm (5/8") wide — 2-2.45 m (2 1/8-2 5/8 yd).

4. Three buttons, 15-17 mm (5/8") in diameter.

5. Matching thread — 5 spools (1 spool for the sewing machine + 4 spools for the overlocker).

# TOOLS AND EQUIPMENT

---

- sewing machine for construction
- buttonhole foot for the sewing machine
- overlocker for stitching and finishing raw edges. This may be replaced with a stretch overlock stitch or a zigzag stitch on the sewing machine (overlock or zigzag stitch width 2–3 mm, stitch length 2.5 mm)
- coverstitch or coverlock machine for finishing the garment hem. If you don't have a coverstitch machine, it can be replaced with a twin needle on any regular sewing machine that can do a zigzag stitch

***IMPORTANT!** We recommend using specialty needles when working with knit fabrics (for example, STRETCH, SUPER STRETCH, JERSEY, etc.). These are ballpoint needles, so they part the threads of the fabric you are stitching without piercing them.*

# PATTERN PIECES LIST

---

## 1. From main fabric:

- front — cut 2
- back — cut 2
- sleeve — cut 2
- back neck facing — cut 1
- front facing — cut 2
- upper collar — cut 1
- undercollar — cut 1

## 2. From interfacing:

- back neck facing — cut 1
- front facing — cut 2
- upper collar — cut 1
- undercollar — cut 1

***IMPORTANT!** Don't forget to transfer all pattern markings and notches onto the fabric.*

# SEAM ALLOWANCES

---

All pattern pieces include seam allowances as follows:


- garment hem allowance and sleeve hem allowance – 3 cm (1 1/8")
- all other edges — 1 cm (3/8")

Take this into account when laying out the pattern pieces on the fabric.

# CUTTING LAYOUT


---

Main fabric, 140 cm (55") wide, with a directional print/nap, cut on fold,  
for sizes 34–38 in all heights

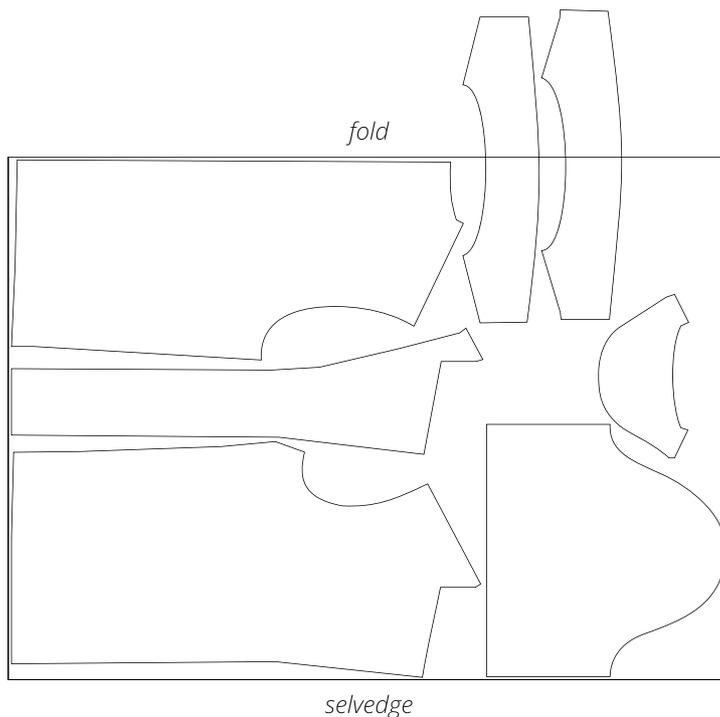

**Important!** Cut one each of the upper collar and undercollar pieces on a single layer out of the leftover fabric. Cut only one back neck facing piece.


Main fabric, 140 cm (55") wide, with a directional print/nap, cut on fold,  
for sizes 40–52 in all heights

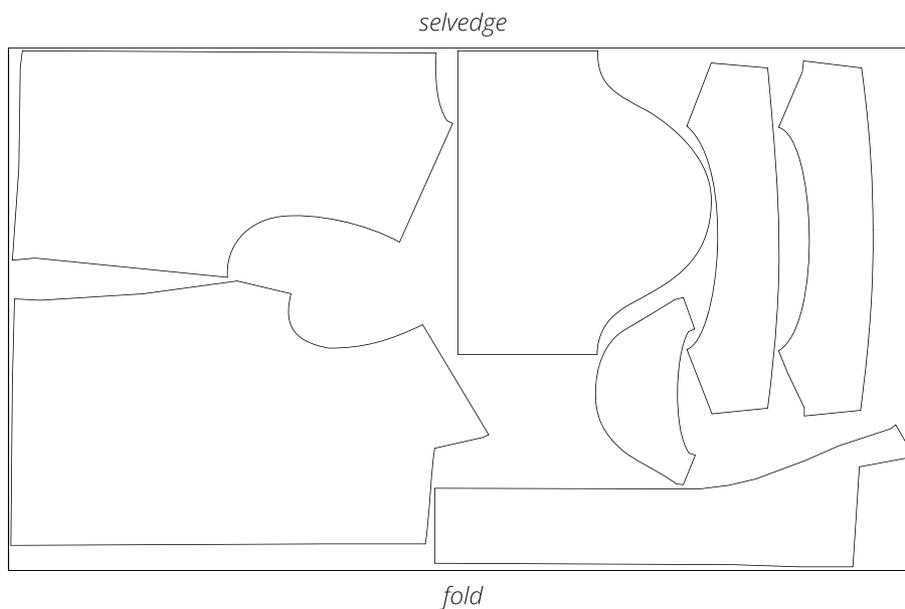

**Important!** Cut one each of the upper collar, undercollar, and back neck facing pieces.

Interfacing, 140 cm (55") wide,  
cut on fold, for all sizes in all heights

*fold*

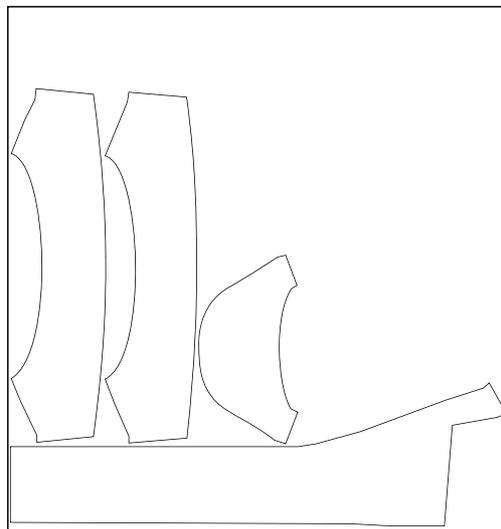

*selvedge*

**Important!** Cut one each of the upper collar,  
undercollar, and back neck facing pieces.

**READY? LET'S GET SEWING!**

---



Overlock the dart seam allowances, with the bottom part of the front piece facing up.



Hide the thread tails inside the stitching, using a latch hook or needle.



Press the dart seam allowances upward.



Place the back pieces right sides together. Align the center back edges, match the notches, and pin.

Overlock the seam allowances, with the right back piece facing up.