

Viki

S E W S

RAINCOAT

ALYSANNE



SIZES

XS-XL

DIFFICULTY



ADVANCED

FROM THE FOUNDER OF THE VIKISEWS® BRAND



Back in 2016, when I started making my first sewing patterns and instruction manuals, my main goal was to solve the problems I personally faced at the beginning of my sewing journey: the lack of stylish patterns that provide a great fit and contain clear sewing instructions. That's how Vikisews was born—a brand designed to help you create fashionable, on-trend clothing with your own hands.



The sewing instructions we create is the result of our team's careful, meticulous work. May they help you develop your sewing hobby—or even turn it into your life's work! Enjoy every step of the sewing process and create a thoughtful, stylish wardrobe!

If you have any questions, we're always here to help: info@vikisews.com



ALYSANNE PATTERN DESCRIPTION

Alysanne is a loose-fitting, O-shape raincoat. The front has slanted design lines. The back has a center seam. The stand collar closes with snaps and a topstitched tab with D-rings. The voluminous one-piece raglan sleeves are gathered at the bottom and finished with cuffs. There are pockets in the slanted seams on the front. The hem is gathered. All seams are topstitched. The raincoat is fully lined and has an off-center hidden snap closure. Alysanne is below-knee length.



PLEASE READ BEFORE USE

The contents of this pattern are copyright protected and belong exclusively to Vikisews. You may use Vikisews patterns for personal use. It is prohibited to share Vikisews patterns and instructions with third parties, as well as to publish patterns and instructions online for public access. **Non-compliance with the mentioned rules is a violation of the US copyright law and may result in civil liability and criminal prosecution.**

You may use Vikisews patterns for commercial use, to sew custom-made garments and/or create fashion collections, on the condition that the patterns are solely used in a manufacturing setting and are not further shared with individuals.

TOTAL EASE ALLOWANCE

	Bust ease	Waistline ease	Hipline ease	Upper arm ease
cm	65.6–44	123.1–101	105.9–119.7	57.8–45.2
inches	25 7/8–17 3/8	48 1/2–39 3/4	41 3/4–47 1/8	22 3/4–17 3/4

GARMENT LENGTH, SLEEVE LENGTH

Height, cm	Center back length, cm	Sleeve length including shoulder width, cm
1 (154–160)	117.3–118.5	66.8–68.7
2 (162–168)	121.3–122.5	68.7–70.6
3 (170–176)	125.3–126.5	70.6–72.4
4 (178–184)	129.3–130.5	72.4–74.3

Height, ft	Center back length, in	Sleeve length including shoulder width, in
1 (5'1"–5'3")	46 1/8–46 5/8	26 1/4–27
2 (5'4"–5'6")	47 3/4–48 1/4	27–27 3/4
3 (5'7"–5'9")	49 3/8–49 3/4	27 3/4–28 1/2
4 (5'10"–6'1")	50 7/8–51 3/8	28 1/2–29 1/4

SUGGESTED FABRICS

To sew this raincoat, choose medium-weight, soft, non-stretch, opaque outerwear and raincoat fabrics made of natural, artificial, blended, or synthetic fibers.

The following fabrics are recommended: outerwear fabric, raincoat fabric, gabardine, and denim.

For the lining, we recommend using lining fabrics made of artificial fibers (viscose), blended fibers (viscose + elastane, viscose + polyester), or synthetic fibers (polyester, polyester + elastane).

The raincoat in the photo is made of raincoat fabric. The fabric is medium-weight, soft, and non-stretch. The fiber content is 100% polyester. The fabric weight is 150 g/m².

The lining is made of 100% viscose. The lining fabric weight is 95 g/m².

FABRIC AND NOTIONS REQUIREMENTS

1. Main fabric, 140 cm wide, with a directional print/nap, in meters:

Height, cm	Size		
	XS-S	M-L	XL
1 (154–160)	3.85	4.2	4.5
2 (162–168)	4	4.3	4.65
3 (170–176)	4.1	4.45	4.75
4 (178–184)	4.2	4.6	4.9

Main fabric, 55" wide, with a directional print/nap, in yards:

Height, ft	Size		
	XS-S	M-L	XL
1 (5'1"–5'3")	4 1/4	4 5/8	4 7/8
2 (5'4"–5'6")	4 3/8	4 3/4	5 1/8
3 (5'7"–5'9")	4 1/2	4 7/8	5 1/4
4 (5'10"–6'1")	4 5/8	5	5 3/8

2. Lining fabric, 140 cm wide, with a directional print, in meters:

Height, cm	Size		
	XS-S	M-L	XL
1 (154–160)	2.7	2.8	2.95
2 (162–168)	2.8	2.9	3
3 (170–176)	2.9	3	3.1
4 (178–184)	3	3.1	3.2

Lining fabric, 55" wide, with a directional print, in yards:

Height, ft	Size		
	XS-S	M-L	XL
1 (5'1"–5'3")	3	3	3 1/4
2 (5'4"–5'6")	3	3 1/8	3 1/4
3 (5'7"–5'9")	3 1/8	3 1/4	3 3/8
4 (5'10"–6'1")	3 1/4	3 3/8	3 1/2

IMPORTANT! When purchasing fabric, please account for shrinkage and buy 5% more than required.

3. Non-fusible non-woven interlining (sew-in Vlieseline), 140 cm (55") wide, for all sizes in all heights — 0.4 m (15 3/4").

4. Two D-rings, 4.5 cm (1 3/4") in size

5. Six metal set-in snaps (+1–2 spare), 12.5 mm (1/2") in diameter

6. Matching thread — 1 spool for the sewing machine

7. Matching topstitching thread (e.g., Madeira No. 35) — 2 spools

TOOLS AND EQUIPMENT

- sewing machine for construction
- stitch-in-the-ditch foot (optional)
- hole puncher or awl
- press tool and molds for installing snaps

PATTERN PIECES LIST

1. From main fabric:

- top front — cut 2
- mid front — cut 2
- bottom front — cut 2
- back — cut 2
- sleeve — cut 2
- stand collar — cut 2
- stand collar tab — cut 2
- D-ring holder — cut 2
- cuff — cut 2
- back neck facing — cut 1 on fold
- front facing — cut 2
- back hem facing — cut 1 on fold
- pocket facing — cut 2

2. From lining fabric:

- front lining — cut 2
- back lining — cut 2
- sleeve lining — cut 2
- pocket lining — cut 4

***IMPORTANT!** Don't forget to transfer all pattern markings and notches onto the fabric.*

3. From interlining:

- stand collar — cut 1
- stand collar tab — cut 1
- D-ring holder — cut 1
- pocket facing — cut 2
- cuff — cut 2


SEAM ALLOWANCES

All pattern pieces include 1 cm (3/8") seam allowances.


Take this into account when laying out the pattern pieces on the fabric.

CUTTING LAYOUT


Main fabric, 140 cm (55") wide, with a directional print/nap,
cut on a single layer, for sizes XS-S in all heights

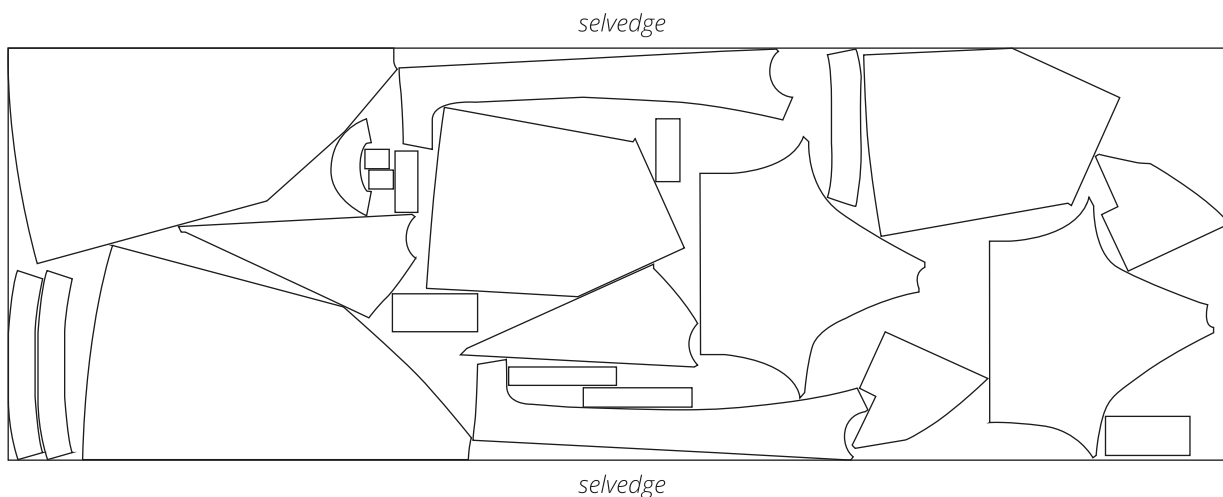


Main fabric, 140 cm (55") wide, with a directional print/nap,
cut on a single layer, for sizes M-L in all heights

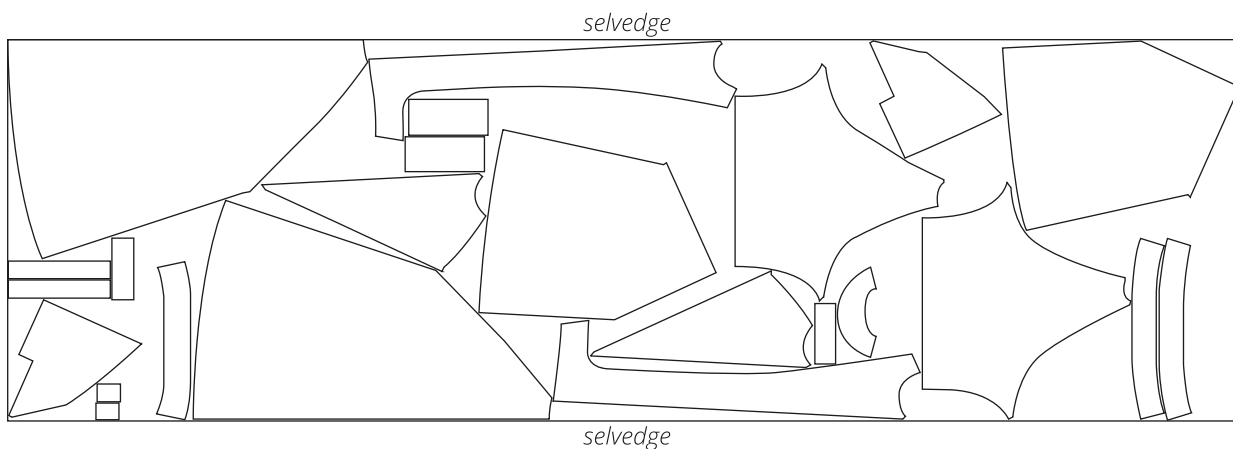


Main fabric, 140 cm (55") wide, with a directional print/nap,
cut on a single layer, for size XL in all heights

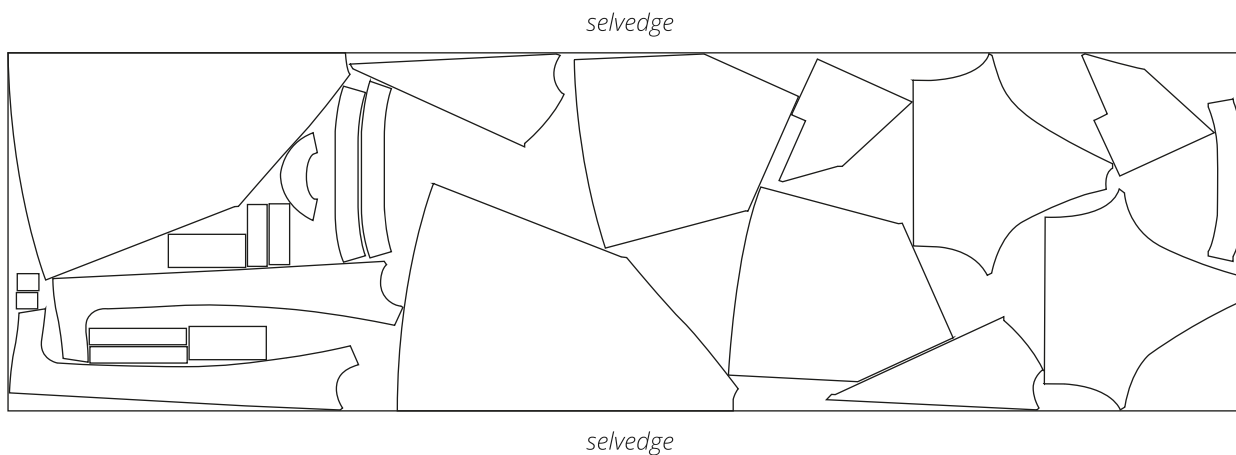

Lining fabric, 140 cm (55") wide, with a directional print,
cut on a single layer, for all sizes in all heights

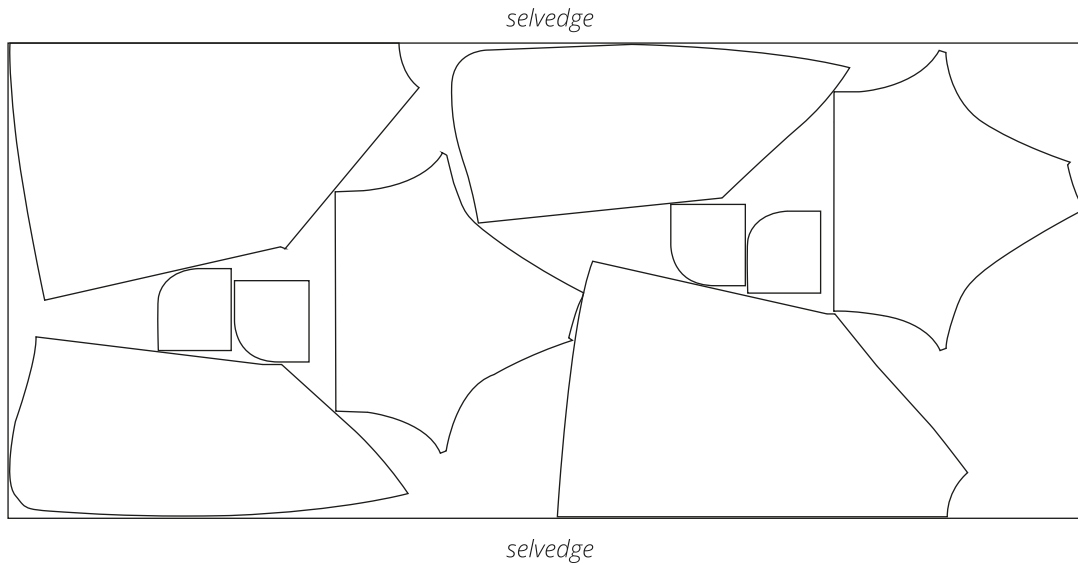


Interlining, 140 cm (55") wide, cut in one direction on a single layer,
for all sizes in all heights

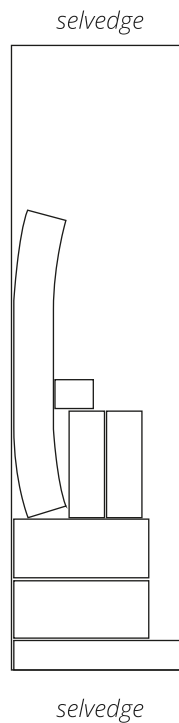

READY? LET'S GET SEWING!




9. Working on the wrong side of the mid front piece, use tailor's chalk to mark the seam line intersection at the corner.

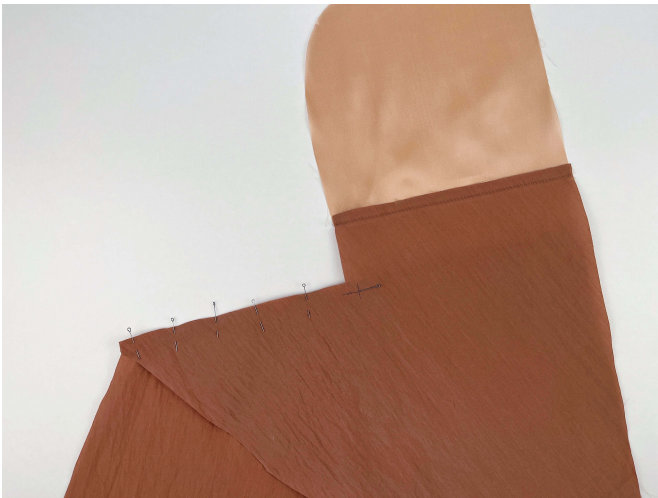

10. Place the mid front and bottom front pieces right sides together, align the diagonal edges, match the seam line intersection point with the pocket notch on the bottom front piece, and pin.

11. Machine-stitch from the side edge to the seam line intersection point, backstitching at the beginning and end of the seam.

Important! The seam should end exactly at the end of the pocket facing seam.

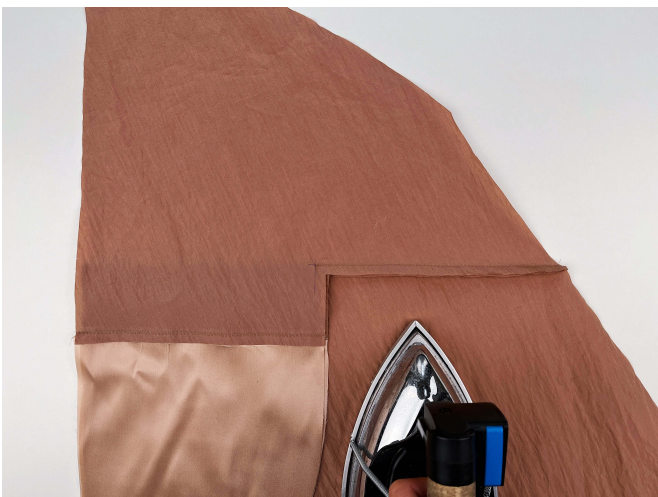

12. Press the seam allowances towards the bottom front piece.