

Viki
S E W S

JACKET
FERGIE



SIZES
34-52

DIFFICULTY



ADVANCED



FROM THE FOUNDER OF THE VIKISEWS® BRAND



Back in 2016, when I started making my first sewing patterns and instruction manuals, my main goal was to solve the problems I personally faced at the beginning of my sewing journey: the lack of stylish patterns that provide a great fit and contain clear sewing instructions. That's how Vikisews was born—a brand designed to help you create fashionable, on-trend clothing with your own hands.



The sewing instructions we create is the result of our team's careful, meticulous work. May they help you develop your sewing hobby—or even turn it into your life's work! Enjoy every step of the sewing process and create a thoughtful, stylish wardrobe!

If you have any questions, we're always here to help: info@vikisews.com



FERGIE PATTERN DESCRIPTION

Fergie is a loose-fitting lined jacket with a straight silhouette. The fronts feature pockets set into the darts, and the left front has a welt pocket with a shaped welt. The shoulder line is extended and shaped with shoulder pads. The jacket has a stand collar. The sleeves are loose-fitting and made up of two pieces; the bottom edges are finished with vents closing with buttons. The jacket has an off-center button and buttonhole closure. Fergie is above-hip length.



PLEASE READ BEFORE USE

The contents of this pattern are copyright protected and belong exclusively to Vikisews. You may use Vikisews patterns for personal use. It is prohibited to share Vikisews patterns and instructions with third parties, as well as to publish patterns and instructions online for public access. **Non-compliance with the mentioned rules is a violation of the US copyright law and may result in civil liability and criminal prosecution.**

You may use Vikisews patterns for commercial use, to sew custom-made garments and/or create fashion collections, on the condition that the patterns are solely used in a manufacturing setting and are not further shared with individuals.

TOTAL EASE ALLOWANCE

	Bust ease	Waistline ease	Hipline ease	Upper arm ease
cm	26.9–20.1	39.8–37	8–8.1	11.8–7.6
inches	10 5/8–7 7/8	15 5/8–14 5/8	3 1/8–3 1/4	4 5/8–3

GARMENT LENGTH, SLEEVE LENGTH

Height, cm	Center back length, cm	Sleeve length including shoulder width, cm
1 (154–160)	46.3–51.1	74.1–77.8
2 (162–168)	49.3–53.5	76–79.7
3 (170–176)	52.3–56.5	77.9–81.6
4 (178–184)	55.3–59.5	79.8–83.6

Height, ft	Center back length, in	Sleeve length including shoulder width, in
1 (5'1"–5'3")	18 1/4–20 1/8	29 1/8–30 5/8
2 (5'4"–5'6")	19 3/8–21 1/8	29 7/8–31 3/8
3 (5'7"–5'9")	20 5/8–22 1/4	30 5/8–32 1/8
4 (5'10"–6'1")	21 3/4–23 3/8	31 3/8–32 7/8

SUGGESTED FABRICS

To sew this jacket, choose suiting fabrics with the following properties: medium-weight, pliable, structured, non-stretch or low-stretch. The fiber content can include natural fibers (wool), artificial fibers (viscose), blended fibers (wool + silk, wool + polyester, etc.), or synthetic fibers (polyester).

The following fabrics are recommended: suiting, coating fabric, denim, tapestry, corduroy, and melton wool.

Attention! We do not recommend stretchy knit fabrics, soft and lightweight fabrics (dress-weight wool), or suiting fabrics with a loose structure.

For the lining, we recommend using lining fabrics made of artificial fibers (viscose), blended fibers (viscose + elastane, viscose + polyester), or synthetic fibers (polyester, polyester + elastane).

The blazer in the photo is made of wool coating. The fabric is medium weight, soft, non-stretch, and structured. The fiber content is 100% wool. The fabric weight is 450 g/m².

The collar is made of wool felt. The fiber content is 100% wool. The fabric weight is 140 g/m².

The lining is made of 55% viscose + 45% polyester. The lining fabric weight is 95 g/m².

FABRIC AND NOTIONS REQUIREMENTS

1. Main fabric, 140 cm wide, with a directional print/nap (with the collar made from the main fabric), in meters:

Height, cm	34	36-38	40	42	44	46	48	50	52
1 (154-160)	1.35	1.4	1.45	1.55	1.65	1.7	1.8	1.8	1.85
2 (162-168)	1.4	1.45	1.5	1.6	1.75	1.75	1.85	1.85	1.9
3 (170-176)	1.5	1.5	1.6	1.7	1.8	1.85	1.9	1.95	2
4 (178-184)	1.5	1.55	1.65	1.75	1.9	1.9	2	2	2.05

Main fabric, 55" wide, with a directional print/nap (with the collar made from the main fabric), in yards:

Height, ft	34	36-38	40	42	44	46	48-50	52
1 (5'1"-5'3")	1 1/2	1 1/2	1 5/8	1 3/4	1 3/4	1 7/8	2	2
2 (5'4"-5'6")	1 1/2	1 5/8	1 5/8	1 3/4	1 7/8	1 7/8	2	2 1/8
3 (5'7"-5'9")	1 5/8	1 5/8	1 3/4	1 7/8	2	2	2 1/8	2 1/8
4 (5'10"-6'1")	1 5/8	1 3/4	1 3/4	1 7/8	2 1/8	2 1/8	2 1/8	2 1/4

2. Main fabric, 140 cm wide, with a directional print/nap (with the collar made from the additional fabric), in meters:

Height, cm	34	36	38	40	42	44	46	48	50	52
1 (154-160)	1.2	1.2	1.3	1.45	1.55	1.65	1.7	1.8	1.8	1.85
2 (162-168)	1.25	1.25	1.35	1.5	1.6	1.75	1.75	1.85	1.85	1.9
3 (170-176)	1.3	1.35	1.45	1.6	1.7	1.8	1.85	1.9	1.95	2
4 (178-184)	1.35	1.45	1.55	1.65	1.75	1.9	1.9	2	2	2.05

Main fabric, 55" wide, with a directional print/nap (with the collar made from the additional fabric), in yards:

Height, ft	34	36	38	40	42	44	46	48-50	52
1 (5'1"-5'3")	1 1/4	1 1/4	1 3/8	1 5/8	1 3/4	1 3/4	1 7/8	2	2
2 (5'4"-5'6")	1 3/8	1 3/8	1 1/2	1 5/8	1 3/4	1 7/8	1 7/8	2	2 1/8
3 (5'7"-5'9")	1 3/8	1 1/2	1 5/8	1 3/4	1 7/8	2	2	2 1/8	2 1/8
4 (5'10"-6'1")	1 1/2	1 5/8	1 3/4	1 3/4	1 7/8	2 1/8	2 1/8	2 1/8	2 1/4

3. Additional fabric (felt), 140 cm (55") wide, for cutting the stand collar pieces in one direction, for all sizes in all heights — 16 cm (6 1/4").

4. Lining fabric, 140 cm wide, with a directional print, in meters:

Height, cm	34–38	40	42–44	46	48–50	52
1 (154–160)	1.1	1.15	1.15	1.2	1.2	1.2
2 (162–168)	1.15	1.2	1.2	1.25	1.25	1.25
3 (170–176)	1.2	1.25	1.25	1.25	1.3	1.3
4 (178–184)	1.25	1.25	1.3	1.3	1.3	1.35

Lining fabric, 55" wide, with a directional print, in yards:

Height, ft	34–38	40–44	46–50	52
1 (5'1"–5'3")	1 1/4	1 1/4	1 1/4	1 1/4
2 (5'4"–5'6")	1 1/4	1 1/4	1 3/8	1 3/8
3 (5'7"–5'9")	1 1/4	1 3/8	1 3/8	1 3/8
4 (5'10"–6'1")	1 3/8	1 3/8	1 3/8	1 1/2

IMPORTANT! When purchasing fabric, please account for shrinkage and buy 5% more than required.

5. Lightweight interfacing, knit or woven, 140 cm wide, in meters:

Height, cm	34–36	38	40	42	44	46–48	50–52
1 (154–160)	1.35	1.4	1.45	1.5	1.55	1.7	1.75
2 (162–168)	1.4	1.45	1.5	1.55	1.6	1.75	1.8
3 (170–176)	1.45	1.5	1.5	1.6	1.65	1.8	1.85
4 (178–184)	1.5	1.55	1.55	1.65	1.7	1.85	1.95

Lightweight interfacing, knit or woven, 55" wide, in yards:

Height, ft	34–36	38	40	42	44	46–48	50–52
1 (5'1"–5'3")	1 1/2	1 1/2	1 5/8	1 5/8	1 3/4	1 7/8	1 7/8
2 (5'4"–5'6")	1 1/2	1 5/8	1 5/8	1 3/4	1 3/4	1 7/8	2
3 (5'7"–5'9")	1 5/8	1 5/8	1 5/8	1 3/4	1 3/4	2	2
4 (5'10"–6'1")	1 5/8	1 3/4	1 3/4	1 3/4	1 7/8	2	2 1/8

6. Stitched bias-cut fusible stay tape with stitch reinforcement, 1.5 cm (5/8") wide — 75 cm (29 1/2").

7. Stitched straight-grain fusible stay tape, 1 cm (3/8") wide — 1.6 m (1 3/4 yd).

8. Non-woven interfacing for the shoulder pads, 150 cm (59") wide, for all sizes in all heights — 25 cm (10").
9. One pair of ready-made shoulder pads, 1–1.5 cm (3/8–5/8") tall (or ready-made pads, 3 cm (1 1/8") tall, in which case item 8 is not needed).
10. One pair of sleeve heads.
11. Three buttons, 1.8–2.2 cm (3/4–7/8") in diameter.
12. Three backing buttons, 5–7 mm (1/4") in diameter.
13. Six buttons, 1–1.5 cm (3/8–5/8") in diameter, for the sleeve vents.
14. Matching thread — 2 spools.

TOOLS AND EQUIPMENT

- sewing machine for construction
- buttonhole foot
- stitch-in-the-ditch foot (optional)

PATTERN PIECES LIST

1. From main fabric:

- front — cut 2
- back — cut 1 on fold
- top sleeve — cut 2
- bottom sleeve — cut 2
- side pocket facing — cut 2
- chest pocket welt — cut 1
- chest pocket facing — cut 1
- front facing — cut 2
- back facing — cut 1 on fold

2. From additional fabric:

- outer stand collar — cut 1 on fold
- inner stand collar — cut 1 on fold

3. From lining fabric:

- front lining — cut 2
- back lining — cut 1 on fold
- top sleeve lining — cut 2
- bottom sleeve lining — cut 2
- bottom side pocket lining — cut 2
- top side pocket lining — cut 2
- bottom chest pocket lining — cut 1
- top chest pocket lining — cut 1

4. From non-woven interfacing for the shoulder pads:

- shoulder pad — cut 2 (5 layers)

5. From interfacing:

- front — cut 2
- back — cut 1 on fold
- side pocket facing — cut 2
- chest pocket welt — cut 1
- chest pocket facing — cut 1
- front facing — cut 2
- back facing — cut 1 on fold
- outer stand collar — cut 1 on fold
- inner stand collar — cut 1 on fold

6. Additionally, cut the following from interfacing:

- second and third interfacing layers for the front pieces (sections marked on the pattern)
- second and third interfacing layers for the back piece (sections marked on the pattern)
- sleeve cap sections and bottom sections on the top sleeve and bottom sleeve pieces

The interfacing strips should be cut on the straight grain (parallel to the selvedge).

IMPORTANT! Don't forget to transfer all pattern markings and notches onto the fabric.

IMPORTANT! If the pattern pieces have the inscription "face," these pieces should be cut on the right side of the fabric.

SEAM ALLOWANCES


All pattern pieces include seam allowances as follows:

- garment hem allowance — 4 cm (1 5/8")
- sleeve hem allowance — 4 cm (1 5/8")
- all other edges — 1 cm (3/8")

Take this into account when laying out the pattern pieces on the fabric.

CUTTING LAYOUT


Main fabric (all pieces), 140 cm (55") wide, with a directional print/nap, cut on fold, for sizes 34–42 in all heights

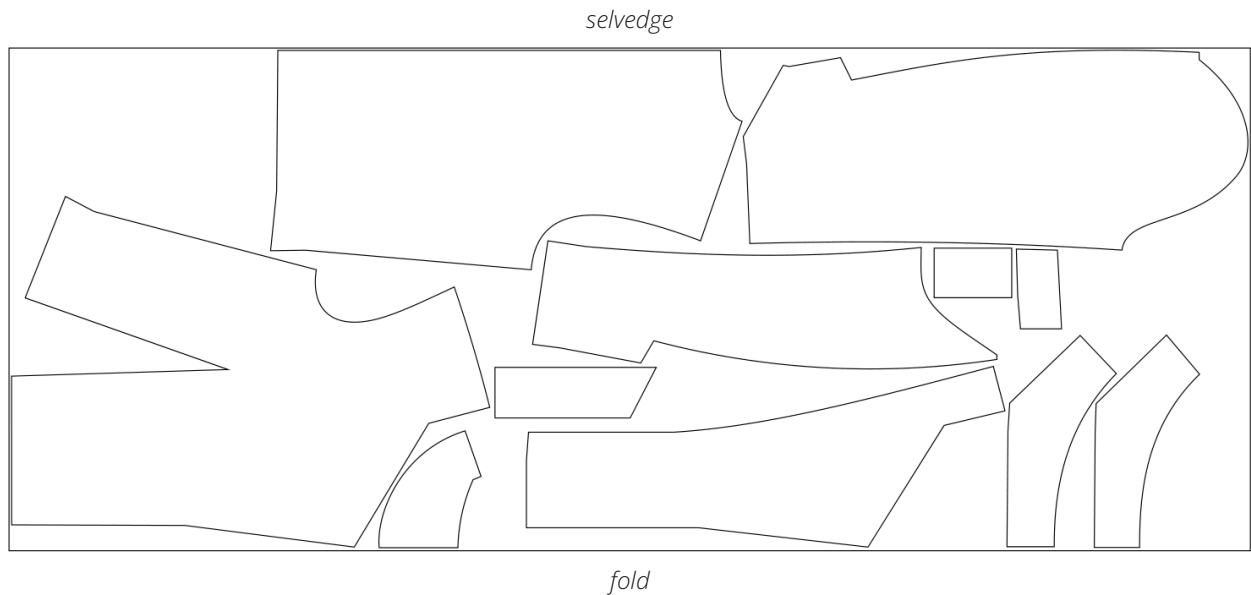

Attention! Cut one each of the chest pocket welt and chest pocket facing pieces.

Main fabric (all pieces), 140 cm (55") wide, with a directional print/nap, cut on fold, for sizes 44–46 in all heights

fold

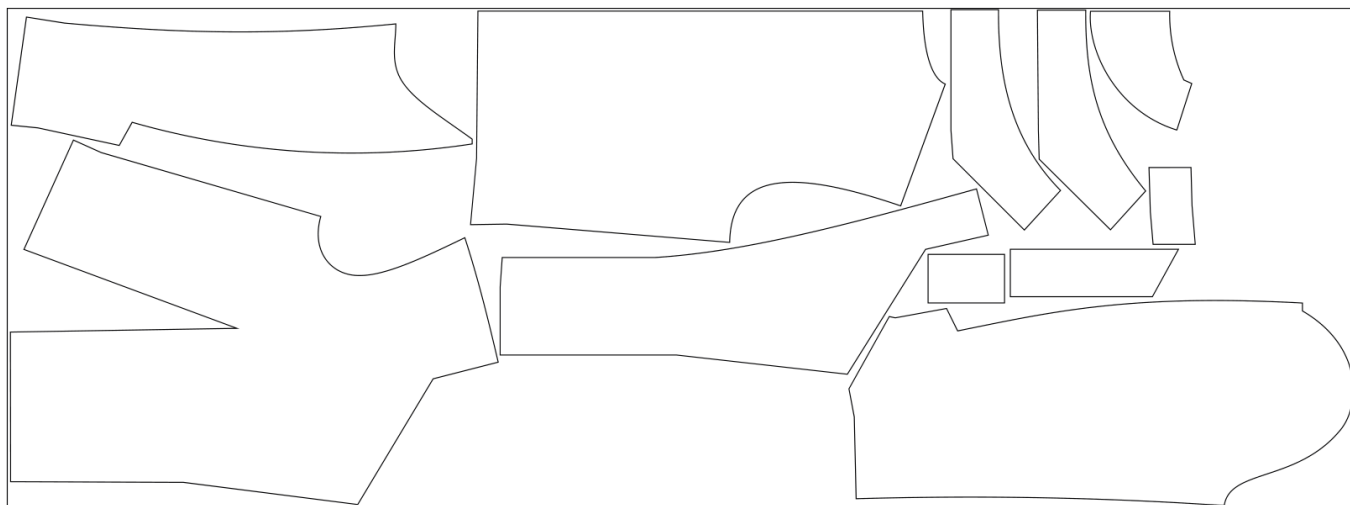


selvage

Attention! Cut one each of the chest pocket welt and chest pocket facing pieces.

Main fabric (all pieces), 140 cm (55") wide, with a directional print/nap, cut on fold, for sizes 48–52 in all heights


fold

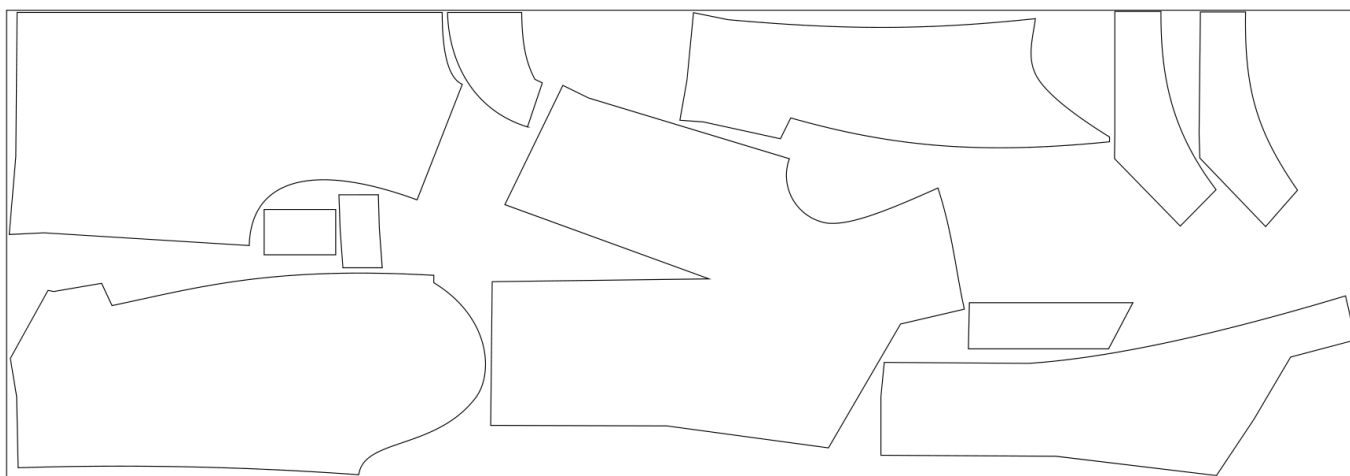

selvage


Attention! Cut one each of the chest pocket welt and chest pocket facing pieces.

Main fabric (without the collar pieces), 140 cm (55") wide, with a directional print/nap, cut on fold, for sizes 34–42 in all heights

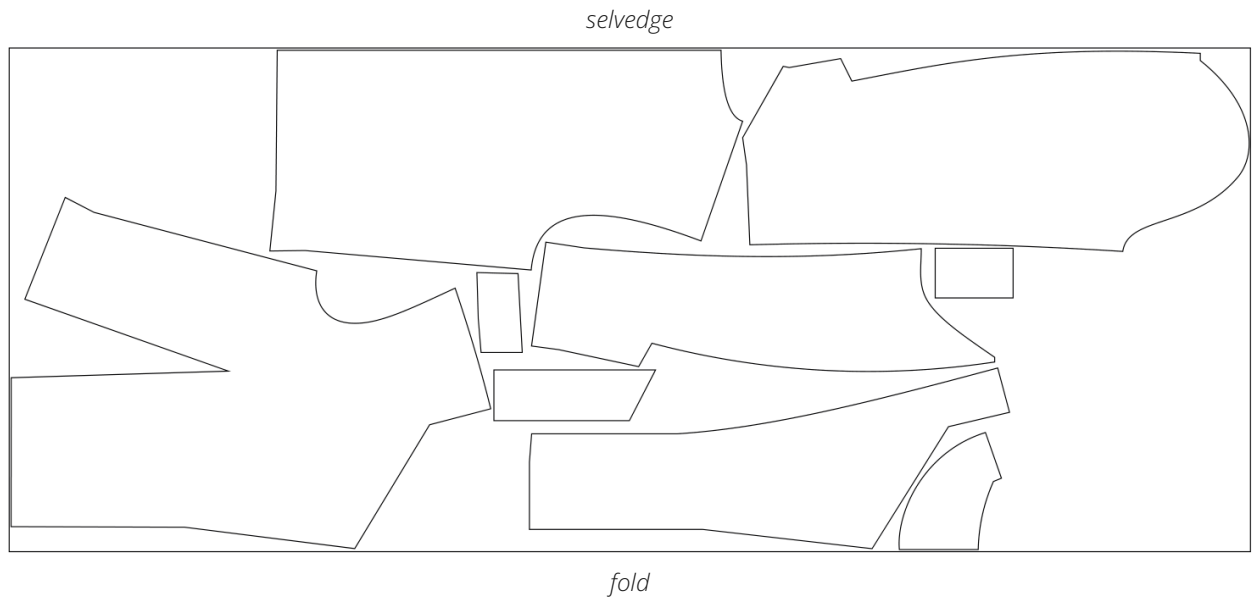


Attention! Cut one each of the chest pocket welt and chest pocket facing pieces.

Main fabric (without the collar pieces), 140 cm (55") wide, with a directional print/nap, cut on fold, for sizes 44–46 in all heights

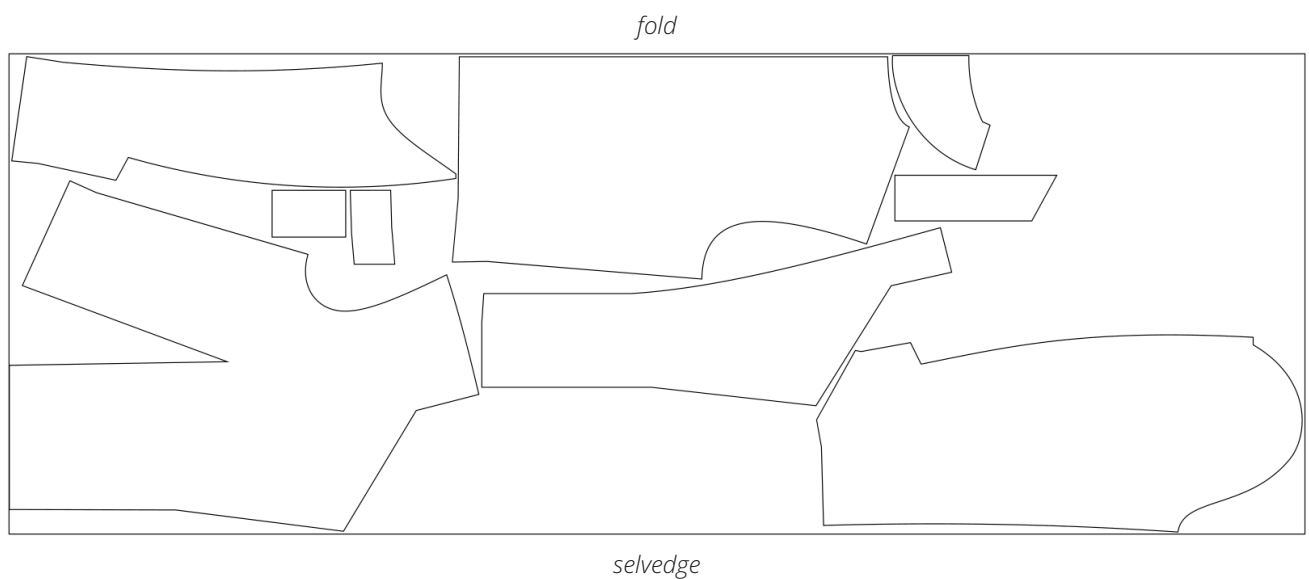


Attention! Cut one each of the chest pocket welt and chest pocket facing pieces.

Main fabric (without the collar pieces), 140 cm (55") wide, with a directional print/nap, cut on fold, for sizes 48–52 in all heights

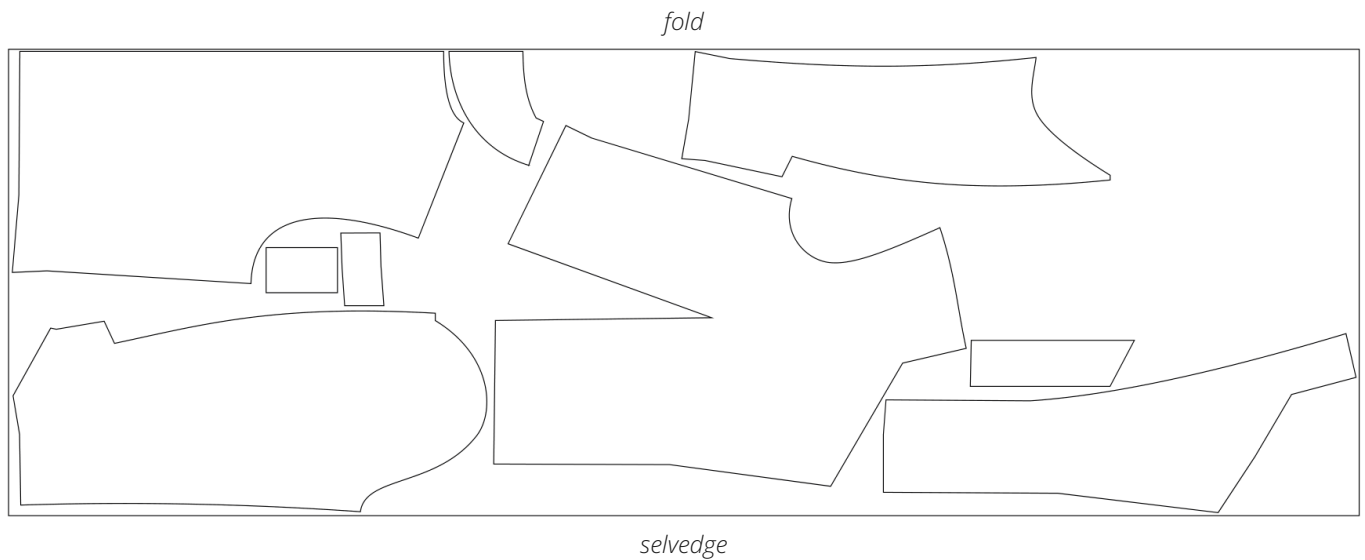


Attention! Cut one each of the chest pocket welt and chest pocket facing pieces.

Additional fabric (collar pieces), 140 cm (55") wide, with a directional print/nap, cut with two folds, for all sizes in all heights




Lining fabric, 140 cm (55") wide, with a directional print, cut on fold, for all sizes in all heights

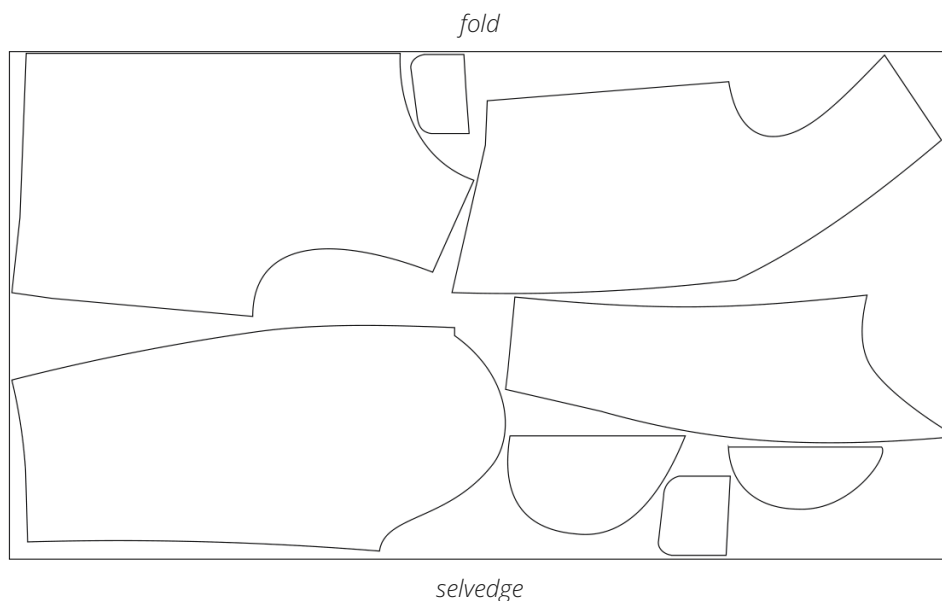

Attention! Cut one each of the top chest pocket lining and bottom chest pocket lining pieces.

Interfacing, 140 cm (55") wide, cut on fold, for sizes 34–40 in all heights

fold

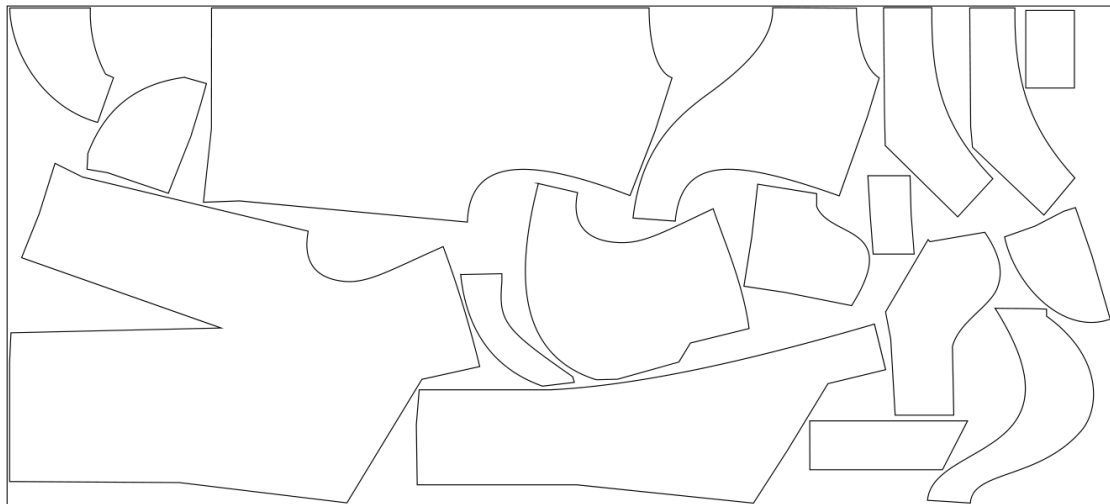


selvedge

Attention! Cut one each of the chest pocket welt and chest pocket facing pieces.

Interfacing, 140 cm (55") wide, cut on fold, for sizes 42–44 in all heights


fold

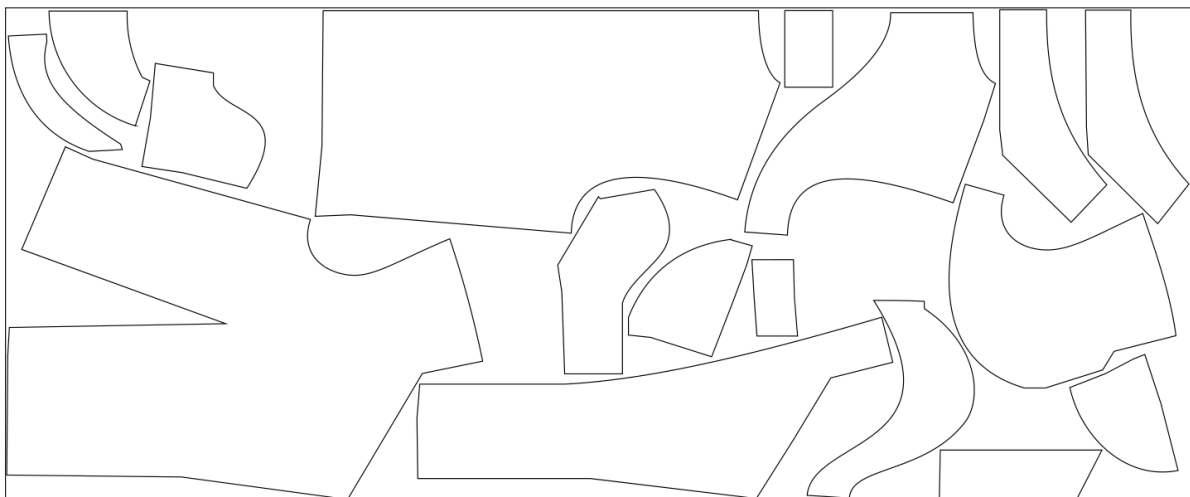

selvedge


Attention! Cut one each of the chest pocket welt and chest pocket facing pieces.

Interfacing, 140 cm (55") wide, cut on fold, for sizes 46–52 in all heights

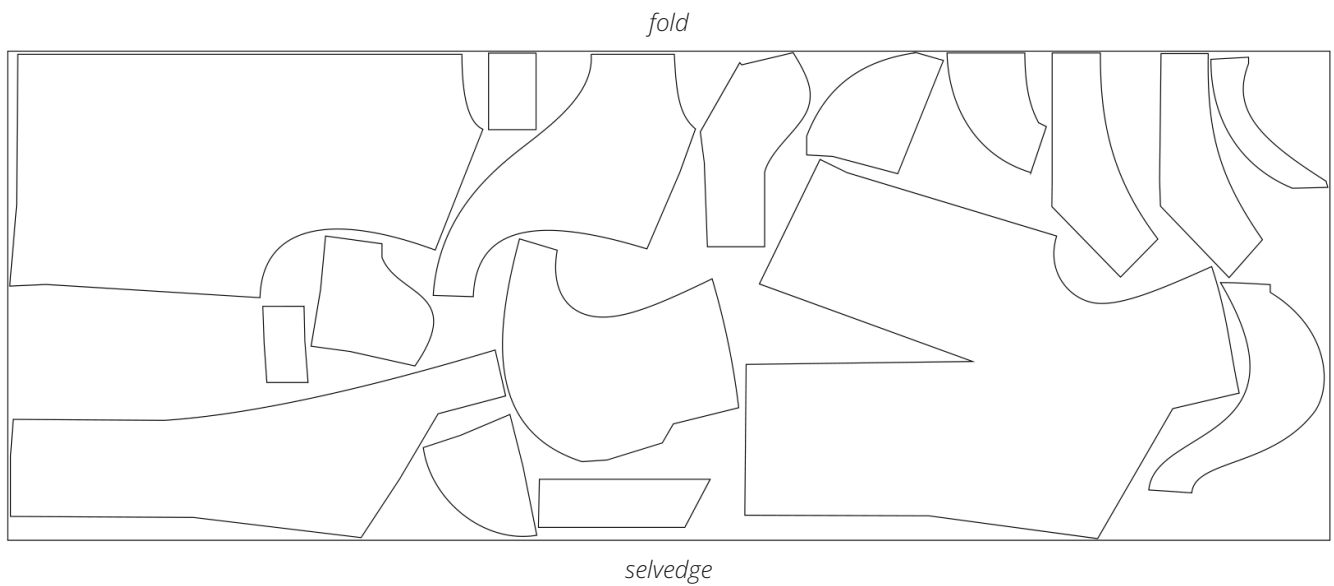


Attention! Cut one each of the chest pocket welt and chest pocket facing pieces.

Additional non-woven interfacing, 150 cm (59") wide, cut on fold and in one direction, for all sizes in all heights

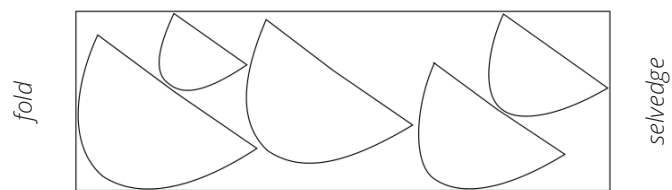


READY? LET'S GET SEWING!

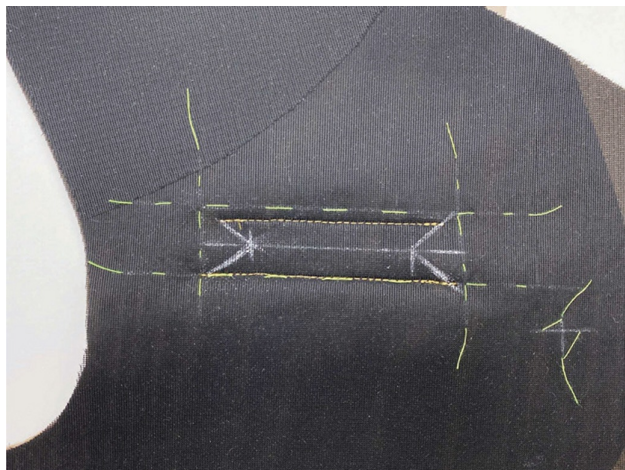

14. Working on the wrong side of the front piece, transfer the pocket opening cutting lines from the pattern.



15. Cut the pocket open along the marked lines. Precision is very important when slashing a pocket. When clipping towards the corners, stop 1-2 mm short of the stitching line.

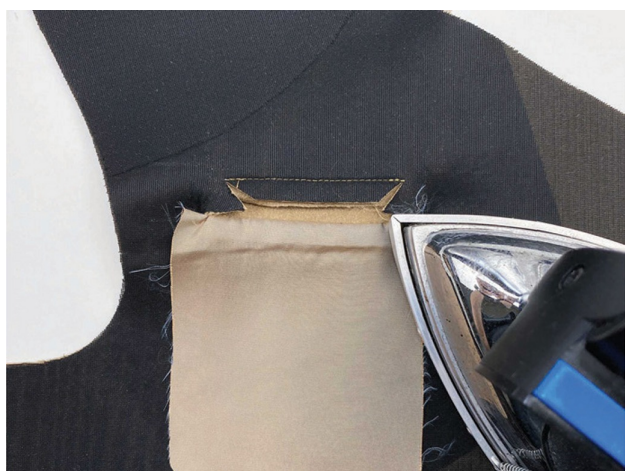


16. Turn the welt with its lining to the wrong side of the front piece and smooth it out.
Press the welt with its lining.



17. Turn the pocket facing with its lining to the wrong side of the front piece and smooth it out.
Press the pocket facing.



18. Fold the corners of the pocket side edges to the wrong side to form right angles, and pin.

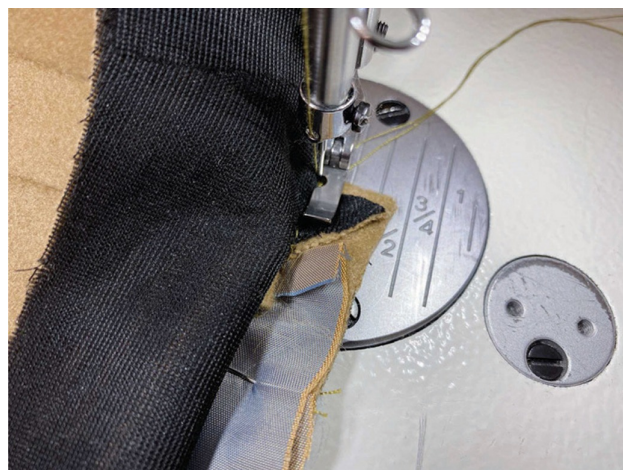

19. Machine-stitch the pocket side corners to the chest pocket welt piece, going back and forth three times.