

Viki

S E W S

JACKET

RHAENYS



SIZES

XS-XL

DIFFICULTY



ADVANCED



FROM THE FOUNDER OF THE VIKISEWS® BRAND




Back in 2016, when I started making my first sewing patterns and instruction manuals, my main goal was to solve the problems I personally faced at the beginning of my sewing journey: the lack of stylish patterns that provide a great fit and contain clear sewing instructions. That's how Vikisews was born—a brand designed to help you create fashionable, on-trend clothing with your own hands.



The sewing instructions we create is the result of our team's careful, meticulous work. May they help you develop your sewing hobby—or even turn it into your life's work! Enjoy every step of the sewing process and create a thoughtful, stylish wardrobe!

If you have any questions, we're always here to help: info@vikisews.com

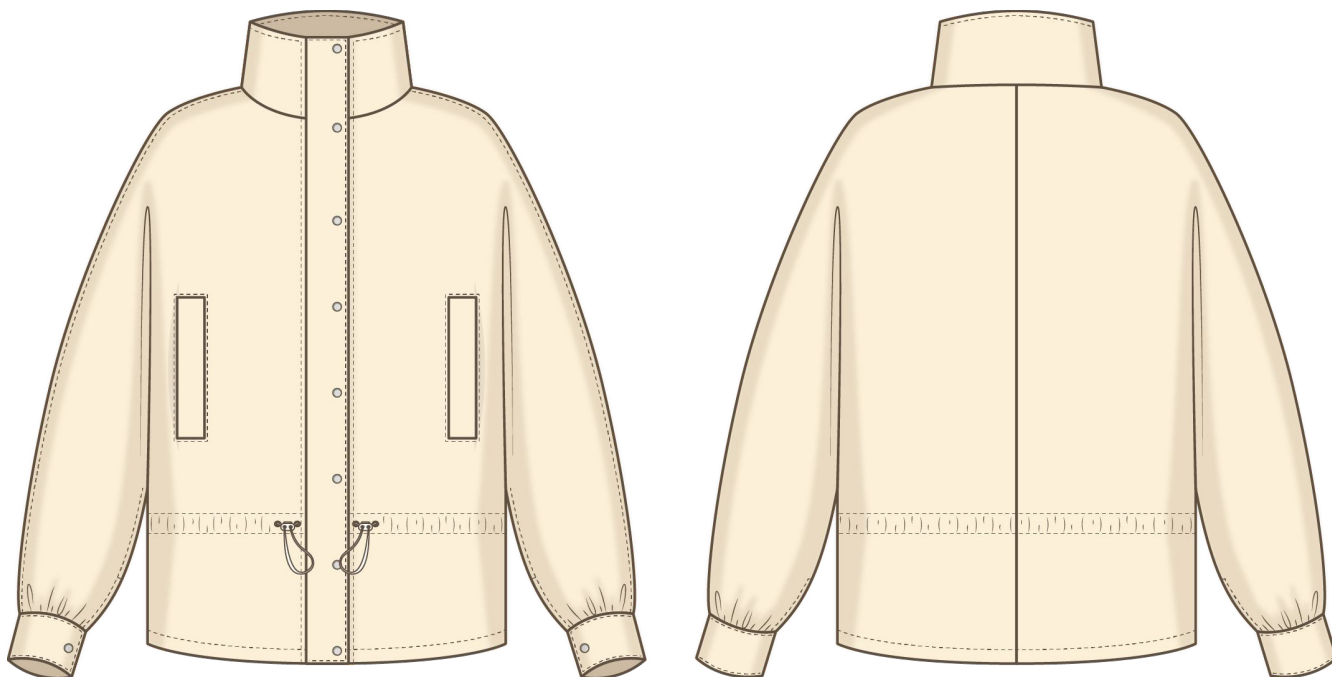

RHAENYS PATTERN DESCRIPTION

Rhaenys is a loose-fitting lined jacket with a straight silhouette. The front features welt pockets, and the back has a center seam. There is a casing sitting 5 cm (2") below the natural waistline, with an elastic cord and cord stoppers threaded through it. The jacket has a high stand collar and grown-on sleeves with a slit in the underarm seam; the bottom edges of the sleeves are gathered and finished with cuffs closing with snaps. The jacket closes with plackets with set-in snaps. All seams are topstitched. Rhaenys is hip-length.



PLEASE READ BEFORE USE

The contents of this pattern are copyright protected and belong exclusively to Vikisews. You may use Vikisews patterns for personal use. It is prohibited to share Vikisews patterns and instructions with third parties, as well as to publish patterns and instructions online for public access. **Non-compliance with the mentioned rules is a violation of the US copyright law and may result in civil liability and criminal prosecution.**

You may use Vikisews patterns for commercial use, to sew custom-made garments and/or create fashion collections, on the condition that the patterns are solely used in a manufacturing setting and are not further shared with individuals.

TOTAL EASE ALLOWANCE

	Bust ease (estimated)	Waistline ease	Hipline ease	Upper arm ease (estimated)
cm	49.5–44.4	70.3–66.9	44.4–40.6	32.1–33.5
inches	19 1/2–17 1/2	27 5/8–26 3/8	17 1/2–16	12 5/8–13 1/4

GARMENT LENGTH, SLEEVE LENGTH

Height, cm	Back length, cm	Sleeve length including shoulder width and cuff, cm
1 (154–160)	61–64.2	70.8–71.3
2 (162–168)	64–67.2	73.6–74.2
3 (170–176)	67–70.2	76.5–77.1
4 (178–184)	70–73.2	79.4–80

Height, ft	Back length, in	Sleeve length including shoulder width and cuff, in
1 (5'1"–5'3")	24–25 1/4	27 7/8–28 1/8
2 (5'4"–5'6")	25 1/4–26 1/2	29–29 1/4
3 (5'7"–5'9")	26 3/8–27 5/8	30 1/8–30 3/8
4 (5'10"–6'1")	27 1/2–28 7/8	31 1/4–31 1/2

SUGGESTED FABRICS

To sew this jacket, choose medium-weight, pliable, soft, non-stretch outerwear fabrics made of natural, artificial, blended, or synthetic fibers.

The following fabrics are recommended: gabardine, denim, dewspo, outerwear fabric, raincoat fabric, taslan, and cotton.

For the lining, we recommend using lining fabrics made of artificial, blended, or synthetic fibers.

The jacket in the photo is made of outerwear fabric. The fabric is medium-weight, pliable, soft, and non-stretch. The fiber content is 100% polyamide. The fabric weight is 150 g/m².

The lining is made of 45% viscose + 55% polyester. The lining fabric weight is 100 g/m².

FABRIC AND NOTIONS REQUIREMENTS

1. Main fabric, 140 cm wide, with a directional print/nap, in meters:

Height, cm	Size				
	XS	S	M	L	XL
1 (154–160)	1.95	2	2.05	2.2	2.25
2 (162–168)	2.05	2.1	2.15	2.3	2.3
3 (170–176)	2.15	2.15	2.2	2.35	2.4
4 (178–184)	2.2	2.25	2.3	2.45	2.5

Main fabric, 55" wide, with a directional print/nap, in yards:

Height, ft	Size				
	XS	S	M	L	XL
1 (5'1"–5'3")	2 1/8	2 1/8	2 1/4	2 3/8	2 1/2
2 (5'4"–5'6")	2 1/4	2 1/4	2 3/8	2 1/2	2 1/2
3 (5'7"–5'9")	2 3/8	2 3/8	2 3/8	2 5/8	2 5/8
4 (5'10"–6'1")	2 3/8	2 1/2	2 1/2	2 5/8	2 3/4

2. Lining fabric, 140 cm wide, with a directional print, in meters:

Height, cm	Size				
	XS	S	M	L	XL
1 (154–160)	1.4	1.45	1.55	1.6	1.65
2 (162–168)	1.55	1.65	1.65	1.7	1.75
3 (170–176)	1.7	1.7	1.75	1.8	1.85
4 (178–184)	1.75	1.8	1.85	1.85	1.9

Lining fabric, 55" wide, with a directional print, in yards:

Height, ft	Size				
	XS	S	M	L	XL
1 (5'1"–5'3")	1 1/2	1 5/8	1 3/4	1 3/4	1 3/4
2 (5'4"–5'6")	1 3/4	1 3/4	1 3/4	1 7/8	1 7/8
3 (5'7"–5'9")	1 7/8	1 7/8	1 7/8	2	2
4 (5'10"–6'1")	1 7/8	2	2	2	2 1/8

IMPORTANT! When purchasing fabric, please account for shrinkage and buy 5% more than required.

3. Ten S-spring set-in snaps (+1–2 spare), 12.5 mm (1/2") in diameter.
4. Four grommets, 5 mm (1/4") in diameter.
5. Elastic cord, 3–5 mm (1/8–1/4") in diameter, for all heights. Total cord length for the casing, including seam allowances:

Size	XS	S	M	L	XL
meters	1.45	1.55	1.6	1.65	1.75
yards	1 5/8	1 3/4	1 3/4	1 3/4	1 7/8

6. Two double-hole cord stoppers for the elastic cord.
7. Matching thread — 2 spools.
8. Matching topstitching thread — 2 spools.

TOOLS AND EQUIPMENT

- sewing machine for construction
- stitch-in-the-ditch foot (optional)
- elastic threader (may be replaced with a safety pin)
- hole puncher or awl
- press tool and molds for installing grommets and snaps

PATTERN PIECES LIST

1. Из основного материала:

- front — cut 2
- back — cut 2
- stand collar — cut 2
- cuff — cut 2
- welt — cut 2
- pocket facing — cut 2
- top pocket lining — cut 2
- casing — cut 2
- placket — cut 2
- front facing — cut 2

Additionally, cut the following from the main fabric:

- four 2×2 cm ($3/4 \times 3/4$ ") squares to reinforce the grommet areas on the front pieces

2. From lining fabric:

- front lining — cut 2
- back lining — cut 2
- bottom pocket lining — cut 2

IMPORTANT! Don't forget to transfer all pattern markings and notches onto the fabric.

SEAM ALLOWANCES


All pattern pieces include seam allowances as follows:

- garment hem allowance — 3.5 cm (1 3/8")
- pocket lining curved edges — 1.5 cm (5/8")
- all other edges — 1 cm (3/8")


Take this into account when laying out the pattern pieces on the fabric.

CUTTING LAYOUT


Main fabric, 140 cm (55") wide, with a directional print/nap, cut on a single layer, for sizes XS-M in all heights

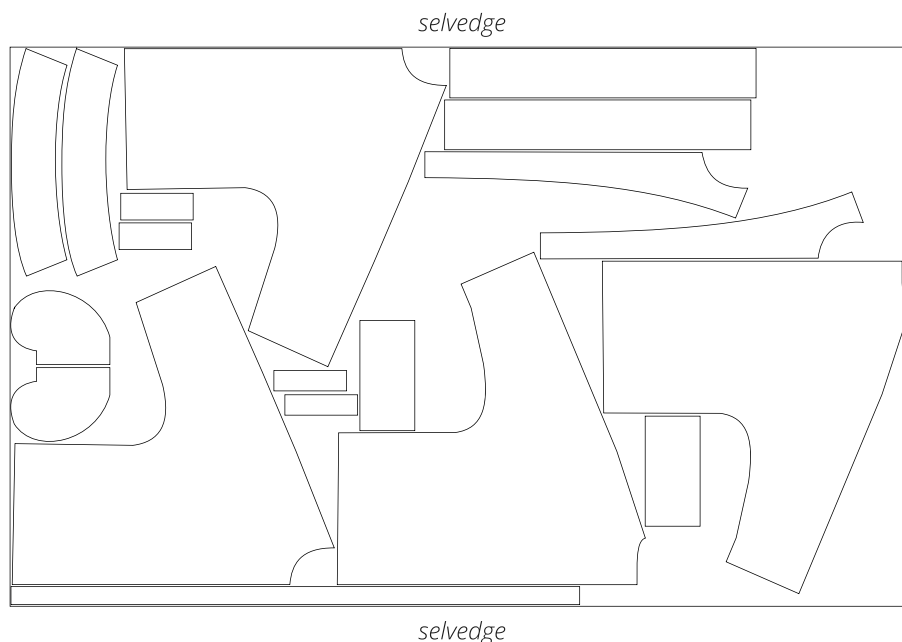

Main fabric, 140 cm (55") wide, with a directional print/nap, cut on a single layer,
for sizes L–XL in all heights

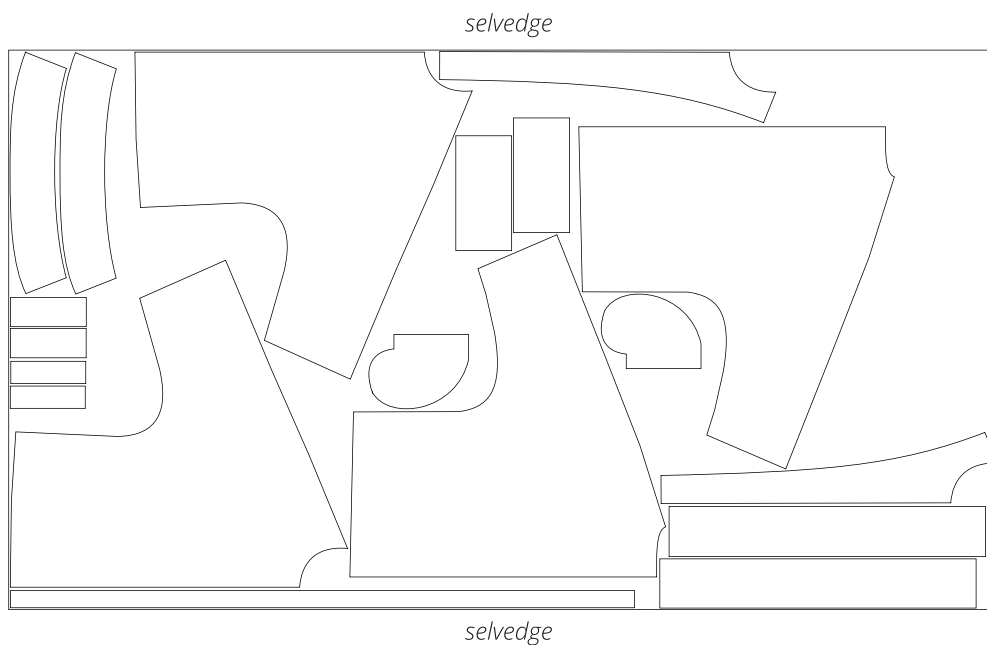

Lining fabric, 140 cm (55") wide, with a directional print, cut on a single layer,
for all sizes in all heights

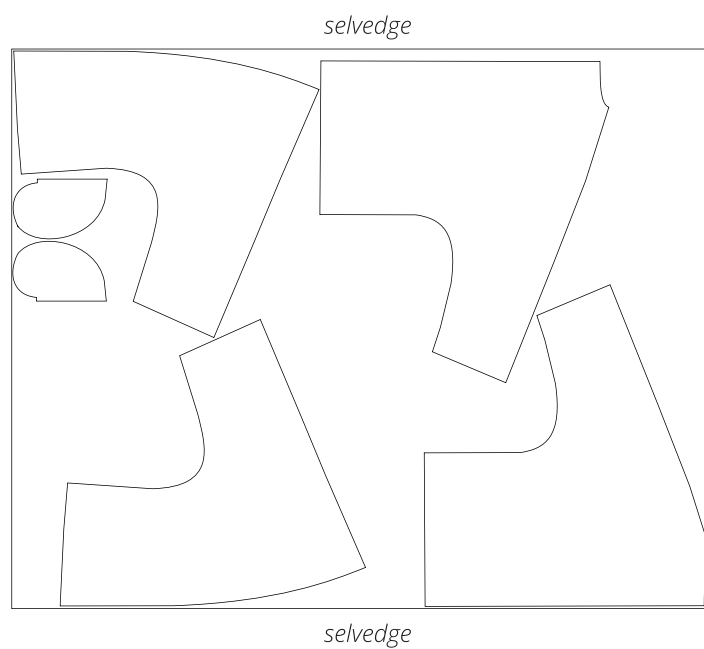

READY? LET'S GET SEWING!



19. Press the pocket.




20. Place the back pieces right sides together, align the center back edges, match the notches, and pin.



21. Machine-stitch, backstitching at the beginning and end of the seam.



22. Press the center back seam allowances towards the right back piece.

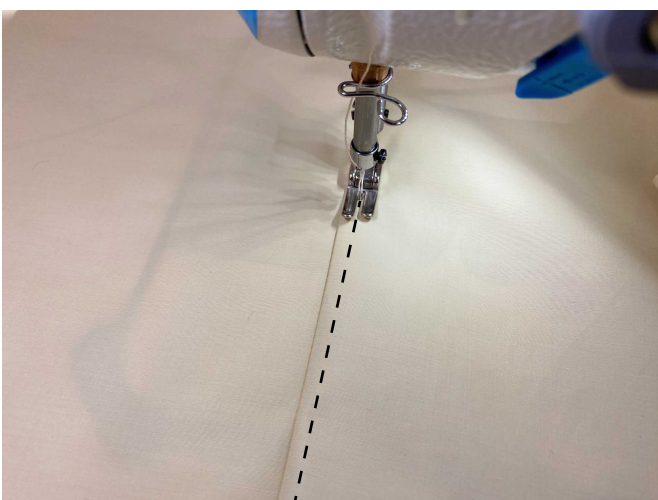

23. Working on the right side of the right back piece, topstitch at 5–7 mm (1/4") from the center back seam, securing the seam allowances. Use a 4 mm stitch length.