

Viki
S E W S

JACKET
VILASA



SIZES
34-52

DIFFICULTY



ADVANCED



FROM THE FOUNDER OF THE VIKISEWS® BRAND



Back in 2016, when I started making my first sewing patterns and instruction manuals, my main goal was to solve the problems I personally faced at the beginning of my sewing journey: the lack of stylish patterns that provide a great fit and contain clear sewing instructions. That's how Vikisews was born—a brand designed to help you create fashionable, on-trend clothing with your own hands.



The sewing instructions we create is the result of our team's careful, meticulous work. May they help you develop your sewing hobby—or even turn it into your life's work! Enjoy every step of the sewing process and create a thoughtful, stylish wardrobe!

If you have any questions, we're always here to help: info@vikisews.com



VILASA PATTERN DESCRIPTION

Vilasa is a close-fitting lined jacket with an accentuated waist and a waist seam. The top part is fitted with princess seams on the front and back, and the bottom part features inverted pleats. The neckline is round and features no collar. The jacket closes at the center front with sew-on snaps. The long set-in sleeves are made up of three pieces and shaped, voluminous at the shoulder and tapering towards the wrist. Vilasa is hip-length.



PLEASE READ BEFORE USE

The contents of this pattern are copyright protected and belong exclusively to Vikisews. You may use Vikisews patterns for personal use. It is prohibited to share Vikisews patterns and instructions with third parties, as well as to publish patterns and instructions online for public access. **Non-compliance with the mentioned rules is a violation of the US copyright law and may result in civil liability and criminal prosecution.**

You may use Vikisews patterns for commercial use, to sew custom-made garments and/or create fashion collections, on the condition that the patterns are solely used in a manufacturing setting and are not further shared with individuals.

TOTAL EASE ALLOWANCE

	Bust ease	Waistline ease	Hipline ease (estimated)	Upper arm ease
cm	2.1–5.5	4.4–8.2	62.1–87.7	13.4–9.5
inches	7/8–2 1/8	1 3/4–3 1/4	24 1/2–34 1/2	5 1/4–3 3/4

GARMENT LENGTH, SLEEVE LENGTH

Height, cm	Garment length from waist down, cm	Sleeve length including shoulder width, cm
1 (154–160)	18.8–20.7	75.2–81.5
2 (162–168)	20–22.2	75.1–81.4
3 (170–176)	21.5–23.7	75.2–81.6
4 (178–184)	22.9–25.2	75.2–81.6

Height, ft	Garment length from waist down, in	Sleeve length including shoulder width, in
1 (5'1"–5'3")	7 3/8–8 1/8	29 5/8–32 1/8
2 (5'4"–5'6")	7 7/8–8 3/4	29 5/8–32
3 (5'7"–5'9")	8 1/2–9 3/8	29 5/8–32 1/8
4 (5'10"–6'1")	9–9 7/8	29 5/8–32 1/8

SUGGESTED FABRICS

To sew this jacket, choose medium-weight, soft, non-stretch coating fabrics made of natural, artificial, blended, or synthetic fibers.

The following fabrics are recommended: faux fur with knit or woven backing, napped coating fabrics, and bouclé.

For the lining, we recommend using lining fabrics made of artificial fibers (viscose), blended fibers (viscose + elastane, viscose + polyester), or synthetic fibers (polyester, polyester + elastane).

The jacket in the photo is made of faux fur with knit backing. The fabric is medium-weight, soft, and non-stretch. The fiber content is 100% polyester. The fabric weight is 450 g/m².

The lining is made of 55% viscose + 45% polyester. The lining fabric weight is 100 g/m².

FABRIC AND NOTIONS REQUIREMENTS

1. Main fabric, 140 cm wide, with a directional print/nap, in meters:

Height, cm	34	36	38	40	42	44-46	48	50-52
1 (154-160)	1.4	1.4	1.45	1.45	1.6	1.65	1.65	1.7
2 (162-168)	1.4	1.45	1.45	1.45	1.65	1.65	1.7	1.7
3 (170-176)	1.45	1.45	1.5	1.5	1.65	1.7	1.7	1.75
4 (178-184)	1.45	1.45	1.5	1.55	1.65	1.7	1.75	1.75

Main fabric, 55" wide, with a directional print/nap, in yards:

Height, ft	34	36	38	40	42	44-46	48	50-52
1 (5'1"-5'3")	1 1/2	1 1/2	1 5/8	1 5/8	1 3/4	1 3/4	1 3/4	1 7/8
2 (5'4"-5'6")	1 1/2	1 5/8	1 5/8	1 5/8	1 3/4	1 3/4	1 7/8	1 7/8
3 (5'7"-5'9")	1 5/8	1 5/8	1 5/8	1 5/8	1 3/4	1 7/8	1 7/8	1 7/8
4 (5'10"-6'1")	1 5/8	1 5/8	1 5/8	1 3/4	1 3/4	1 7/8	1 7/8	1 7/8

2. Lining fabric, 140 cm wide, with a directional print, in meters:

Height, cm	34	36	38	40	42	44	46	48-50	52
1 (154-160)	1.1	1.15	1.15	1.25	1.3	1.35	1.4	1.4	1.4
2 (162-168)	1.15	1.15	1.15	1.25	1.35	1.35	1.4	1.4	1.45
3 (170-176)	1.15	1.15	1.15	1.3	1.35	1.4	1.4	1.45	1.5
4 (178-184)	1.15	1.15	1.2	1.3	1.35	1.4	1.45	1.45	1.5

Lining fabric, 55" wide, with a directional print, in yards:

Height, ft	34-38	40	42	44	46	48-50	52
1 (5'1"-5'3")	1 1/4	1 3/8	1 3/8	1 1/2	1 1/2	1 1/2	1 1/2
2 (5'4"-5'6")	1 1/4	1 3/8	1 1/2	1 1/2	1 1/2	1 1/2	1 5/8
3 (5'7"-5'9")	1 1/4	1 3/8	1 1/2	1 1/2	1 1/2	1 5/8	1 5/8
4 (5'10"-6'1")	1 1/4	1 3/8	1 1/2	1 1/2	1 5/8	1 5/8	1 5/8

IMPORTANT! When purchasing fabric, please account for shrinkage and buy 5% more than required.

3. Lightweight interfacing, knit or woven, 140 cm wide, in meters:

Height, cm	34	36–44	46–50	52
1 (154–160)	0.65	0.7	0.7	0.7
2 (162–168)	0.7	0.7	0.75	0.75
3 (170–176)	0.7	0.75	0.75	0.8
4 (178–184)	0.75	0.75	0.8	0.8

Lightweight interfacing, knit or woven, 55" wide, in yards:

Height, ft	34	36–44	46–52
1 (5'1"–5'3")	3/4	3/4	3/4
2 (5'4"–5'6")	3/4	3/4	7/8
3 (5'7"–5'9")	3/4	7/8	7/8
4 (5'10"–6'1")	7/8	7/8	7/8

4. Stitched bias-cut fusible stay tape with stitch reinforcement, 1.5 cm (5/8") wide — 3–3.4 m (3 1/4–3 3/4 yd)

5. Four sew-on snaps, 2–2.2 cm (3/4–7/8") in diameter

6. Matching thread — 1 spool for the sewing machine

7. Matching thread for the lining fabric — 1 spool for the sewing machine

TOOLS AND EQUIPMENT

- sewing machine for construction
- stitch-in-the-ditch foot (optional)

PATTERN PIECES LIST

1. From main fabric:

- center front — cut 2
- side front — cut 2
- bottom front — cut 2
- center back — cut 1 on fold
- side back — cut 2
- bottom back — cut 1 on fold
- front sleeve — cut 2
- back sleeve — cut 2
- bottom sleeve — cut 2
- front facing — cut 2
- back neck facing — cut 1

2. From lining fabric:

- front lining — cut 2
- bottom front lining — cut 2
- back lining — cut 1 on fold
- bottom back lining — cut 1 on fold
- front sleeve lining — cut 2
- back sleeve lining — cut 2
- bottom sleeve lining — cut 2

3. From interfacing:

- front facing — cut 2
- back neck facing — cut 1

Additionally, cut the following from interfacing:

- one strip, width and length according to the pattern, to interface the front edge on the left center front piece

***IMPORTANT!** Don't forget to transfer all pattern markings and notches onto the fabric.*

SEAM ALLOWANCES


All pattern pieces include seam allowances as follows:

- garment hem allowance — 2 cm (3/4")
- sleeve hem allowance — 4 cm (1 5/8")
- all other edges — 1 cm (3/8")

Take this into account when laying out the pattern pieces on the fabric.


CUTTING LAYOUT

Main fabric, 140 cm (55") wide, with a directional print/nap, cut on fold, for sizes 34–40 in all heights

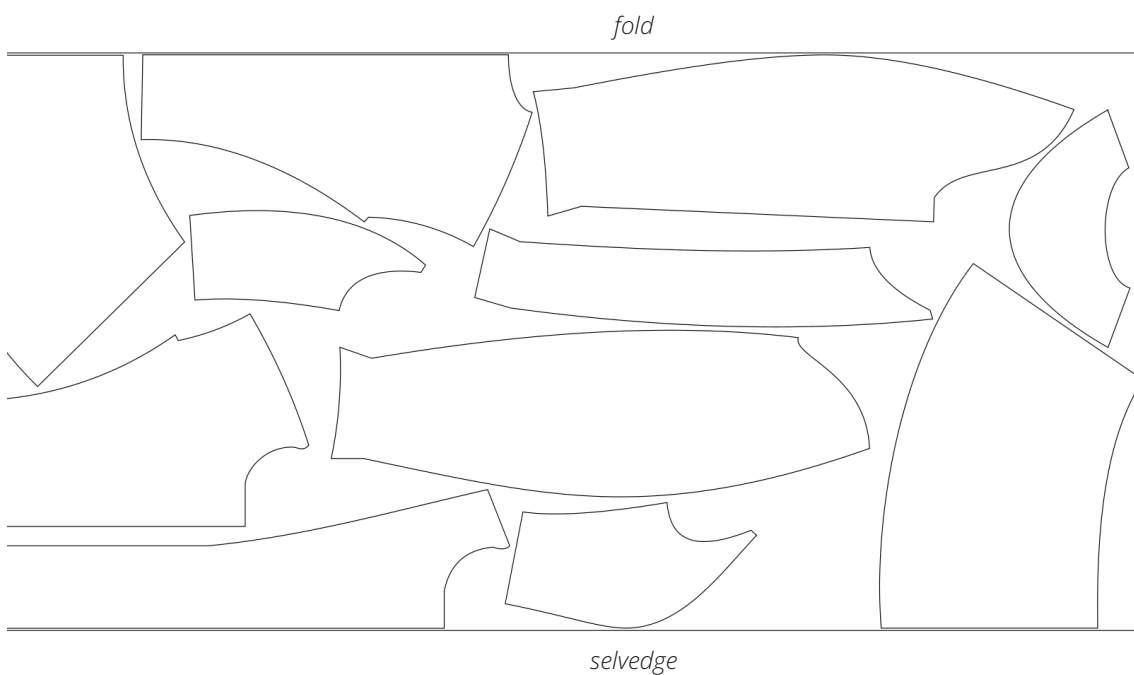

Attention! Cut only one back neck facing piece.

Main fabric, 140 cm (55") wide, with a directional print/nap, cut on fold, for sizes 42–52 in all heights

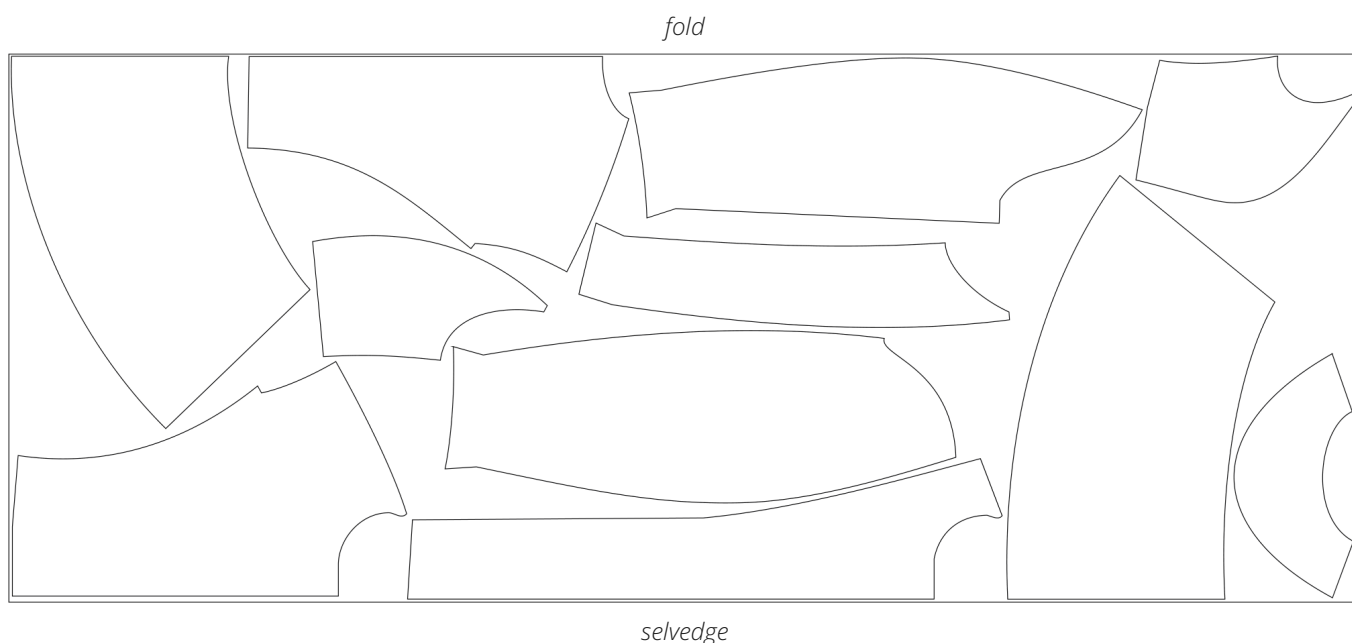


Attention! Cut only one back neck facing piece.


Lining fabric, 140 cm (55") wide, with a directional print, cut on fold, for sizes 34–38 in all heights




Lining fabric, 140 cm (55") wide, with a directional print, cut on fold, for sizes 40–42 in all heights

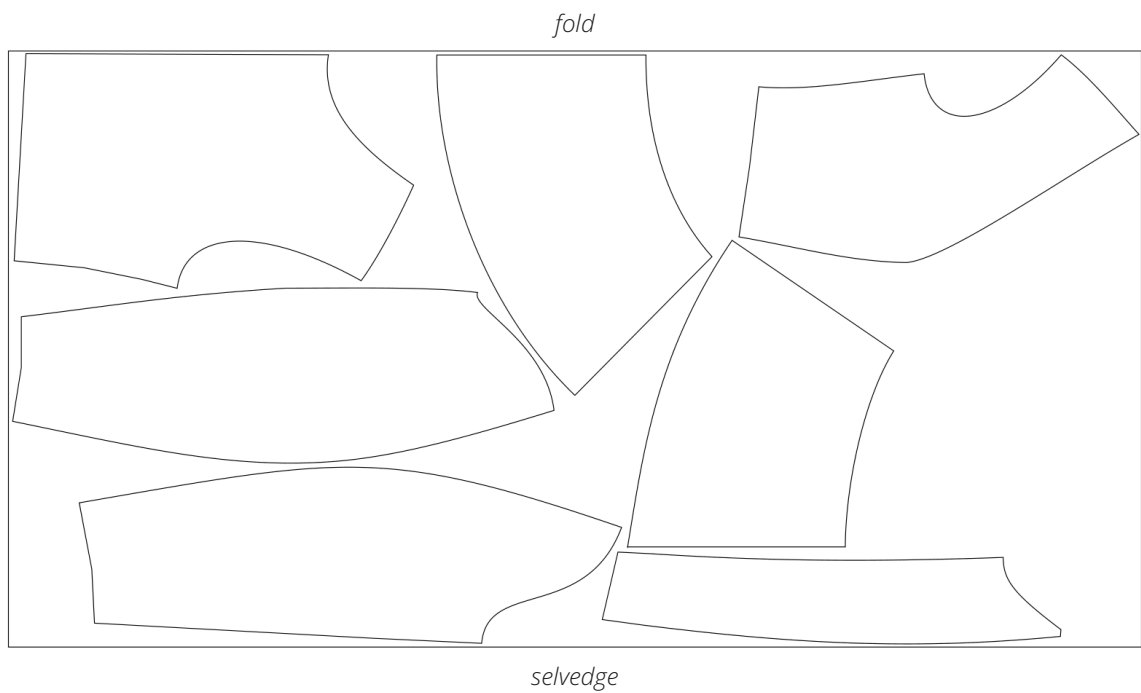

Lining fabric, 140 cm (55") wide, with a directional print, cut on fold, for sizes 44–52 in all heights

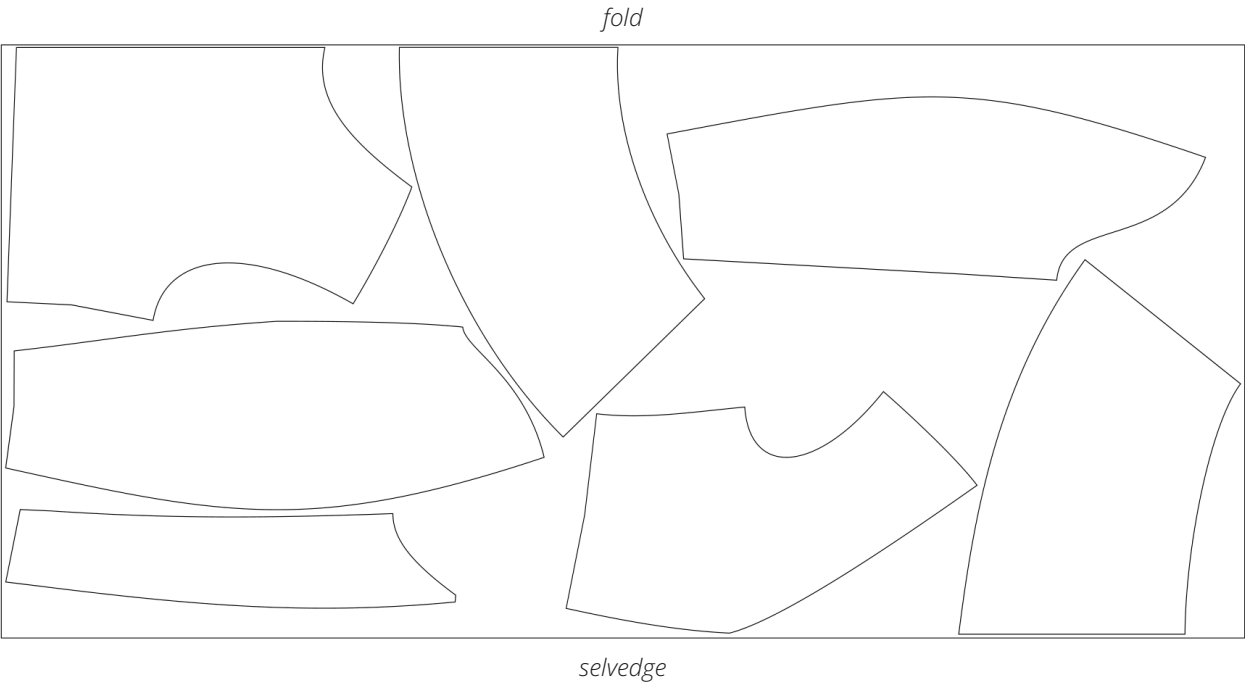

Interfacing, 140 cm (55") wide, cut in one direction on a partial fold, for all sizes in all heights

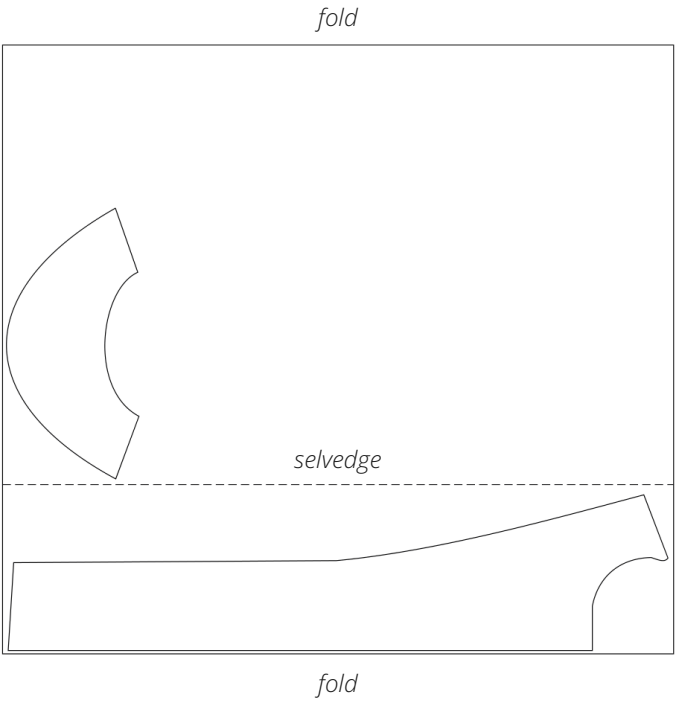

READY? LET’S GET SEWING!



11. Form the inverted box pleats on the bottom front and bottom back pieces according to the pattern markings, and pin.



12. Machine-stitch the pleats in place at 5–7 mm (1/4") from the waist edge.



13. Place the top and bottom sections of the garment right sides together, align the waist edges, match the notches and seams, and pin.