


Viki

S E W S

TROUSERS

ELANOR

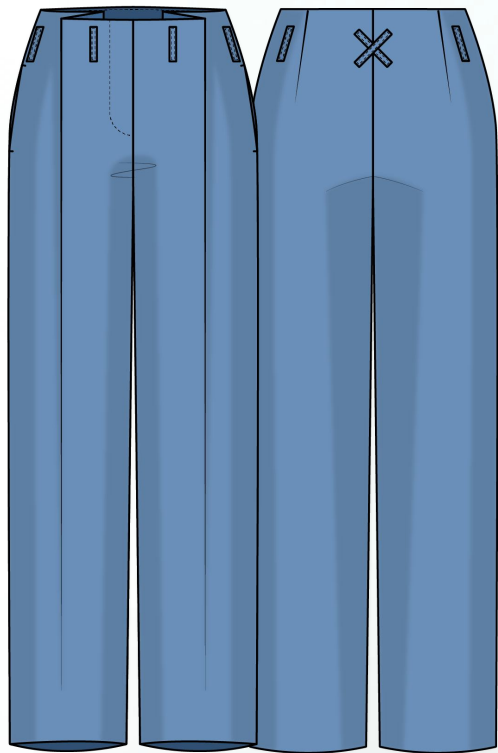

SIZES

34-52

DIFFICULTY



INTERMEDIATE



FROM THE FOUNDER OF THE VIKISEWS® BRAND




Back in 2016, when I started making my first sewing patterns and instruction manuals, my main goal was to solve the problems I personally faced at the beginning of my sewing journey: the lack of stylish patterns that provide a great fit and contain clear sewing instructions. That's how Vikisews was born—a brand designed to help you create fashionable, on-trend clothing with your own hands.



The sewing instructions we create is the result of our team's careful, meticulous work. May they help you develop your sewing hobby—or even turn it into your life's work! Enjoy every step of the sewing process and create a thoughtful, stylish wardrobe!

If you have any questions, we're always here to help: info@vikisews.com

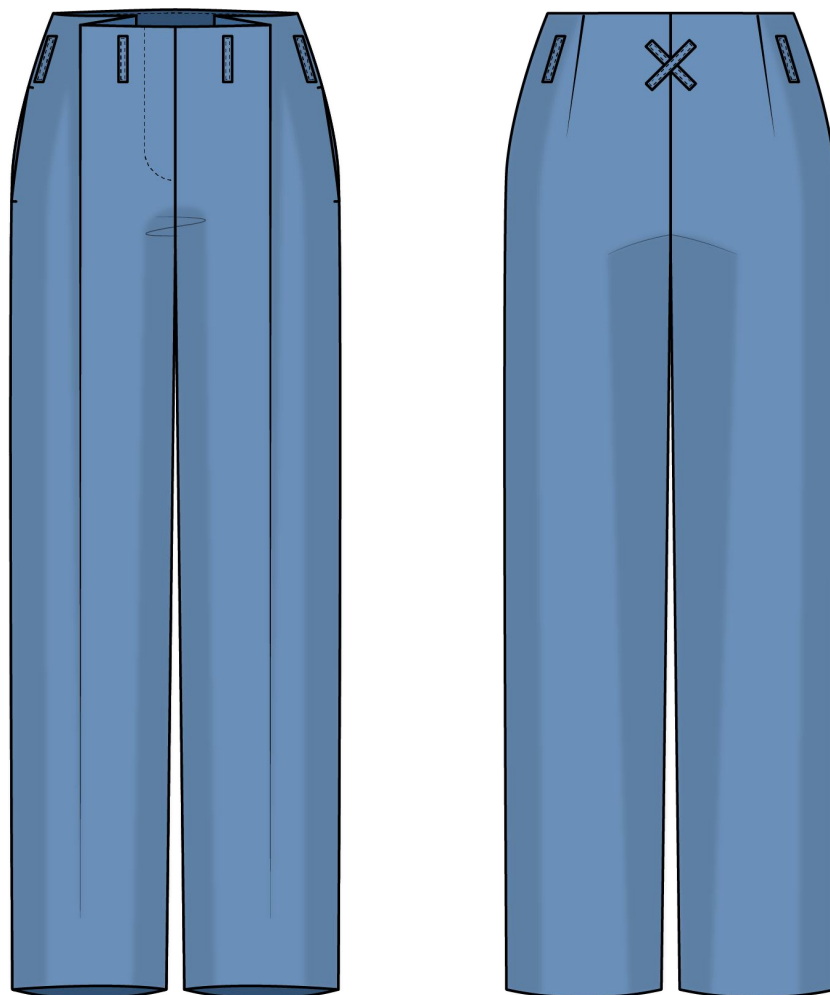

ELANOR PATTERN DESCRIPTION

Elanor is a pair of semi-fitted trousers with a straight silhouette. The front leg pieces feature pleats that flow into pressed creases, and the back leg pieces have waist darts. There are pockets in the side seams. The trousers have no waistband, and the waist is finished with a facing. The front and back leg pieces have topstitched belt loops sitting 2.5 cm (1") below the top edge. The trousers close with a fly front zipper and a hook-and-eye closure, and sit 6 cm (2 3/8") below the natural waistline. The trousers are below-ankle length.



PLEASE READ BEFORE USE

The contents of this pattern are copyright protected and belong exclusively to Vikisews. You may use Vikisews patterns for personal use. It is prohibited to share Vikisews patterns and instructions with third parties, as well as to publish patterns and instructions online for public access. **Non-compliance with the mentioned rules is a violation of the US copyright law and may result in civil liability and criminal prosecution.**

You may use Vikisews patterns for commercial use, to sew custom-made garments and/or create fashion collections, on the condition that the patterns are solely used in a manufacturing setting and are not further shared with individuals.

TOTAL EASE ALLOWANCE

	Waistline ease (estimated)	Hipline ease
cm	8.7–9.1	24.4–30.5
inches	3 3/8–3 5/8	9 5/8–12

GARMENT LENGTH

Height, cm	Side seam length, cm	Finished hem width, cm
1 (154–160)	104.3–105.9	27.9–33.3
2 (162–168)	108.5–110.2	27.9–33.3
3 (170–176)	112.8–114.5	27.9–33.3
4 (178–184)	117.1–118.8	27.9–33.3

Height, ft	Side seam length, in	Finished hem width, in
1 (5'1"–5'3")	41 1/8–41 3/4	11–13 1/8
2 (5'4"–5'6")	42 3/4–43 3/8	11–13 1/8
3 (5'7"–5'9")	44 3/8–45 1/8	11–13 1/8
4 (5'10"–6'1")	46 1/8–46 3/4	11–13 1/8

SUGGESTED FABRICS

To sew these trousers, choose suiting fabrics with the following properties: medium-weight, soft, non-stretch or low-stretch. The fiber content can include natural, artificial, blended, or synthetic fibers.

The following fabrics are recommended: wool suiting, linen, and polyviscose.

For the lining, we recommend using lining fabrics made of artificial, blended, or synthetic fibers.

The trousers in the photo are made of suiting fabric. The fabric is medium weight, soft, and low-stretch. The fiber content is 89% wool + 9% polyamide + 2% elastane. The fabric weight is 235 g/m².

The lining fabric is made of 45% viscose + 55% polyester. The lining fabric weight is 100 g/m².

FABRIC AND NOTIONS REQUIREMENTS

1. Main fabric, 140 cm wide, with a directional print/nap, in meters:

Height, cm	Size					
	34–38	40	42	44	46–50	52
1 (154–160)	1.95	2	2.1	2.25	2.25	2.3
2 (162–168)	2.05	2.1	2.2	2.35	2.35	2.35
3 (170–176)	2.15	2.15	2.3	2.4	2.45	2.45
4 (178–184)	2.2	2.25	2.35	2.5	2.5	2.55

Main fabric, 55" wide, with a directional print/nap, in yards:

Height, ft	Size			
	34–38	40	42	44–52
1 (5'1"–5'3")	2 1/8	2 1/8	2 1/4	2 1/2
2 (5'4"–5'6")	2 1/4	2 1/4	2 3/8	2 5/8
3 (5'7"–5'9")	2 3/8	2 3/8	2 1/2	2 5/8
4 (5'10"–6'1")	2 3/8	2 1/2	2 5/8	2 3/4

IMPORTANT! When purchasing fabric, please account for shrinkage and buy 5% more than required.

2. Lining fabric, 140 cm (55") wide, with a directional print, for all sizes in all heights — 30 cm (11 3/4").
3. Lightweight interfacing, knit or woven, 140 cm (55") wide, for all sizes in all heights — 30 cm (11 3/4").
4. Stitched bias-cut fusible stay tape with stitch reinforcement, 1.5 cm (5/8") wide — 1.63 m (1 3/4 yd).
5. Stitched straight-grain fusible stay tape, 1 cm (3/8") wide — 0.6 m (5/8 yd).
6. One trouser zipper, 25 cm (10") long, for all sizes in all heights.
7. One hook-and-eye closure.
8. Matching thread — 5 spools (1 spool for the sewing machine + 4 spools for the overlocker).

TOOLS AND EQUIPMENT

- sewing machine for construction
- overlocker for finishing raw edges. This may be replaced with a stretch overlock stitch or a zigzag stitch on the sewing machine (overlock or zigzag stitch width 2–3 mm, stitch length 2.5 mm)
- one-sided foot for attaching the zipper

PATTERN PIECES LIST

1. From main fabric:

- front leg — cut 2
- back leg — cut 2
- right front facing — cut 1
- left front facing — cut 1
- back facing — cut 1 on fold
- belt loop — cut 1 (8 pieces)
- pocket lining — cut 2

2. From lining fabric:

- pocket lining — cut 2

IMPORTANT! Don't forget to transfer all pattern markings and notches onto the fabric.

3. From interfacing:

- right front facing — cut 1
- left front facing — cut 1
- back facing — cut 1 on fold

IMPORTANT! If the pattern pieces have the inscription "face," these pieces should be cut on the right side of the fabric.

SEAM ALLOWANCES


All pattern pieces include seam allowances as follows:

- garment hem allowance — 4 cm (1 5/8")
- all other edges — 1 cm (3/8")

Take this into account when laying out the pattern pieces on the fabric.


CUTTING LAYOUT

Main fabric, 140 cm (55") wide, with a directional print/nap, cut on fold,
for sizes 34–42 in all heights

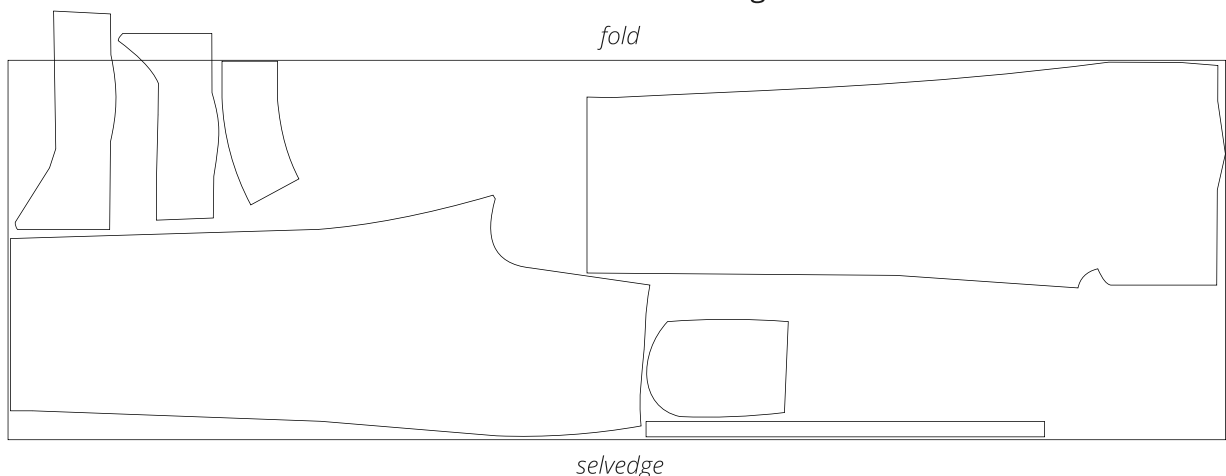


Attention! Cut one each of the left front facing and right front facing pieces on a single layer out of the leftover fabric. Cut only one belt loop piece.

Main fabric, 140 cm (55") wide, with a directional print/nap, cut on fold, for sizes 44–52 in all heights

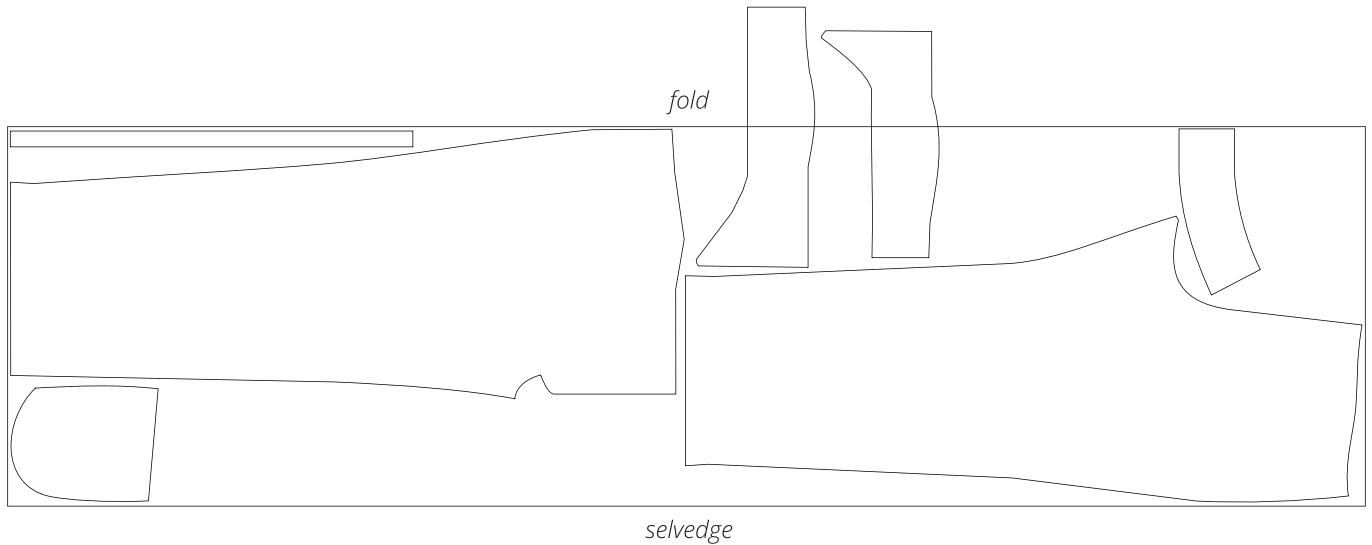


Attention! Cut one each of the left front facing and right front facing pieces on a single layer out of the leftover fabric. Cut only one belt loop piece.

Lining fabric, 140 cm (55") wide, with a directional print, cut on fold, for all sizes in all heights

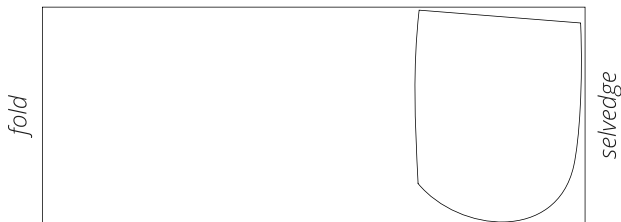


Interfacing, 140 cm (55") wide, cut on a single layer, for all sizes in all heights

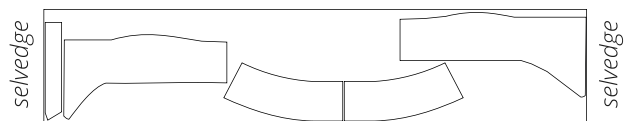

READY? LET'S GET SEWING!




11. Overlock the seam allowances, with either side facing up.
Press the seam.

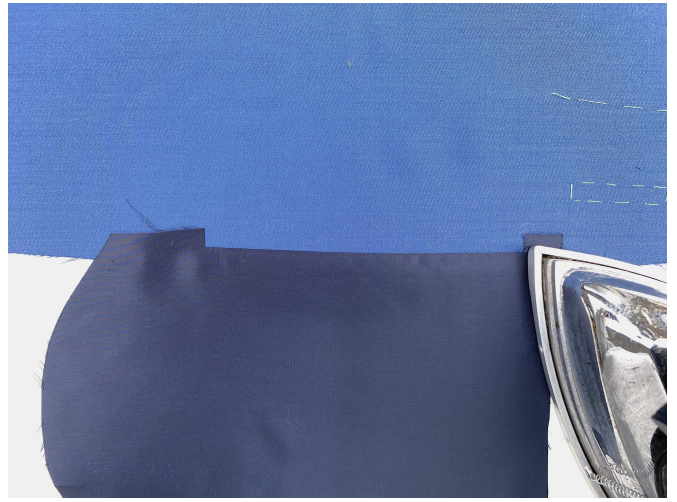


12. Press the seam allowances towards the pocket lining.



13. Turn the pocket lining to the wrong side of the front leg piece.
Press the pocket opening right on the edge.

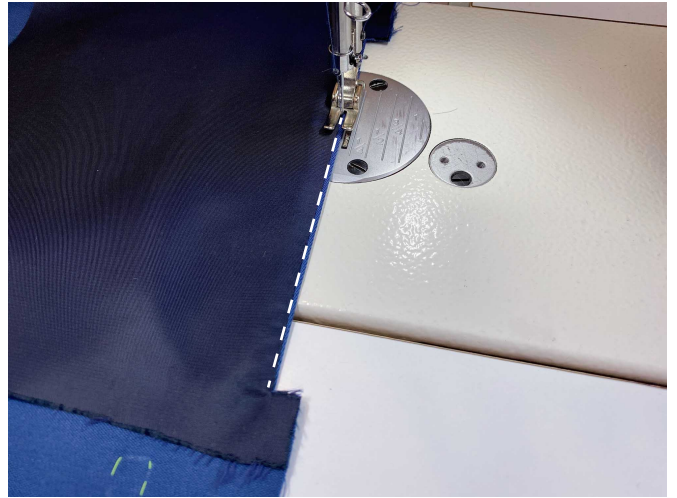

14. Working on the wrong side of the front leg piece, topstitch along the pocket opening at 2 mm from the edge.
Backstitch at the beginning and end of the seam.

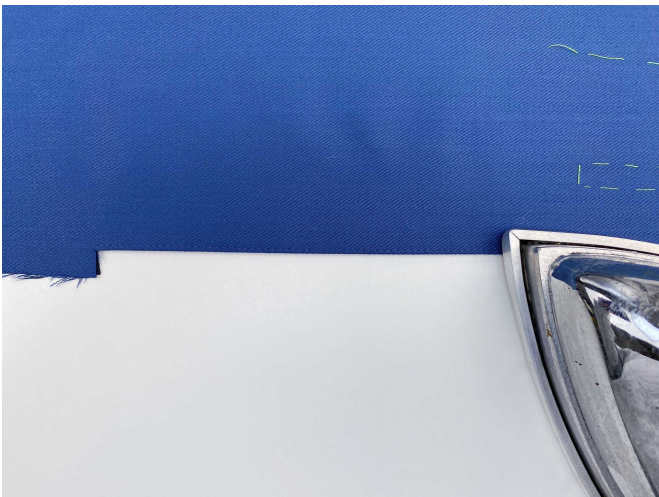

15. Press the pocket opening.