

FROM THE FOUNDER OF VIKISEWS®




In 2016, when I was creating my first patterns and instructions, I simply wanted to solve the difficulties I had faced myself at the start of my sewing journey. I missed stylish patterns with a good fit and clear sewing instructions. Step by step, this is how Vikisews came about — a brand that helps people who sew beautiful, up-to-date clothes with their own hands.



Every one of our instructions is the result of careful teamwork. We hope they help your hobby grow — and perhaps even turn it into your life's work. Enjoy the process and create a thoughtful, stylish wardrobe.

If you have any questions, email us at info@vikisews.com

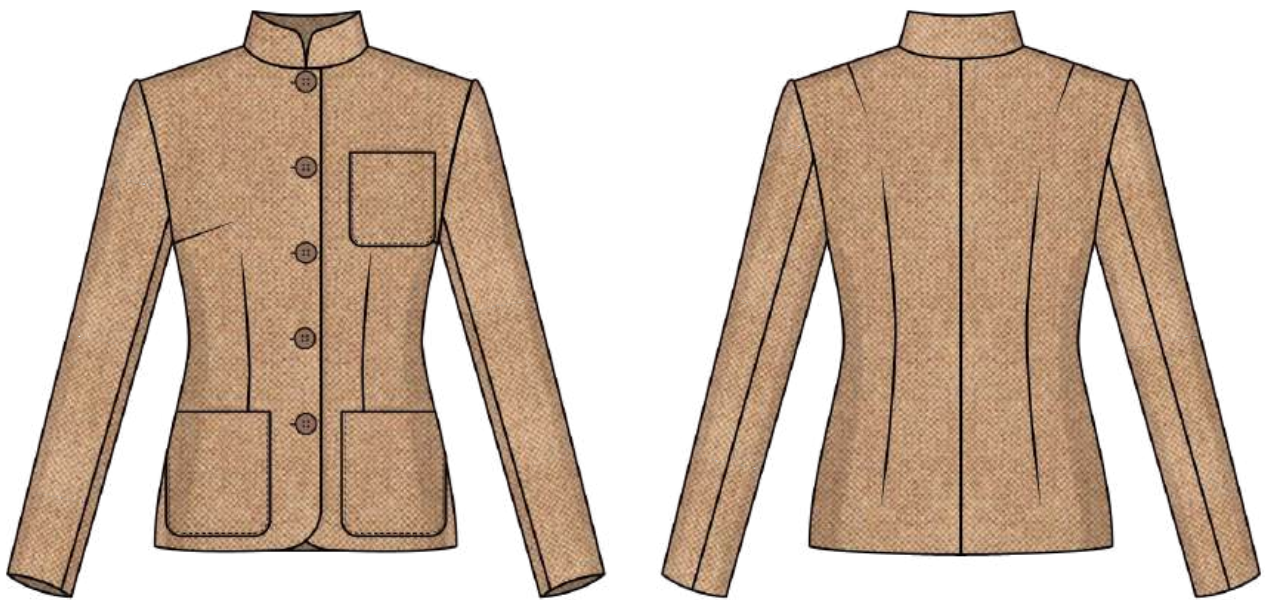

SHELBY PATTERN DESCRIPTION

Shelby is a semi-fitted lined jacket. The front is shaped with waist and bust darts, and the back is shaped with waist darts and a center seam. The fronts feature patch pockets. The long set-in sleeves are made up of two pieces. The jacket has a stand collar and a center front closure with buttons and buttonholes. The bottom edge of the front is rounded. Shelby is below-hip length.



PLEASE READ BEFORE USE

The contents of this pattern are copyright protected and belong exclusively to Vikisews. You may use Vikisews patterns for personal use. It is prohibited to share Vikisews patterns and instructions with third parties, as well as to publish patterns and instructions online for public access. **Non-compliance with the mentioned rules is a violation of the US copyright law and may result in civil liability and criminal prosecution.**

You may use Vikisews patterns for commercial use, to sew custom-made garments and/or create fashion collections, on the condition that the patterns are solely used in a manufacturing setting and are not further shared with individuals.

TOTAL EASE ALLOWANCE

	Bust ease	Waistline ease	Hipline ease	Upper arm ease
cm	5.7–7.6	11.8–14.2	5.9–9.4	6.4–4.8
inches	2 1/4–3	4 5/8–5 5/8	2 3/8–3 3/4	2 1/2–1 7/8

GARMENT LENGTH, SLEEVE LENGTH

Height, cm	Center back length, cm	Sleeve length, cm
1 (154–160)	58.2–60.5	58.6–60.5
2 (162–168)	61.2–63.5	60.5–62.4
3 (170–176)	64.2–66.5	62.3–64.2
4 (178–184)	67.2–69.5	64.3–66.1

Height, ft	Center back length, in	Sleeve length, in
1 (5'1"–5'3")	22 7/8–23 7/8	23 1/8–23 7/8
2 (5'4"–5'6")	24 1/8–25	23 7/8–24 5/8
3 (5'7"–5'9")	25 1/4–26 1/8	24 1/2–25 1/4
4 (5'10"–6'1")	26 1/2–27 3/8	25 3/8–26

SUGGESTED FABRIC

To sew this jacket, choose soft, non-stretch or low-stretch suiting fabrics made of natural, artificial, blended, or synthetic fibers.

The following fabrics are recommended: wool suiting, polyviscose, and tweed.

For the lining, we recommend using lining fabrics made of artificial, blended, or synthetic fibers.

The jacket in the photo is made of suiting fabric. The fabric is soft, low stretch, and pliable. The fiber content is 100% wool. The fabric weight is 270 g/m².

The lining is made of 55% viscose + 45% polyester. The lining fabric weight is 100 g/m².

FABRIC AND NOTIONS REQUIREMENTS

IMPORTANT! When purchasing fabric, please account for shrinkage and buy 5% more than required.

1. Main fabric, 140 cm wide, with a directional print/nap, in meters:

Height, cm	Size									
	34	36	38	40	42	44	46	48	50	52
1 (154–160)	1.3	1.3	1.3	1.4	1.4	1.4	1.45	1.45	1.6	1.65
2 (162–168)	1.35	1.35	1.35	1.45	1.45	1.45	1.5	1.55	1.65	1.65
3 (170–176)	1.4	1.4	1.4	1.5	1.5	1.5	1.55	1.65	1.7	1.75
4 (178–184)	1.45	1.45	1.5	1.55	1.55	1.55	1.6	1.7	1.75	1.8

Main fabric, 55" wide, with a directional print/nap, in yards:

Height, ft	Size					
	34–38	40–44	46	48	50	52
1 (5'1"–5'3")	1 3/8	1 1/2	1 5/8	1 5/8	1 3/4	1 3/4
2 (5'4"–5'6")	1 1/2	1 5/8	1 5/8	1 3/4	1 3/4	1 3/4
3 (5'7"–5'9")	1 1/2	1 5/8	1 3/4	1 3/4	1 7/8	1 7/8
4 (5'10"–6'1")	1 5/8	1 3/4	1 3/4	1 7/8	1 7/8	2

2. Lining fabric, 140 cm wide, with a directional print (all pieces from one fabric), in meters:

Height, cm	Size									
	34	36	38	40	42	44	46	48	50	52
1 (154–160)	1.1	1.15	1.15	1.2	1.2	1.2	1.25	1.25	1.3	1.3
2 (162–168)	1.15	1.15	1.2	1.25	1.25	1.25	1.3	1.3	1.35	1.35
3 (170–176)	1.2	1.2	1.25	1.25	1.25	1.3	1.3	1.35	1.4	1.4
4 (178–184)	1.25	1.25	1.3	1.3	1.3	1.35	1.35	1.4	1.4	1.45

Lining fabric, 55" wide, with a directional print (all pieces from one fabric), in yards:

Height, ft	Size							
	34–36	38	40–42	44	46	48	50	52
1 (5'1"–5'3")	1 1/4	1 1/4	1 1/4	1 1/4	1 3/8	1 3/8	1 3/8	1 3/8
2 (5'4"–5'6")	1 1/4	1 1/4	1 3/8	1 3/8	1 3/8	1 3/8	1 1/2	1 1/2
3 (5'7"–5'9")	1 1/4	1 3/8	1 3/8	1 3/8	1 3/8	1 1/2	1 1/2	1 1/2
4 (5'10"–6'1")	1 3/8	1 3/8	1 3/8	1 1/2	1 1/2	1 1/2	1 1/2	1 5/8

3. Lining fabric, 140 cm wide, with a directional print (without the top sleeve lining and bottom sleeve lining pieces), in meters:

Height, cm	Size						
	34-40	42	44	46	48	50	52
1 (154-160)	0.65	0.7	0.7	0.7	0.75	0.75	0.8
2 (162-168)	0.7	0.75	0.75	0.75	0.8	0.8	0.8
3 (170-176)	0.7	0.75	0.75	0.8	0.8	0.85	0.85
4 (178-184)	0.75	0.8	0.8	0.8	0.85	0.85	0.9

Lining fabric, 55" wide, with a directional print (without the top sleeve lining and bottom sleeve lining pieces), in yards:

Height, ft	Size			
	34-40	42-46	48-50	52
1 (5'1"-5'3")	3/4	3/4	7/8	7/8
2 (5'4"-5'6")	3/4	7/8	7/8	7/8
3 (5'7"-5'9")	3/4	7/8	7/8	7/8
4 (5'10"-6'1")	7/8	7/8	7/8	1

4. Lining fabric, 140 cm wide, with a directional print (for the top sleeve lining and bottom sleeve lining pieces), in meters:

Height, cm	Size	
	34-40	42-52
1 (154-160)	0.65	0.65
2 (162-168)	0.65	0.65
3 (170-176)	0.65	0.7
4 (178-184)	0.7	0.7

Lining fabric, 55" wide, with a directional print (for the top sleeve lining and bottom sleeve lining pieces), in yards:

Height, ft	Size
	34-52
1 (5'1"-5'3")	3/4
2 (5'4"-5'6")	3/4
3 (5'7"-5'9")	3/4
4 (5'10"-6'1")	3/4

5. Lightweight interfacing, knit or woven, 140 cm wide, cut in one direction, in meters:

Height, cm	Size									
	34	36	38	40	42	44	46	48	50	52
1 (154–160)	0.9	0.9	0.95	0.95	1	1.1	1.15	1.15	1.4	1.4
2 (162–168)	0.95	0.95	1	1	1.05	1.2	1.2	1.25	1.45	1.45
3 (170–176)	1	1	1	1	1.1	1.25	1.25	1.3	1.5	1.5
4 (178–184)	1	1	1.05	1.05	1.15	1.3	1.3	1.35	1.55	1.55

Lightweight interfacing, knit or woven, 55" wide, cut in one direction, in yards:

Height, ft	Size					
	34–36	38–40	42	44–46	48	50–52
1 (5'1"–5'3")	1	1	1 1/8	1 1/4	1 1/4	1 1/2
2 (5'4"–5'6")	1	1 1/8	1 1/8	1 1/4	1 3/8	1 5/8
3 (5'7"–5'9")	1 1/8	1 1/8	1 1/4	1 3/8	1 3/8	1 5/8
4 (5'10"–6'1")	1 1/8	1 1/8	1 1/4	1 3/8	1 1/2	1 3/4

6. Stitched bias-cut fusible stay tape with stitch reinforcement, 1.5 cm (5/8") wide — 1.8–2.2 m (2–2 3/8 yd)

7. Five buttons, 2.2 cm (7/8") in diameter

8. One pair of shoulder pads, 1.5 cm (5/8") tall

9. One pair of sleeve heads

10. Matching thread — 1 spool for the sewing machine

11. Matching thread for the lining fabric — 1 spool for the sewing machine

TOOLS AND EQUIPMENT

- sewing machine for construction
- buttonhole foot
- stitch-in-the-ditch foot (optional)

PATTERN PIECES LIST

1. From main fabric:

- front — 2 pieces
- back — 2 pieces
- top sleeve — 2 pieces
- bottom sleeve — 2 pieces
- stand collar — 2 pieces
- front facing — 2 pieces
- back neck facing — 1 piece on fold
- chest pocket — 1 piece
- side pocket — 2 pieces

2. From lining fabric:

- front lining — 2 pieces
- back lining — 2 pieces
- top sleeve lining — 2 pieces
- bottom sleeve lining — 2 pieces
- chest pocket lining — 1 piece
- side pocket lining — 2 pieces

IMPORTANT! Don't forget to transfer all pattern markings and notches onto the fabric.

3. From interfacing:

- front — 2 pieces
- back — 2 pieces
- stand collar — 2 pieces
- front facing — 2 pieces
- back neck facing — 1 piece on fold

Interface the following pieces partially:

- top sleeve — 2 pieces (interface the sleeve cap and hem sections marked on the pattern)
- bottom sleeve — 2 pieces (interface the sleeve cap and hem sections marked on the pattern)
- chest pocket — 1 piece (interface the section marked on the pattern)
- side pocket — 2 pieces (interface the section marked on the pattern)

IMPORTANT! If the pattern pieces have the inscription "face," these pieces should be cut on the right side of the fabric.

SEAM ALLOWANCES

All pattern pieces include seam allowances as follows:

- garment hem allowance — 4 cm (1 5/8")
- sleeve hem allowance — 4 cm (1 5/8")
- all other edges — 1 cm (3/8")

Take this into account when laying out the pattern pieces on the fabric.



1. Transfer the following to the wrong side of the front pieces from the pattern:

- the dart lines
- the center front line
- the buttonhole and button placement
- the pocket placement lines

2. Thread-trace the following with contrasting thread, using temporary hand stitches:

- the center front lines
- the buttonhole and button placement
- the pocket placement lines



3. Transfer the dart lines to the wrong side of the back pieces from the pattern.



4. Working on the wrong side of the front and back pieces, match the dart legs and pin.