

# FROM THE FOUNDER OF THE VIKISEWS® BRAND

---




Back in 2016, when I started making my first sewing patterns and instruction manuals, my main goal was to solve the problems I personally faced at the beginning of my sewing journey: the lack of stylish patterns that provide a great fit and contain clear sewing instructions. That's how Vikisews was born—a brand designed to help you create fashionable, on-trend clothing with your own hands.



The sewing instructions we create is the result of our team's careful, meticulous work. May they help you develop your sewing hobby—or even turn it into your life's work! Enjoy every step of the sewing process and create a thoughtful, stylish wardrobe!

If you have any questions, we're always here to help: [info@vikisews.com](mailto:info@vikisews.com)

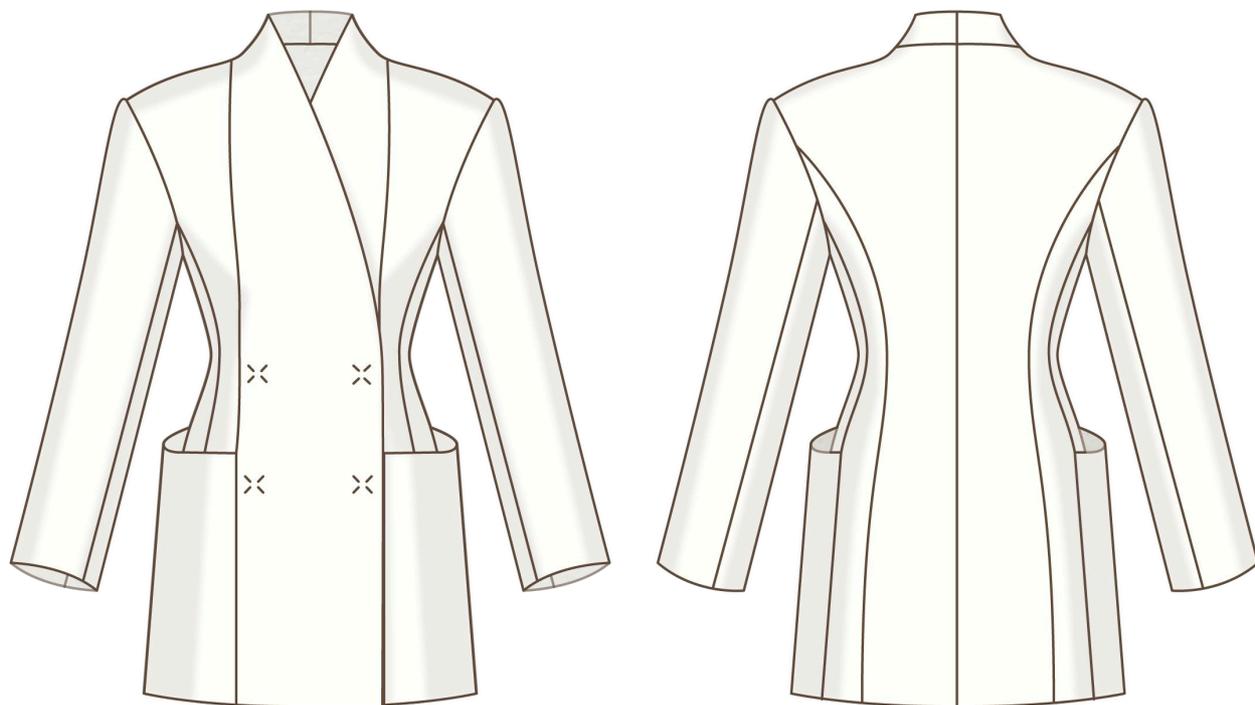

## BRIONI PATTERN DESCRIPTION

---

Briony is a semi-fitted, fully lined blazer with an accentuated waist. There are side panels at the front and back and in-seam pockets at the sides. The blazer is fitted with front and back princess seams and a center back seam. The shoulder line is extended. The long set-in sleeves are made up of two pieces. The blazer features a grown-on stand collar and a double-breasted snap closure. Briony is below-hip length.



## PLEASE READ BEFORE USE

---

The contents of this pattern are copyright protected and belong exclusively to Vikisews. You may use Vikisews patterns for personal use. It is prohibited to share Vikisews patterns and instructions with third parties, as well as to publish patterns and instructions online for public access. **Non-compliance with the mentioned rules is a violation of the US copyright law and may result in civil liability and criminal prosecution.**

You may use Vikisews patterns for commercial use, to sew custom-made garments and/or create fashion collections, on the condition that the patterns are solely used in a manufacturing setting and are not further shared with individuals.

# TOTAL EASE ALLOWANCE

---

	Bust ease	Waistline ease	Hipline ease	Upper arm ease
cm	36.4–32.5	57.7–53.3	33.7–29.3	21.8–12.8
inches	14 $\frac{3}{8}$ –12 $\frac{3}{4}$	22 $\frac{3}{4}$ –21	13 $\frac{1}{4}$ –11 $\frac{1}{2}$	8 $\frac{5}{8}$ –5

# GARMENT LENGTH, SLEEVE LENGTH

---

Height, cm	Back length, cm	Sleeve length including shoulder width, cm
1 (154–160)	121.6–125.2	72.1–77.1
2 (162–168)	125.6–129.2	74–79
3 (170–176)	129.6–133.2	75.9–80.8
4 (178–184)	133.6–137.2	77.8–82.7

Height, ft	Back length, in	Sleeve length including shoulder width, in
1 (5'1"–5'3")	47 $\frac{7}{8}$ –49 $\frac{1}{4}$	28 $\frac{3}{8}$ –30 $\frac{3}{8}$
2 (5'4"–5'6")	49 $\frac{1}{2}$ –50 $\frac{7}{8}$	29 $\frac{1}{8}$ –31 $\frac{1}{8}$
3 (5'7"–5'9")	51–52 $\frac{1}{2}$	29 $\frac{7}{8}$ –31 $\frac{3}{4}$
4 (5'10"–6'1")	52 $\frac{5}{8}$ –54	30 $\frac{5}{8}$ –32 $\frac{1}{2}$

# SUGGESTED FABRICS

---

To sew this coat, choose medium weight, soft, non-stretch or low-stretch coating fabrics made of natural, artificial, blended, or synthetic fibers.

The following fabrics are recommended: wool, alpaca, cashmere, boucle.

Choose solid colors or melange fabrics, with short to medium pile, or without pile.

For the lining, use lining fabrics made of artificial, blended, or synthetic fibers.

The coat in the photo is made of wool coating fabric. The fabric has a medium pile. The fabric is medium weight, soft, and low-stretch. The fiber content is 100% wool. The fabric weight is 470 g/m<sup>2</sup>.

The lining is made of 46% viscose + 54% polyester. The fabric weight is 100 g/m<sup>2</sup>.

# FABRIC AND NOTIONS REQUIREMENTS

1. Main fabric, 140 cm wide, with a directional print/nap, in meters:

Height, cm	Size							
	34	36	38	40	42	44-46	48-50	52
1 (154-160)	2.05	2.05	2.1	2.1	2.2	2.25	2.35	2.35
2 (162-168)	2.1	2.15	2.15	2.2	2.3	2.35	2.45	2.5
3 (170-176)	2.2	2.25	2.25	2.25	2.4	2.4	2.55	2.6
4 (178-184)	2.3	2.3	2.35	2.35	2.5	2.5	2.65	2.7

Main fabric, 55" wide, with a directional print/nap, in yards:

Height, ft	Size							
	34	36	38	40	42	44-46	48-50	52
1 (5'1"-5'3")	2 ¼	2 ¼	2 ¼	2 ¼	2 ¾	2 ½	2 ⅝	2 ⅝
2 (5'4"-5'6")	2 ¼	2 ¾	2 ¾	2 ¾	2 ½	2 ⅝	2 ⅝	2 ¾
3 (5'7"-5'9")	2 ¾	2 ½	2 ½	2 ½	2 ⅝	2 ⅝	2 ¾	2 ⅞
4 (5'10"-6'1")	2 ½	2 ½	2 ⅝	2 ⅝	2 ¾	2 ¾	2 ⅞	3

2. Lining fabric, 140 cm wide, with a directional print, in meters:

Height, cm	Size			
	34-36	38	40-42	44-52
1 (154-160)	1.35	1.35	1.4	1.45
2 (162-168)	1.4	1.4	1.45	1.5
3 (170-176)	1.45	1.5	1.5	1.55
4 (178-184)	1.5	1.55	1.55	1.6

Lining fabric, 55" wide, with a directional print, in yards:

Height, ft	Size			
	34-36	38	40-42	44-52
1 (5'1"-5'3")	1 ½	1 ½	1 ½	1 ⅝
2 (5'4"-5'6")	1 ½	1 ½	1 ⅝	1 ⅝
3 (5'7"-5'9")	1 ⅝	1 ⅝	1 ⅝	1 ¾
4 (5'10"-6'1")	1 ⅝	1 ¾	1 ¾	1 ¾

**IMPORTANT!** When purchasing fabric, please account for shrinkage and buy 5% more than required.

3. Lightweight interfacing, knit or woven, 140 cm wide, 40–50 g/m<sup>2</sup>, in meters:

Height, cm	Size									
	34	36	38	40	42	44	46	48	50	52
1 (154–160)	2.4	2.45	2.45	2.5	2.6	2.6	2.7	2.8	2.8	2.85
2 (162–168)	2.5	2.55	2.55	2.55	2.7	2.7	2.75	2.9	2.9	2.95
3 (170–176)	2.6	2.65	2.65	2.65	2.75	2.8	2.8	3	3	3.05
4 (178–184)	2.7	2.7	2.75	2.75	2.85	2.9	2.9	3.1	3.15	3.15

Lightweight interfacing, knit or woven, 55" wide, 40–50 g/m<sup>2</sup>, in yards:

Height, ft	Size									
	34	36	38	40	42	44	46	48	50	52
1 (5'1"–5'3")	2 <sup>5</sup> / <sub>8</sub>	2 <sup>5</sup> / <sub>8</sub>	2 <sup>5</sup> / <sub>8</sub>	2 <sup>3</sup> / <sub>4</sub>	2 <sup>7</sup> / <sub>8</sub>	2 <sup>7</sup> / <sub>8</sub>	3	3	3	3 <sup>1</sup> / <sub>8</sub>
2 (5'4"–5'6")	2 <sup>3</sup> / <sub>4</sub>	3	3	3	3 <sup>1</sup> / <sub>8</sub>	3 <sup>1</sup> / <sub>8</sub>	3 <sup>1</sup> / <sub>4</sub>			
3 (5'7"–5'9")	2 <sup>7</sup> / <sub>8</sub>	3	3	3	3 <sup>1</sup> / <sub>4</sub>	3 <sup>1</sup> / <sub>4</sub>	3 <sup>3</sup> / <sub>8</sub>			
4 (5'10"–6'1")	3	3	3	3	3 <sup>1</sup> / <sub>8</sub>	3 <sup>1</sup> / <sub>8</sub>	3 <sup>1</sup> / <sub>8</sub>	3 <sup>3</sup> / <sub>8</sub>	3 <sup>1</sup> / <sub>2</sub>	3 <sup>1</sup> / <sub>2</sub>

4. Stitched bias-cut fusible stay tape with stitch reinforcement, 1.5 cm (5/8") wide — 4–4.5 m (4 <sup>3</sup>/<sub>8</sub>–4 <sup>7</sup>/<sub>8</sub> yd)

5. One pair of shoulder pads, 1.5 cm (5/8") thick

6. One pair of sleeve heads

7. Four sew-on snaps, 2 cm (3/4") in diameter

8. Matching thread — 1 spool for the sewing machine

9. Matching thread for lining fabric — 1 spool for the sewing machine

# TOOLS AND EQUIPMENT

---

- sewing machine for construction
- stitch-in-the-ditch foot for the sewing machine (optional)

## PATTERN PIECES LIST

---

### 1. From main fabric:

- center front – cut 2
- middle front – cut 2
- side front – cut 2
- bottom front – cut 2
- center back – cut 2
- middle back – cut 2
- side back – cut 2
- top sleeve– cut 2
- bottom sleeve– cut 2
- front facing – cut 2
- back neck facing – cut 1

### 2. From lining fabric:

- front lining – cut 2
- back lining – cut 2
- top sleeve lining – cut 2
- bottom sleeve lining – cut 2
- pocket lining – cut 2

### 3. From interfacing:

- center front – cut 2
- middle front – cut 2
- side front – cut 2
- bottom front – cut 2
- center back – cut 2
- middle back – cut 2
- side back – cut 2
- top sleeve– cut 2
- bottom sleeve– cut 2
- front facing – cut 2
- back neck facing – cut 1

### 4. From second layer interfacing (marked on pattern):

- center front – cut 2
- middle front – cut 2
- side front – cut 2
- bottom front – cut 2
- center back – cut 2
- middle back – cut 2
- side back – cut 2
- top sleeve– cut 2
- bottom sleeve– cut 2

**IMPORTANT!** Don't forget to transfer all pattern markings and notches onto the fabric.

# SEAM ALLOWANCES

---

All pattern pieces include seam allowances as follows:


- garment hem allowance — 4 cm (1 5/8")
- sleeve hem allowance — 4 cm (1 5/8")
- all other edges — 1 cm (3/8")

Take this into account when laying out the pattern pieces on the fabric.

# CUTTING LAYOUT


---

Main fabric, 140 cm (55") wide, with a directional print/nap, cut on fold,  
for sizes 34–40 in all heights

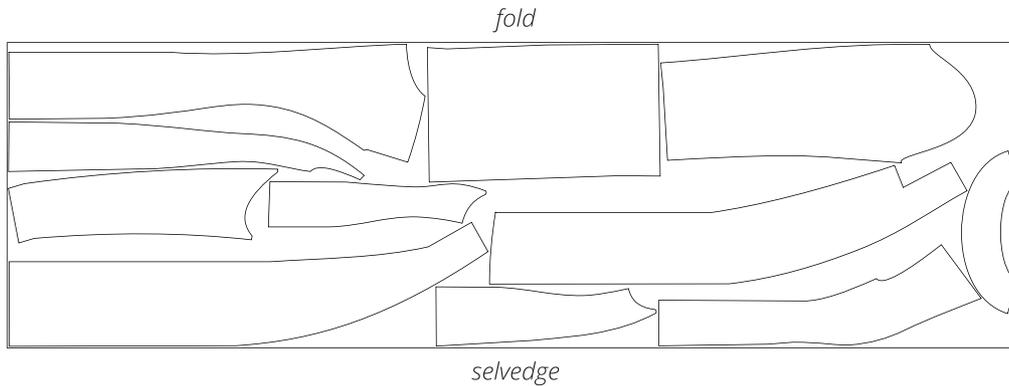

**Important!** Cut only one back neck facing piece.

Main fabric, 140 cm (55") wide, with a directional print/nap, cut on fold,  
for sizes 42–46 in all heights

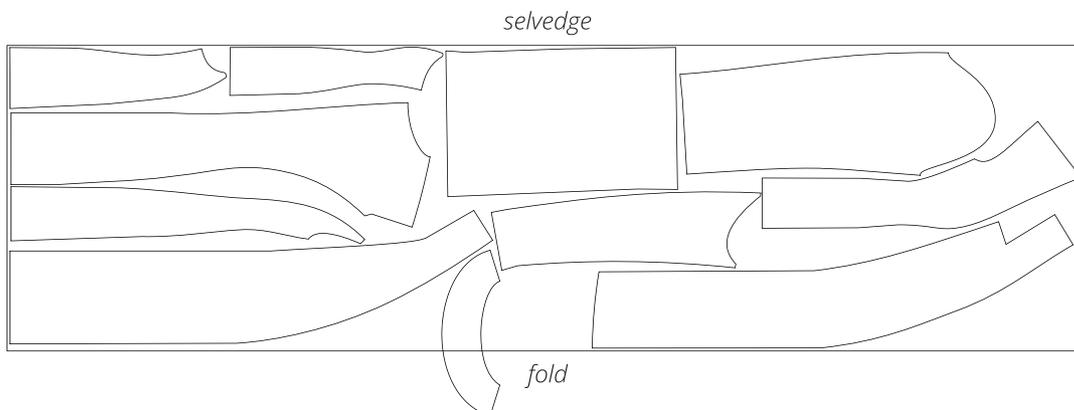


**Important!** The back neck facing is cut on a single layer out of leftover fabric as a single piece.

Main fabric, 140 cm (55") wide, with a directional print/nap, cut on fold,  
for sizes 48-52 in all heights




**Important!** The back neck facing is cut on a single layer out of leftover fabric  
as a single piece.

Lining fabric, 140 cm (55") wide, cut on fold,  
for sizes 34-42 in all heights

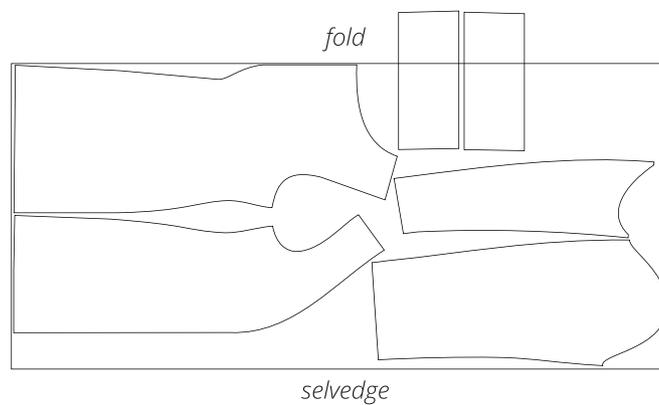


**Important!** Cut the pocket lining pieces on a single layer out of leftover fabric.

Lining fabric, 140 cm (55") wide, cut on fold,  
for sizes 44–52 in all heights

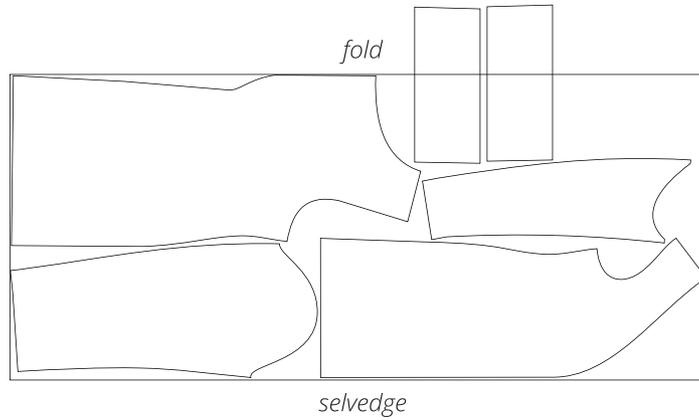


**Important!** Cut the pocket lining pieces on a single layer out of leftover fabric.

Interfacing, 140 cm (55") wide, cut on fold,  
for sizes 34–40 in all heights

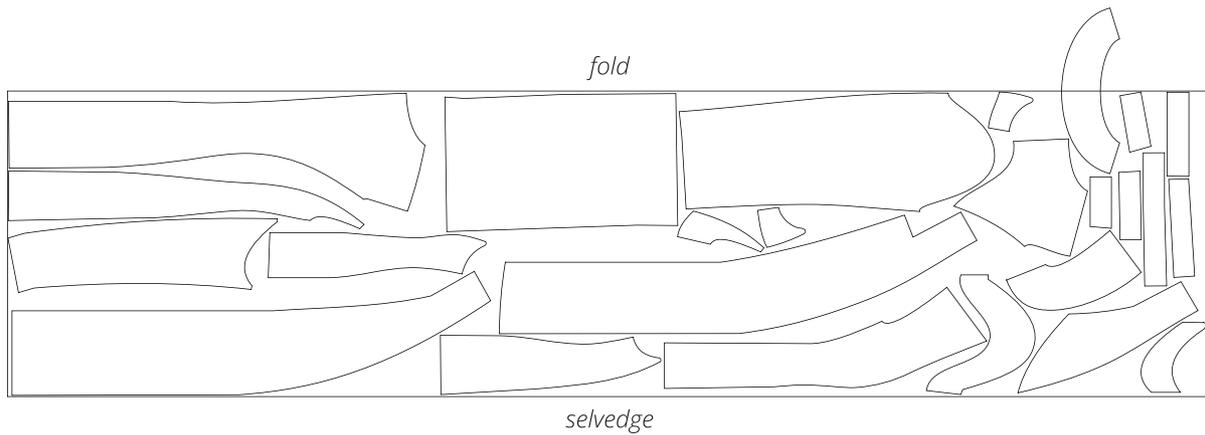


**Important!** The back neck facing is cut on a single layer out of leftover fabric as a single piece.

Interfacing, 140 cm (55") wide, cut on fold,  
for sizes 42–46 in all heights

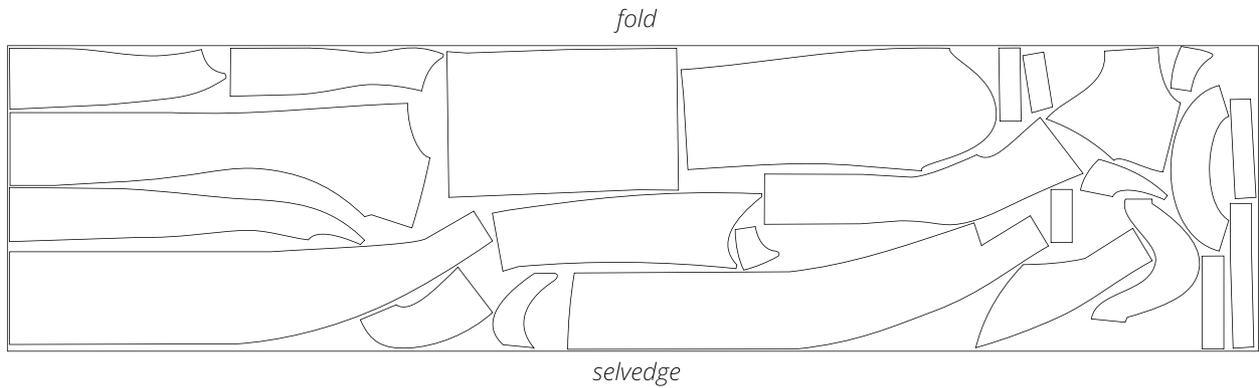

**Important!** Cut only one back neck facing piece.


Interfacing, 140 cm (55") wide, cut on fold,  
for sizes 48–52 in all heights

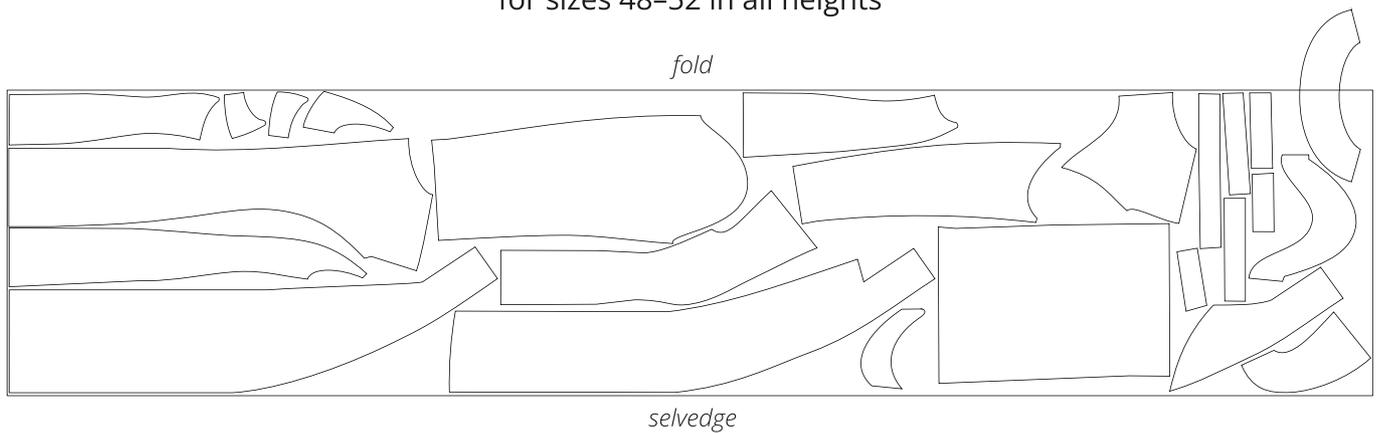

**Important!** The back neck facing piece is cut on a single layer out of leftover fabric as a single piece.

**READY? LET'S GET SEWING!**

---

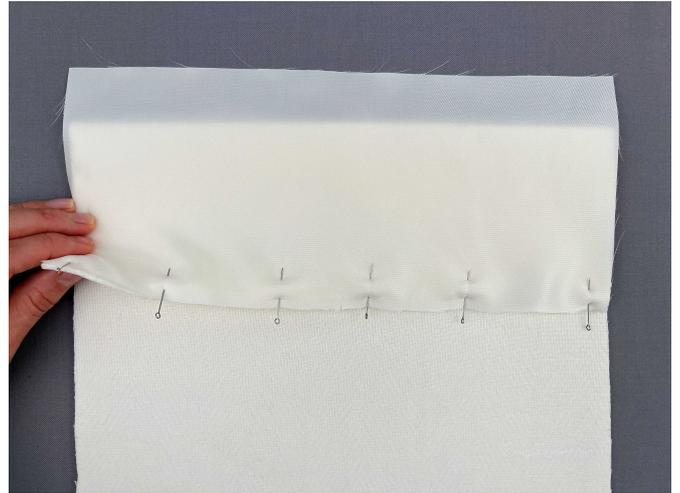

6. Place the pocket lining piece and the bottom front right sides together. Align the edges, match the notches, and pin.



7. Machine-stitch, backstitching at the beginning and end of the seam.

8. Press the seam allowances towards the pocket lining.



9. Place the bottom front piece right side up onto the assembled side part of the garment. Align the side edges, match the pocket notches, and pin.