

# FROM THE FOUNDER OF THE VIKISEWS® BRAND

---



Back in 2016, when I started making my first sewing patterns and instruction manuals, my main goal was to solve the problems I personally faced at the beginning of my sewing journey: the lack of stylish patterns that provide a great fit and contain clear sewing instructions. That's how Vikisews was born—a brand designed to help you create fashionable, on-trend clothing with your own hands.



The sewing instructions we create is the result of our team's careful, meticulous work. May they help you develop your sewing hobby—or even turn it into your life's work! Enjoy every step of the sewing process and create a thoughtful, stylish wardrobe!

If you have any questions, we're always here to help: [info@vikisews.com](mailto:info@vikisews.com)



## IRATI PATTERN DESCRIPTION

---

Irati is a semi-fitted quilted jacket with a straight cut. There are welt pockets with sewn-on ends on the front. The back features a wide belt loop. The jacket has an extended shoulder line and long shirt sleeves finished with bias binding at the bottom. The neckline is round. The neckline, front, and bottom edges of the jacket are finished with bias binding. The jacket has a detachable belt and a center front snap closure. Irati is hip length.



## PLEASE READ BEFORE USE

---

The contents of this pattern are copyright protected and belong exclusively to Vikisews. You may use Vikisews patterns for personal use. It is prohibited to share Vikisews patterns and instructions with third parties, as well as to publish patterns and instructions online for public access. **Non-compliance with the mentioned rules is a violation of the US copyright law and may result in civil liability and criminal prosecution.**

You may use Vikisews patterns for commercial use, to sew custom-made garments and/or create fashion collections, on the condition that the patterns are solely used in a manufacturing setting and are not further shared with individuals.

# TOTAL EASE ALLOWANCE

---

	Bust ease	Waistline ease	Hipline ease	Upper arm ease
cm	38.1-31.8	56-49.2	28.2-20.5	14.4-14.6
inches	15-12 1/2	22-19 3/8	11 1/8-8 1/8	5 5/8-5 3/4

# GARMENT LENGTH, SLEEVE LENGTH

---

Height, cm	Garment length, cm	Sleeve length, cm
1 (154-160)	63.4-66.1	73-75.6
2 (162-168)	66.4-69.1	74.9-77.5
3 (170-176)	69.4-72.1	76.8-79.4
4 (178-184)	72.4-75.1	78.7-81.3

Height, ft	Garment length, in	Sleeve length, in
1 (5'1"-5'3")	25-26	28 3/4-29 3/4
2 (5'4"-5'6")	26 1/8-27 1/4	29 1/2-30 1/2
3 (5'7"-5'9")	27 3/8-28 3/8	30 1/4-31 1/4
4 (5'10"-6'1")	28 1/2-29 5/8	31-32

# SUGGESTED FABRICS

---

To sew this jacket, choose medium weight, non-stretch or low-stretch outerwear and raincoat fabrics made of natural, artificial, blended, or synthetic fibers.

The following fabrics are recommended: double-sided quilted outerwear fabric.

For additional fabric used in bindings, we recommend outerwear fabric with the same properties.

The jacket in the photo is made of double-sided quilted outerwear fabric. The fabric is medium weight, pliable, and low-stretch. The fiber content is 100% polyester. The fabric weight is 290-310 g/m<sup>2</sup>.

The additional fabric (outerwear fabric) has a fiber content of 100% polyester. The fabric weight is 150 g/m<sup>2</sup>.

# FABRIC AND NOTIONS REQUIREMENTS

1. Main fabric, 140 cm wide, with a directional print/nap, in meters:

Height, cm	Size				
	34	36	38-40	42-48	50-52
1 (154-160)	1.6	1.75	1.85	1.95	2.05
2 (162-168)	1.65	1.75	1.85	2	2.1
3 (170-176)	1.7	1.8	1.9	2.05	2.15
4 (178-184)	1.75	1.85	1.95	2.1	2.2

Main fabric, 55" wide, with a directional print/nap, in yards:

Height, ft	Size				
	34	36	38-40	42-48	50-52
1 (5'1"-5'3")	1 3/4	1 7/8	2	2 1/8	2 1/4
2 (5'4"-5'6")	1 3/4	1 7/8	2	2 1/8	2 1/4
3 (5'7"-5'9")	1 7/8	2	2 1/8	2 1/4	2 3/8
4 (5'10"-6'1")	1 7/8	2	2 1/8	2 1/4	2 3/8

1.1. Main fabric, 140 cm wide, with a directional print/nap (binding strips cut from additional fabric), in meters:

Height, cm	Size				
	34-38	40	42-44	46-48	50-52
1 (154-160)	1.45	1.5	1.7	1.75	1.95
2 (162-168)	1.5	1.55	1.75	1.8	1.95
3 (170-176)	1.6	1.6	1.8	1.85	2
4 (178-184)	1.65	1.65	1.85	1.9	2.05

Main fabric, 55" wide, with a directional print/nap (binding strips cut from additional fabric), in yards:

Height, ft	Size				
	34-38	40	42-44	46-48	50-52
1 (5'1"-5'3")	1 5/8	1 5/8	1 7/8	1 7/8	2 1/8
2 (5'4"-5'6")	1 5/8	1 3/4	1 7/8	2	2 1/8
3 (5'7"-5'9")	1 3/4	1 3/4	2	2	2 1/8
4 (5'10"-6'1")	1 3/4	1 3/4	2	2 1/8	2 1/4

2. Additional fabric, 140 cm (55") wide, for all heights:

Size	34–36	38–42	44–50	52
meters	0.65	0.7	0.75	0.8
yards	3/4	3/4	7/8	7/8

**IMPORTANT!** When purchasing fabric, please account for shrinkage and buy 5% more than required.

3. Five S-spring set-in snaps, 12.5 mm (1/2") in diameter (+ 1–2 spare ones)

4. Matching thread — 2 spools.

5. Tape twill as long as the belt piece (optional).

## TOOLS AND EQUIPMENT

- sewing machine for construction
- hole puncher or awl
- press tool and molds for installing snaps

## PATTERN PIECES LIST

### 1. From main fabric:

- front – cut 2
- back – cut 1 on fold
- sleeve – cut 2
- belt loop – cut 1
- belt – cut 2
- welt – cut 2
- pocket lining – cut 4
- welt binding – cut 2
- pocket binding – cut 2
- armscye binding – cut 2

### 2. From additional fabric (outwear fabric):

- bias binding– cut 5

**IMPORTANT!** Don't forget to transfer all pattern markings and notches onto the fabric.

## SEAM ALLOWANCES

All pattern pieces include seam allowances as follows:


- side seams — 1.5 cm (5/8")
- shoulder seams — 1.5 cm (5/8")
- sleeve side seams — 1.5 cm (5/8")
- pocket lining curved edges — 1.5 cm (5/8")
- all other edges — 1 cm (3/8")

Take this into account when laying out the pattern pieces on the fabric.


# CUTTING LAYOUT

---


Option 1 (all pieces are cut from the main fabric)  
Main fabric, 140 cm (55") wide, with a directional print/nap, cut on a single layer,  
for size 34 in all heights

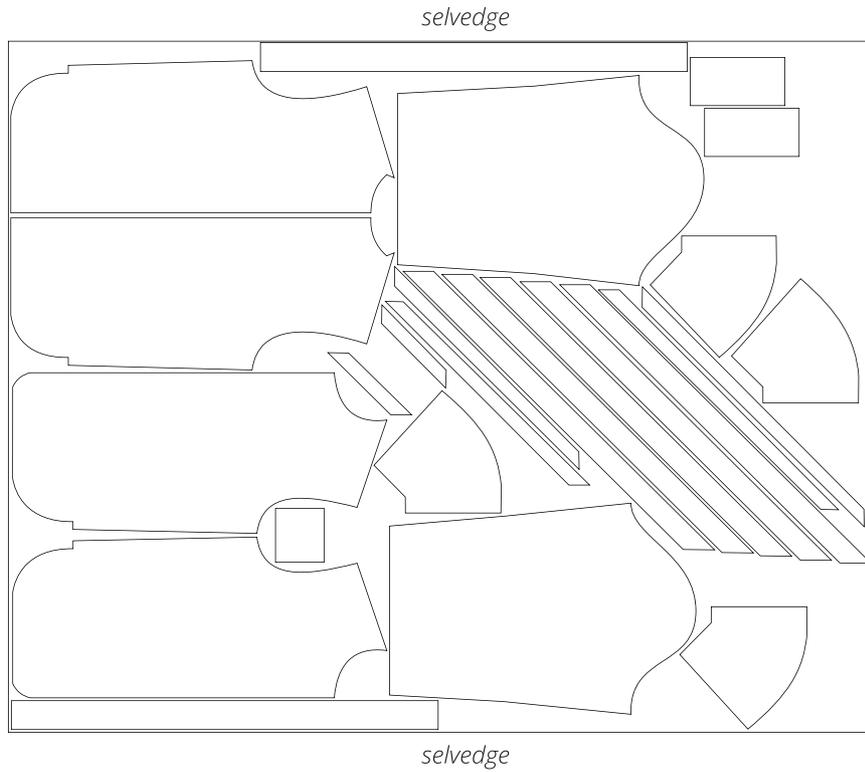


Main fabric, 140 cm (55") wide, with a directional print/nap, cut on a single layer,  
for sizes 36–40 in all heights

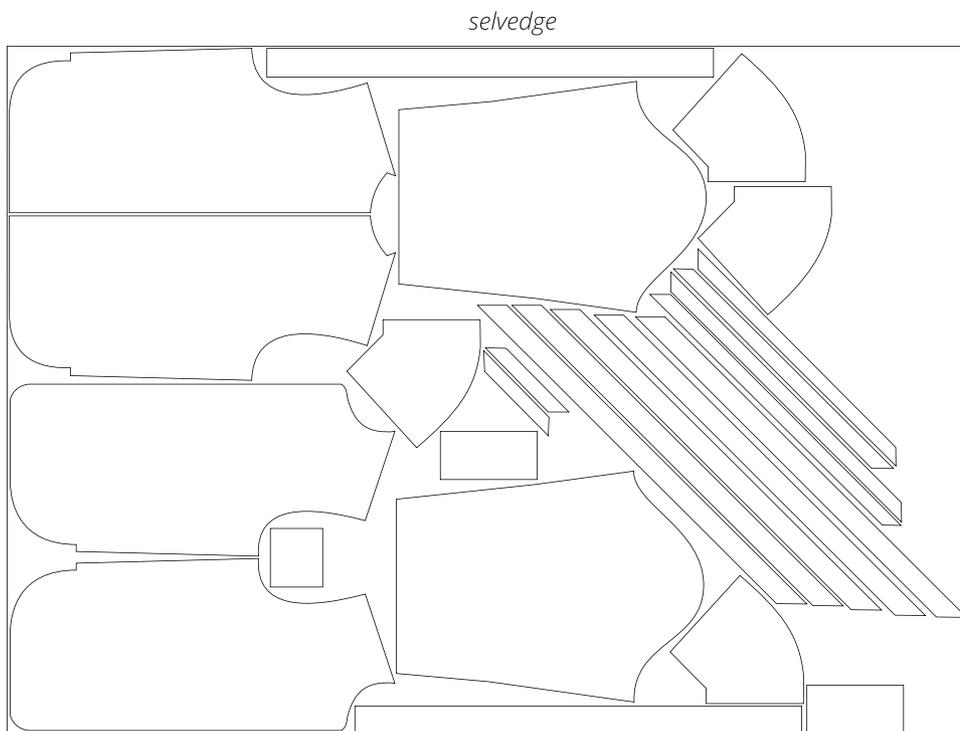


Main fabric, 140 cm (55") wide, with a directional print/nap, cut on a single layer,  
for sizes 42–48 in all heights

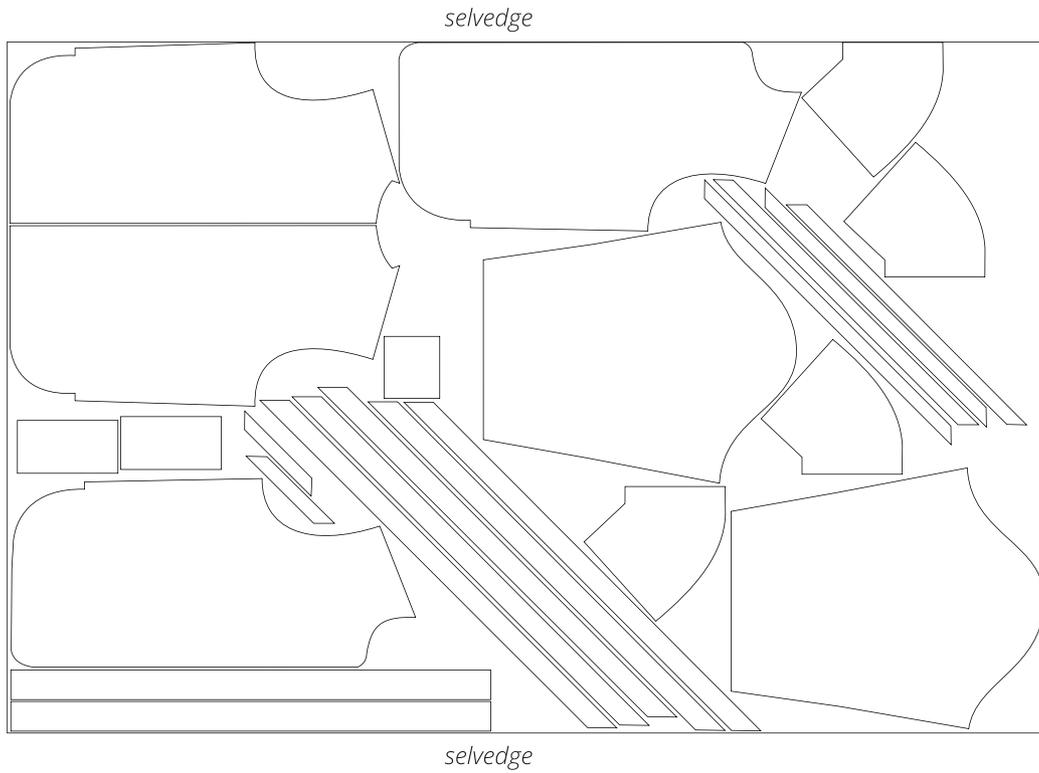


Main fabric, 140 cm (55") wide, with a directional print/nap, cut on a single layer,  
for sizes 50–52 in all heights

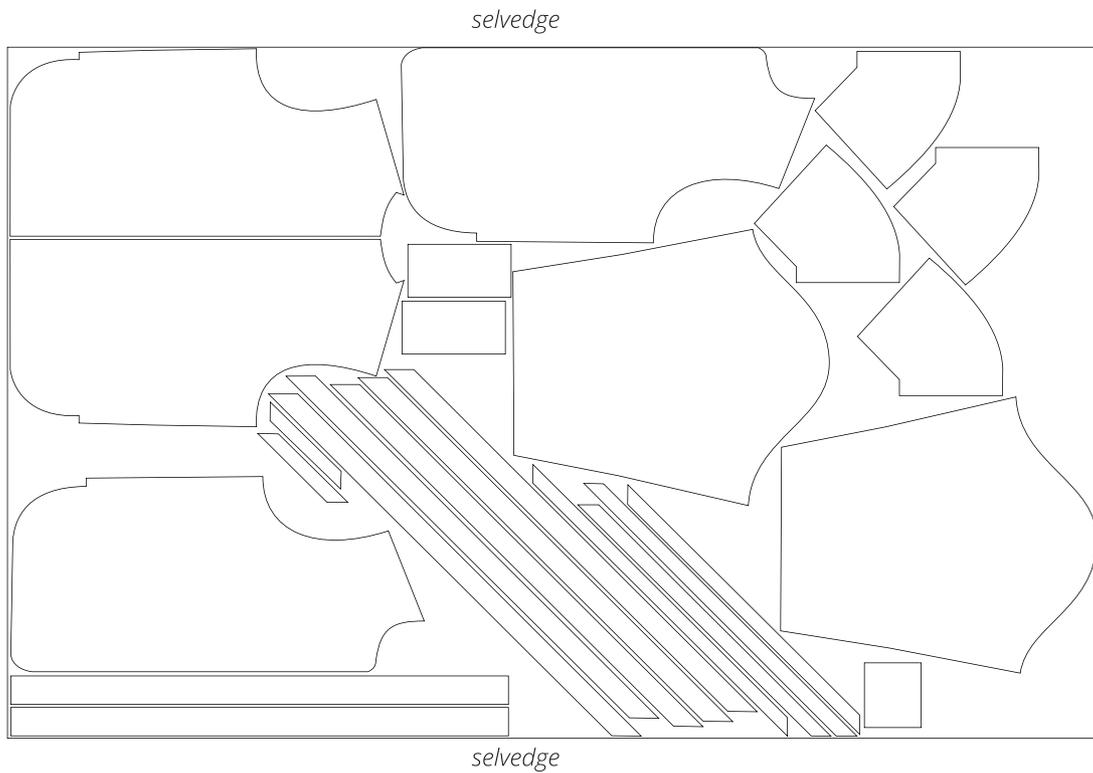


Option 2 (the binding pieces are cut from additional fabric)  
Main fabric, 140 cm (55") wide, with a directional print/nap, cut on a single layer,  
for sizes 34–40 in all heights

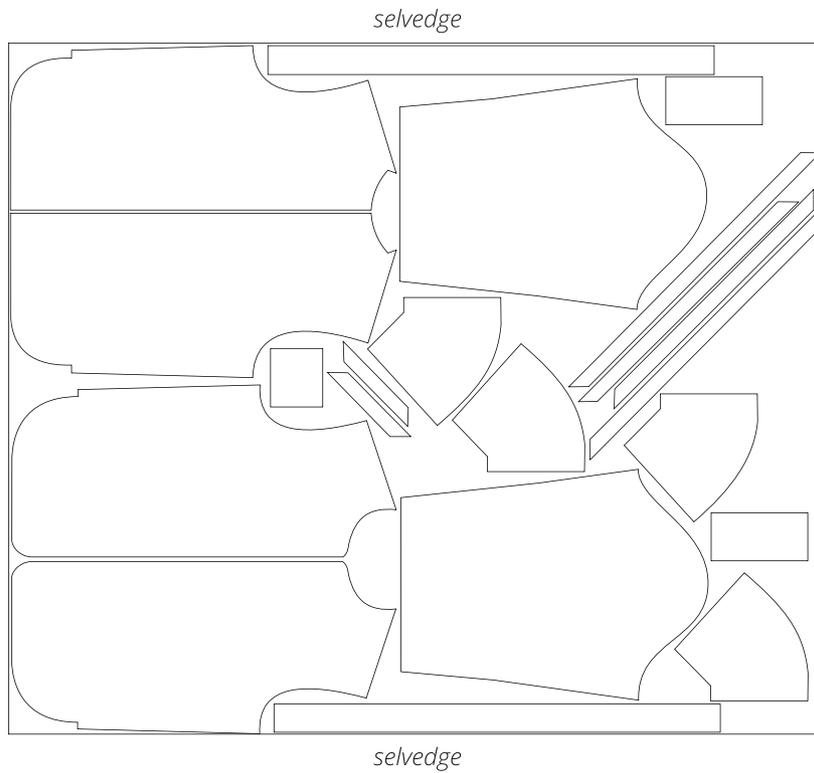


Main fabric, 140 cm (55") wide, with a directional print/nap, cut on a single layer,  
for sizes 42–48 in all heights

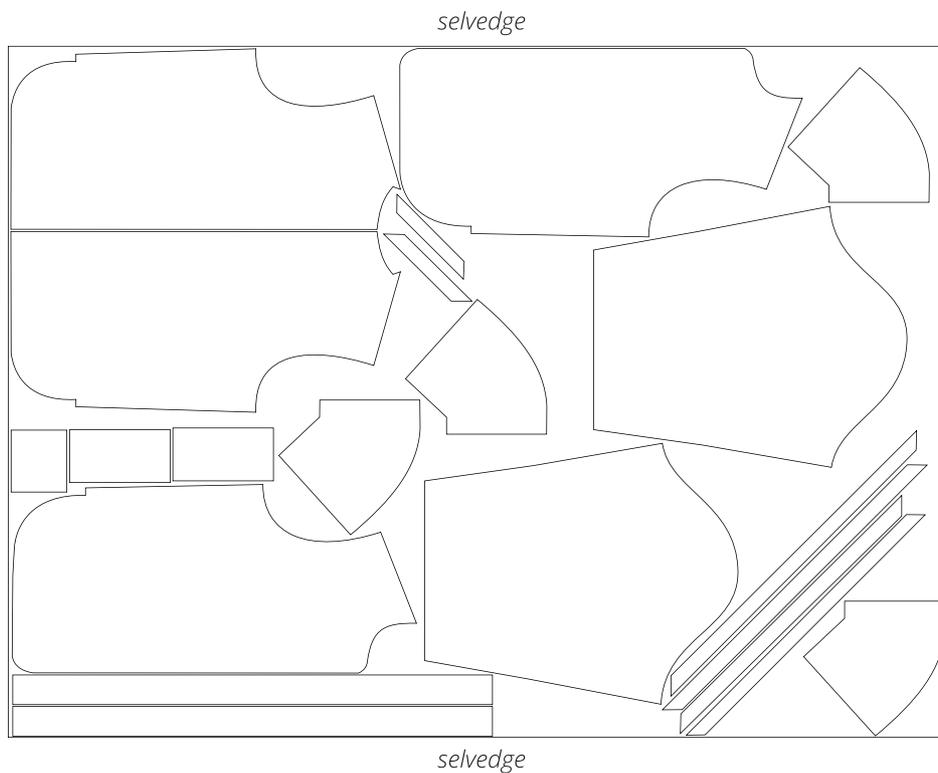

Main fabric, 140 cm (55") wide, with a directional print/nap, cut on a single layer,  
for sizes 50–52 in all heights

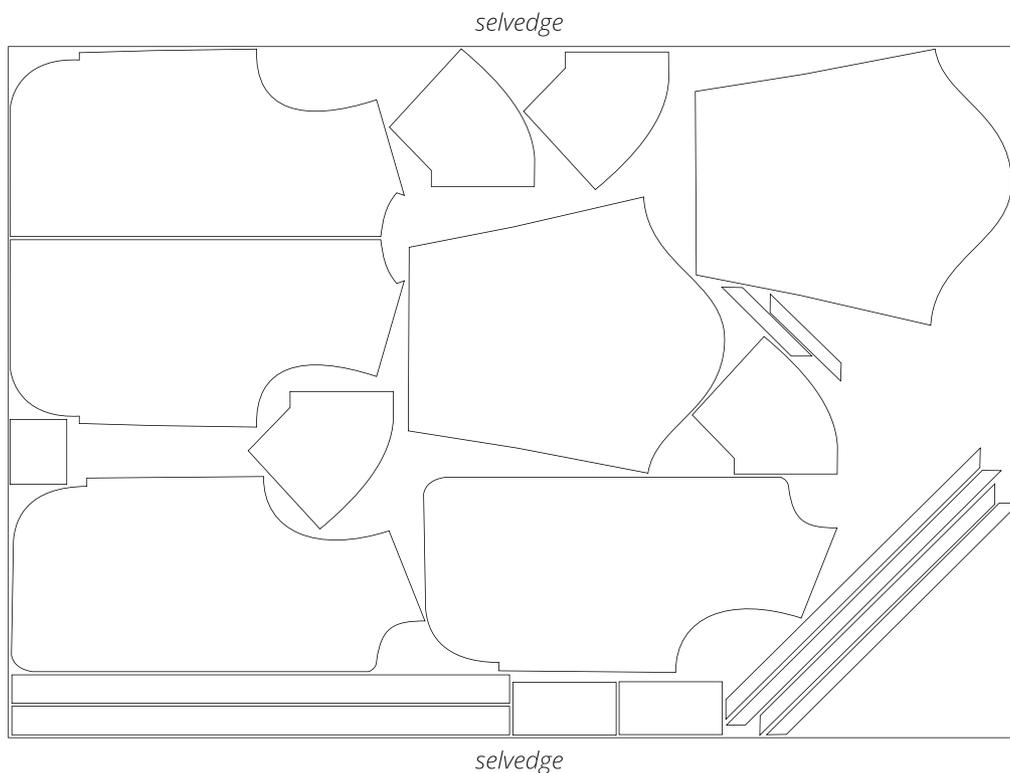

Additional fabric 140 cm wide, with a directional print, cut on a single layer,  
for all sizes in all heights

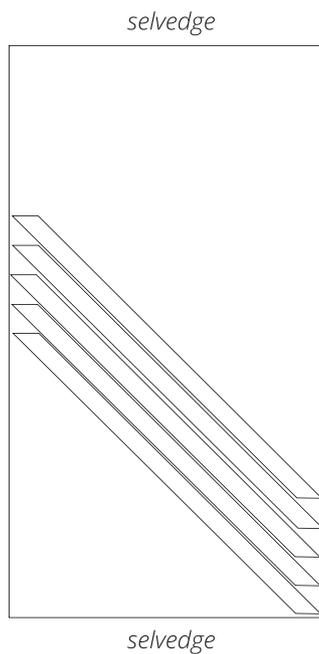

**READY? LET'S GET SEWING!**



5. Place the walt binding right sides together with the walt. Align the long edges. Pin in place.



6. Stitch on the sewing machine at 5–7 mm (around 1/4") from the edge. Backstitch at the beginning and end of the seam. Press the seam allowances towards the binding.

7. Fold the free edge of the binding over the seam allowances. Hand-baste in place. Press the binding.



8. Working on the right side of the walt, stitch over the binding piece at 1 mm from the seam to secure the binding in place. Backstitch at the beginning and end of the seam.

9. Fold the walt piece in half lengthwise, right sides together. Align the short edges and pin.