


Viki

S E W S

BLAZER


MILETTA

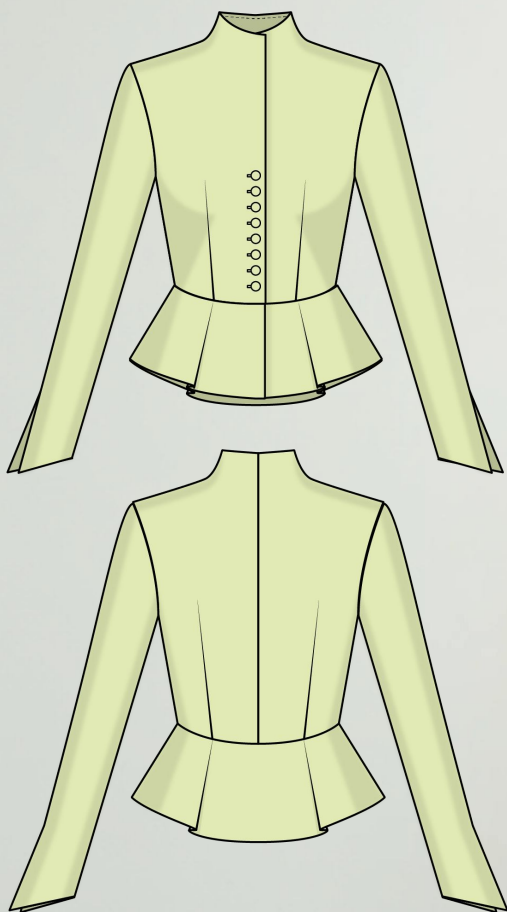

SIZES

34-52

DIFFICULTY



ADVANCED



FROM THE FOUNDER OF THE VIKISEWS® BRAND




Back in 2016, when I started making my first sewing patterns and instruction manuals, my main goal was to solve the problems I personally faced at the beginning of my sewing journey: the lack of stylish patterns that provide a great fit and contain clear sewing instructions. That's how Vikisews was born—a brand designed to help you create fashionable, on-trend clothing with your own hands.



The sewing instructions we create is the result of our team's careful, meticulous work. May they help you develop your sewing hobby—or even turn it into your life's work! Enjoy every step of the sewing process and create a thoughtful, stylish wardrobe!

If you have any questions, we're always here to help: info@vikisews.com

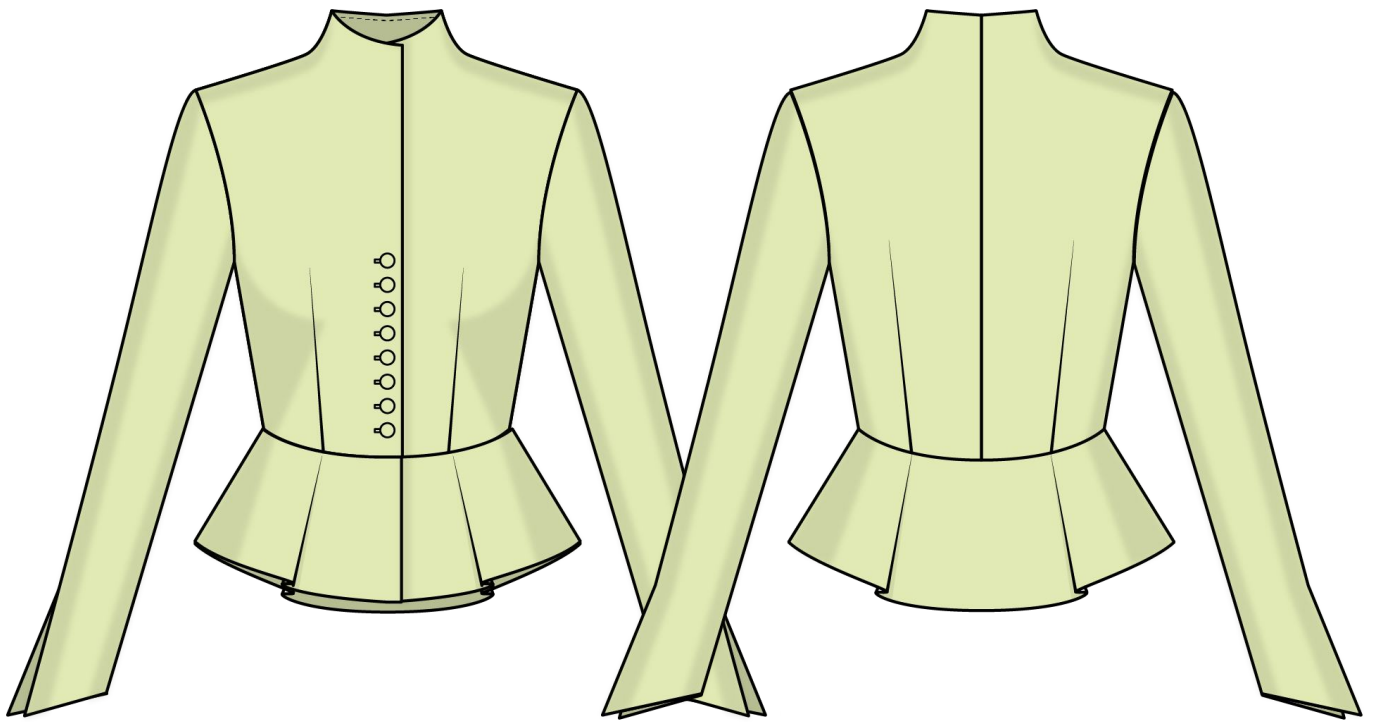

MILETTA PATTERN DESCRIPTION

Miletta is a semi-fitted, fully lined blazer with an accentuated waist and a waist seam. The back is fitted with waist darts and a center seam. The front is fitted with waist darts. Below the waist seam, the blazer is shaped and features pleats at the front and back. The shoulder line is extended. The set-in, two-piece sleeves are long and have slits at the bottom of the overarm seams. The blazer has a grown-on stand collar and closes with buttons and buttonholes. Miletta is above-hip length.



PLEASE READ BEFORE USE

The contents of this pattern are copyright protected and belong exclusively to Vikisews. You may use Vikisews patterns for personal use. It is prohibited to share Vikisews patterns and instructions with third parties, as well as to publish patterns and instructions online for public access. **Non-compliance with the mentioned rules is a violation of the US copyright law and may result in civil liability and criminal prosecution.**

You may use Vikisews patterns for commercial use, to sew custom-made garments and/or create fashion collections, on the condition that the patterns are solely used in a manufacturing setting and are not further shared with individuals.

TOTAL EASE ALLOWANCE

	Bust ease	Waistline ease	Hipline ease (estimated)	Upper arm ease
cm	5.9–3.4	5.4–7.9	38.9–59.1	6.1–2.2
inches	2 3/8–1 3/8	2 1/8–3 1/8	15 3/8–23 1/4	2 3/8–7/8

GARMENT LENGTH, SLEEVE LENGTH

Height, cm	Back length including collar height, cm	Sleeve length along overarm seam, cm
1 (154–160)	62.6–69.8	62.3–62.6
2 (162–168)	65.6–72.8	64.3–64.6
3 (170–176)	68.6–75.7	66.3–66.6
4 (178–184)	71.6–78.7	68.3–68.6

Height, ft	Back length including collar height, in	Sleeve length along overarm seam, in
1 (5'1"–5'3")	24 5/8–27 1/2	24 1/2–24 5/8
2 (5'4"–5'6")	25 7/8–28 5/8	25 3/8–25 3/8
3 (5'7"–5'9")	27–29 3/4	26 1/8–26 1/4
4 (5'10"–6'1")	28 1/4–31	26 7/8–27

SUGGESTED FABRICS

To sew this blazer, choose soft, non-stretch or low-stretch, medium-weight suiting fabrics made of natural, artificial, blended, or synthetic fibers.

The following fabrics are recommended: denim, crepe suiting, gabardine, and polyviscose suiting.

Attention! We do not recommend using stretchy or sheer fabrics!

The blazer in the photo is made of crepe suiting. The fabric is medium weight, soft, and low-stretch. The fiber content is 97% viscose + 3% elastane. The fabric weight is 210 g/m².

FABRIC AND NOTIONS REQUIREMENTS

1. Main fabric, 140 cm wide, with a directional print/nap, in meters:

Height, cm	Size									
	34	36	38	40	42	44	46	48	50	52
1 (154–160)	1.25	1.3	1.45	1.5	1.55	1.55	1.65	1.7	1.75	1.8
2 (162–168)	1.3	1.35	1.55	1.55	1.6	1.65	1.75	1.8	1.8	1.85
3 (170–176)	1.4	1.45	1.6	1.65	1.65	1.7	1.8	1.85	1.9	1.95
4 (178–184)	1.4	1.5	1.65	1.7	1.7	1.8	1.85	1.9	1.95	2

Main fabric, 55" wide, with a directional print/nap, in yards:

Height, ft	Size									
	34	36	38	40	42	44	46	48	50	52
1 (5'1"–5'3")	1 3/8	1 3/8	1 5/8	1 5/8	1 3/4	1 3/4	1 3/4	1 7/8	1 7/8	2
2 (5'4"–5'6")	1 3/8	1 1/2	1 3/4	1 3/4	1 3/4	1 3/4	1 7/8	2	2	2
3 (5'7"–5'9")	1 1/2	1 5/8	1 3/4	1 3/4	1 3/4	1 7/8	2	2	2 1/8	2 1/8
4 (5'10"–6'1")	1 1/2	1 5/8	1 3/4	1 7/8	1 7/8	2	2	2 1/8	2 1/8	2 1/8

2. Lining fabric, 140 cm wide, with a directional print, in meters:

Height, cm	Size									
	34	36	38	40	42	44	46	48	50	52
1 (154–160)	0.85	0.9	0.95	0.95	1	1.05	1.1	1.25	1.3	1.35
2 (162–168)	0.9	0.9	0.95	1	1.05	1.1	1.15	1.35	1.4	1.45
3 (170–176)	0.95	1	1	1.05	1.1	1.15	1.2	1.4	1.45	1.5
4 (178–184)	1	1.05	1.05	1.1	1.15	1.25	1.3	1.45	1.5	1.6

Lining fabric, 55" wide, with a directional print, in yards:

Height, ft	Size								
	34	36–38	40	42	44	46	48	50	52
1 (5'1"–5'3")	7/8	1	1	1 1/8	1 1/8	1 1/4	1 3/8	1 3/8	1 1/2
2 (5'4"–5'6")	1	1	1 1/8	1 1/8	1 1/4	1 1/4	1 1/2	1 1/2	1 5/8
3 (5'7"–5'9")	1	1 1/8	1 1/8	1 1/4	1 1/4	1 1/4	1 1/2	1 5/8	1 5/8
4 (5'10"–6'1")	1 1/8	1 1/8	1 1/4	1 1/4	1 3/8	1 3/8	1 5/8	1 5/8	1 3/4

3. Lightweight interfacing, knit or woven, 140 cm (55") wide:

Size	34	36	38	40	42	44–46	48	50–52
meters	1.15	1.2	1.25	1.35	1.4	1.45	1.6	1.65
yards	1 1/4	1 1/4	1 3/8	1 1/2	1 1/2	1 5/8	1 3/4	1 3/4

IMPORTANT! When purchasing fabric, please account for shrinkage and buy 5% more than required.

4. Stitched bias-cut fusible stay tape with stitch reinforcement, 1.5 cm (5/8") wide — 1.1 m (1 1/4 yd)
5. Stitched straight-grain fusible stay tape, 1 cm (3/8") wide — 1.66 m (1 3/4 yd)
6. One pair of shoulder pads
7. One pair of sleeve heads
8. ight button blanks (+1–2 spare), 15–18 mm (5/8–7/8") in diameter
9. Matching thread — 2 spools

TOOLS AND EQUIPMENT

- sewing machine for construction
- buttonhole foot for the sewing machine
- press tool and molds for button covering

PATTERN PIECES LIST

1. From main fabric:

- top front — cut 2
- bottom front — cut 2
- top back — cut 2
- bottom back — cut 1 on fold
- front sleeve — cut 2
- back sleeve — cut 2
- front sleeve facing — cut 2
- back sleeve facing — cut 2
- front facing — cut 2
- back neck facing — cut 2

2. From lining fabric:

- top front lining — cut 2
- top back lining — cut 2
- bottom front lining — cut 2
- bottom back lining — cut 1 on fold
- sleeve lining — cut 2

IMPORTANT! Don't forget to transfer all pattern markings and notches onto the fabric.

3. From interfacing:

- top front — cut 2
- top back — cut 2
- bottom front — cut 2
- bottom back — cut 1 on fold
- front sleeve facing — cut 2
- back sleeve facing — cut 2
- front facing — cut 2
- back neck facing — cut 2

Additionally, cut the following from interfacing:

- top sleeve cap section on the front sleeve and back sleeve pieces (marked on the pattern)
- reinfo section on the top front pieces (marked on the pattern)
- top section on the top back pieces (marked on the pattern)

The interfacing pieces should be cut on the straight grain (parallel to the selvedge).


SEAM ALLOWANCES

All pattern pieces include 1 cm (3/8") seam allowances.


Take this into account when laying out the pattern pieces on the fabric.

CUTTING LAYOUT


Main fabric, 140 cm (55") wide, with a directional print/nap,
cut on fold, for sizes 34–36 in all heights

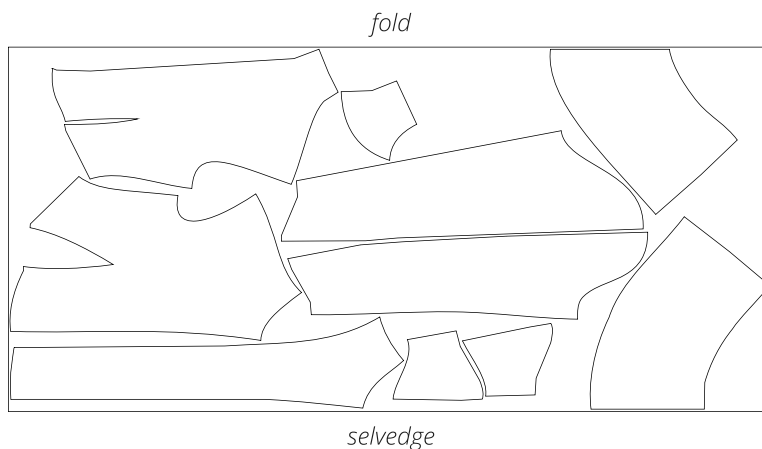


Main fabric, 140 cm (55") wide, with a directional print/nap,
cut on fold, for sizes 38–44 in all heights

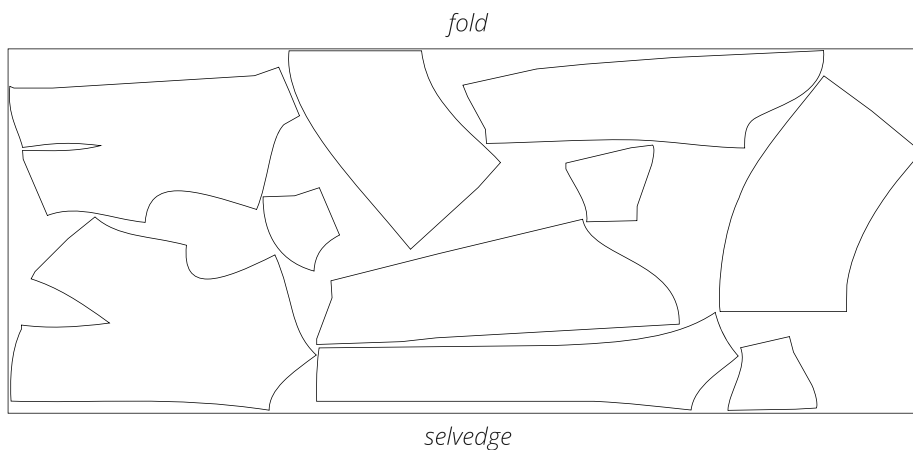


Main fabric, 140 cm (55") wide, with a directional print/nap,
cut on fold, for sizes 46–52 in all heights

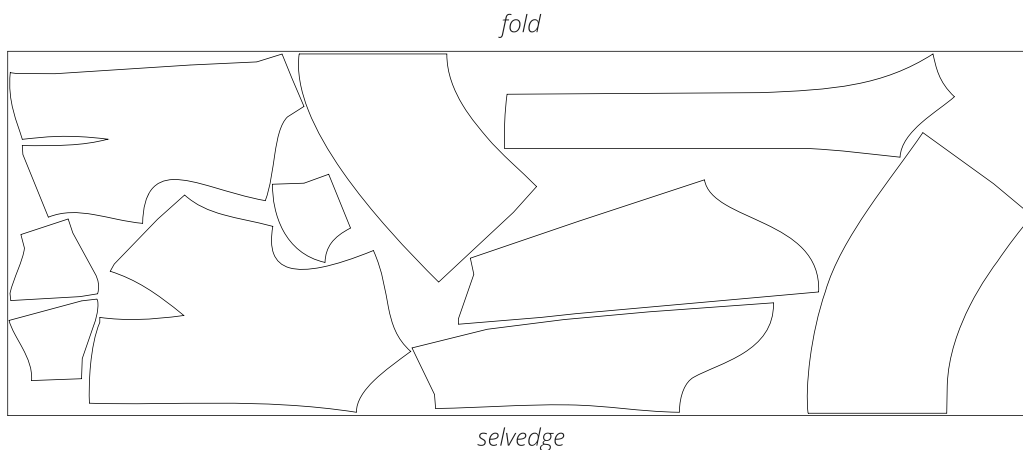


Lining fabric, 140 cm (55") wide, with a directional print, cut on fold,
for sizes 34–46 in all heights

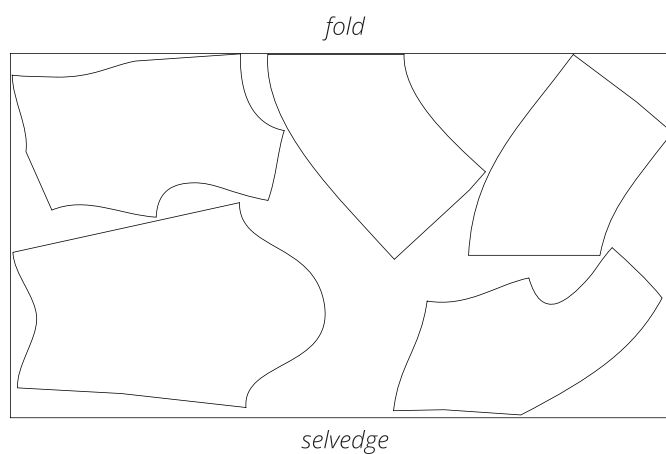


Lining fabric, 140 cm (55") wide, with a directional print cut on fold,
for sizes 48–52 in all heights

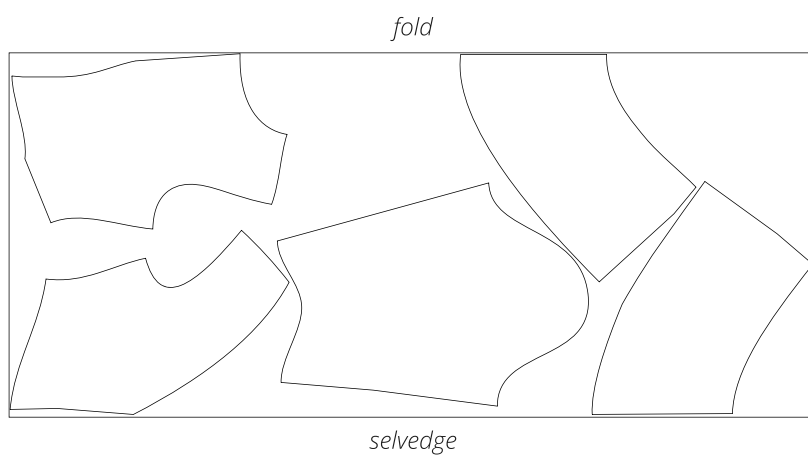


Interfacing, 140 cm (55") wide, cut on fold,
for sizes 34–38 in all heights

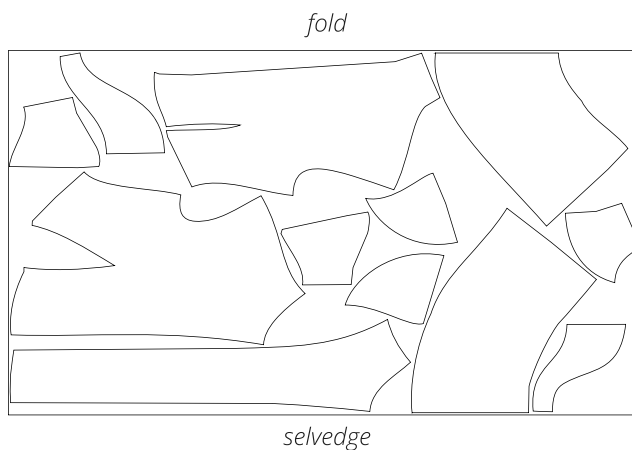


Interfacing, 140 cm (55") wide, cut on fold, for sizes 40–46
in all heights

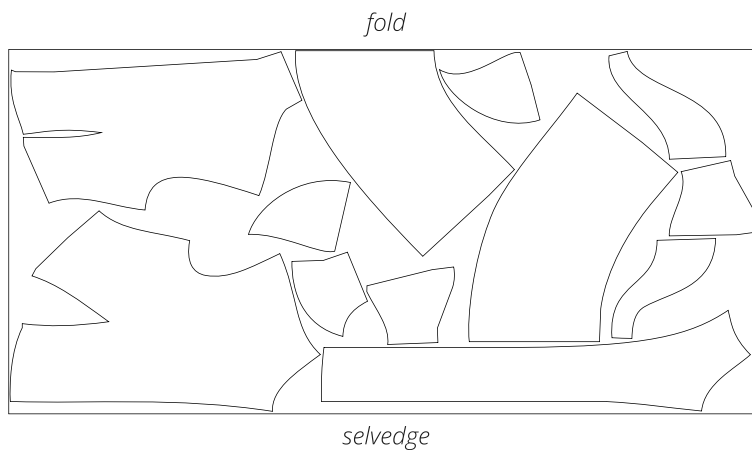

Interfacing, 140 cm (55") wide, cut on fold, for sizes 48–52
in all heights

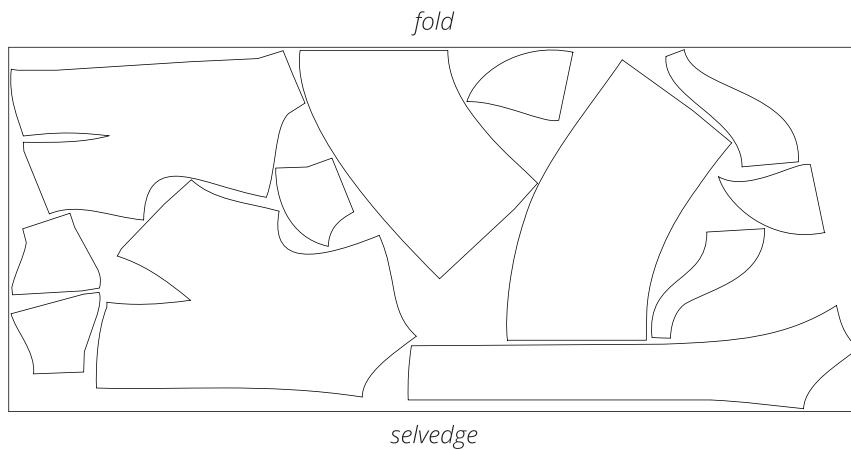

READY? LET'S GET SEWING!

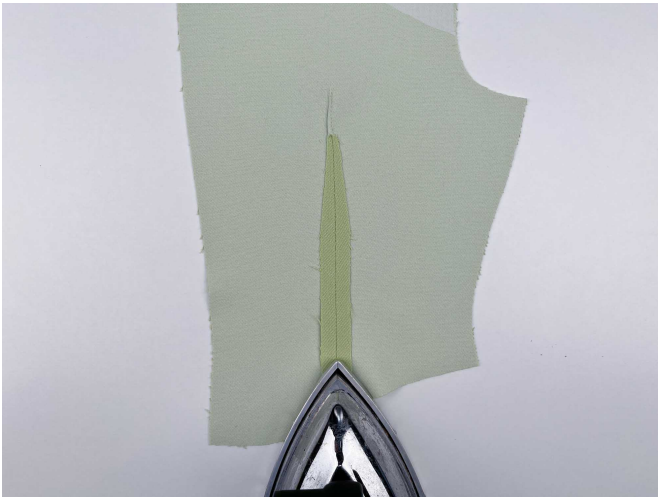

5. On the top front and top back pieces, press the dart seam allowances open. Press the unclipped seam allowances towards the center front or center back. Press and steam the darts. Shrink out the fullness at the dart point on a tailor's ham.




6. Place the top back pieces right sides together. Align the center edges, match the notches, and pin.

Machine-stitch, backstitching at the beginning and end of the seam. Press the seam flat.



7. Clip into the center back seam allowances at the curved section of the grown-on stand collar, stopping 2 mm short of the seam.

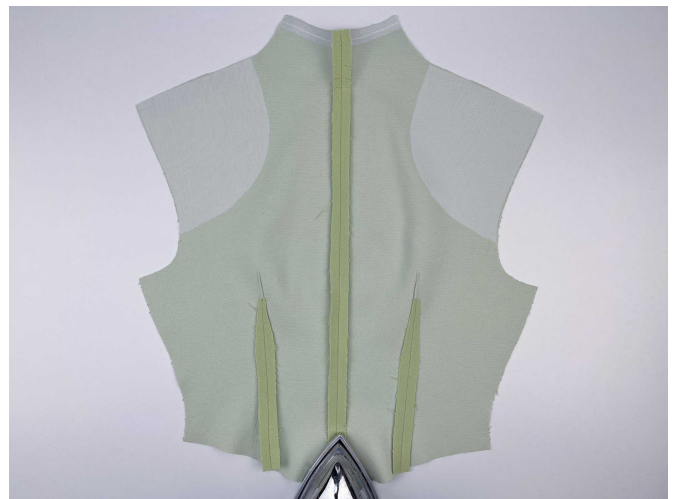

8. Press the center back seam allowances open.