

Viki

S E W S

SHIRT

EVAN



SIZES
38-54

DIFFICULTY
● ● ● ●

INTERMEDIATE



FROM THE FOUNDER OF THE VIKISEWS® BRAND



Back in 2016, when I started making my first sewing patterns and instruction manuals, my main goal was to solve the problems I personally faced at the beginning of my sewing journey: the lack of stylish patterns that provide a great fit and contain clear sewing instructions. That's how Vikisews was born—a brand designed to help you create fashionable, on-trend clothing with your own hands.



The sewing instructions we create is the result of our team's careful, meticulous work. May they help you develop your sewing hobby—or even turn it into your life's work! Enjoy every step of the sewing process and create a thoughtful, stylish wardrobe!

If you have any questions, we're always here to help: info@vikisews.com



EVAN PATTERN DESCRIPTION

Evan is a loose-fitting shirt with a straight silhouette. The shirt is designed to be worn over a t-shirt, long sleeve top, high-neck top, etc. There are patch pockets with flaps on the front. The double-layer back yoke extends onto the front. The shirt collar has a separate collar stand. The loose-fitting shirt sleeves are long. The sleeve slits are finished with plackets. At the bottom, each sleeve has a pleat and is finished with a cuff fastening with a button and buttonhole. The shirt fastens with buttons and buttonholes at the center front. The hemline is shaped. Evan is below-hip length.



PLEASE READ BEFORE USE

The contents of this pattern are copyright protected and belong exclusively to Vikisews. You may use Vikisews patterns for personal use. It is prohibited to share Vikisews patterns and instructions with third parties, as well as to publish patterns and instructions online for public access. **Non-compliance with the mentioned rules is a violation of the US copyright law and may result in civil liability and criminal prosecution.**

You may use Vikisews patterns for commercial use, to sew custom-made garments and/or create fashion collections, on the condition that the patterns are solely used in a manufacturing setting and are not further shared with individuals.

TOTAL EASE ALLOWANCE

	Chest ease	Waistline ease	Hipline ease	Upper arm ease
cm	26.6–27.2	39–39.6	17.8–28.1	19–22.5
inches	10 1/2–10 3/4	15 3/8–15 5/8	7–11 1/8	7 1/2–8 7/8

GARMENT LENGTH, SLEEVE LENGTH

Height, cm	Center back length, cm	Sleeve length including shoulder width and cuff, cm
1 (170–176)	77.8–79.5	80–82.3
2 (178–184)	80.8–82.5	82.2–84.5
3 (186–192)	83.8–85.5	84.4–86.6
4 (194–200)	86.8–88.5	86.6–88.8

Height, ft	Center back length, in	Sleeve length including shoulder width and cuff, in
1 (5'7"–5'9")	30 5/8–31 1/4	31 1/2–32 3/8
2 (5'10"–6')	31 3/4–32 1/2	32 3/8–33 1/4
3 (6'1"–6'3")	33–33 5/8	33 1/4–34 1/8
4 (6'4"–6'7")	34 1/8–34 7/8	34 1/8–35

SUGGESTED FABRIC

To sew this shirt, choose soft, pliable suiting fabrics made of natural, artificial, blended, or synthetic fibers.

The following fabrics are recommended: corduroy, loden, fleece, flannel, denim.

The shirt in the photo is made of flannel. The fabric is medium weight and non-stretch. The fiber content is: wool + polyester. The fabric weight is 290 g/m².

FABRIC AND NOTIONS REQUIREMENTS

1. Main fabric, 140 cm wide, with a directional print/nap, 250–300 g/m², in meters:

Height, cm	Size					
	34–40	42	44–46	48	50–52	54
1 (170–176)	1.9	1.95	2	2.25	2.3	2.35
2 (178–184)	1.95	2	2.05	2.3	2.35	2.4
3 (186–192)	2	2.05	2.1	2.4	2.4	2.45
4 (194–200)	2.05	2.1	2.15	2.45	2.5	2.5

Main fabric, 55" wide, with a directional print/nap, 250–300 g/m², in yards:

Height, ft	Size					
	34–40	42	44–46	48	50–52	54
1 (5'7"–5'9")	2 1/8	2 1/8	2 1/8	2 1/2	2 1/2	2 5/8
2 (5'10"–6')	2 1/8	2 1/8	2 1/4	2 1/2	2 5/8	2 5/8
3 (6'1"–6'3")	2 1/8	2 1/4	2 1/4	2 5/8	2 5/8	2 5/8
4 (6'4"–6'7")	2 1/4	2 1/4	2 3/8	2 5/8	2 3/4	2 3/4

Main fabric, 150 cm wide, with a directional print/nap, 250–300 g/m², in meters:

Height, cm	Size						
	34–42	44	46	48	50	52	54
1 (170–176)	1.8	1.8	1.85	1.9	1.95	2.2	2.25
2 (178–184)	1.85	1.9	1.9	1.95	2	2.25	2.3
3 (186–192)	1.9	1.95	2	2	2.05	2.3	2.35
4 (194–200)	1.95	2	2.05	2.01	2.1	2.4	2.4

Main fabric, 59" wide, with a directional print/nap, 250–300 g/m², in yards:

Height, ft	Size						
	34–42	44	46	48	50	52	54
1 (5'7"–5'9")	2	2	2	2 1/8	2 1/8	2 3/8	2 1/2
2 (5'10"–6')	2	2 1/8	2 1/8	2 1/8	2 1/8	2 1/2	2 1/2
3 (6'1"–6'3")	2 1/8	2 1/8	2 1/8	2 1/8	2 1/4	2 1/2	2 5/8
4 (6'4"–6'7")	2 1/8	2 1/8	2 1/4	2 1/4	2 1/4	2 5/8	2 5/8



IMPORTANT! If a plaid (striped) fabric is chosen as the main fabric, the fabric requirement increases by 2 pattern repeats.

IMPORTANT! When purchasing fabric, please account for shrinkage and buy 5% more than required.

2. Interfacing, knit or woven, 140 cm (55") wide, 40–45 g/m², for all sizes in all heights — 0.85 m (7/8 yd)
3. Stitched bias-cut fusible stay tape with stitch reinforcement, 1.5 cm (5/8") wide — 2 m (2 1/4 yd)
4. Nine buttons, 1.8 cm (3/4") in diameter
5. Matching thread — 5 spools (1 spool for the sewing machine + 4 spools for the overlocker)

TOOLS AND EQUIPMENT

- sewing machine for construction
- overlocker for finishing raw edges. This may be replaced with a stretch overlock stitch or a zigzag stitch on the sewing machine (overlock or zigzag stitch width 2–3 mm, stitch length 2.5 mm)
- buttonhole foot for the sewing machine
- one-sided foot for the sewing machine
- stitch-in-the-ditch foot for the sewing machine (optional)

PATTERN PIECES LIST

1. From main fabric:

- back – cut 1 on fold
- front – cut 2
- back yoke – cut 2
- undercollar – cut 1
- upper collar – cut 1
- collar stand – cut 2
- cuff – cut 2
- flap – cut 4
- sleeve – cut 2
- sleeve placket – cut 2
- patch pocket – cut 2

Attention! If the fabric used for sewing the garment has a pattern repeat, to match the design on the flap pieces, sleeve placket, and cuffs, these should be cut last in accordance with the pattern on the front and sleeve pieces.

***IMPORTANT!** Don't forget to transfer all pattern markings and notches onto the fabric.*

2. From interfacing:

- undercollar – cut 1
- upper collar – cut 1
- collar stand – cut 2
- cuff – cut 2
- flap – cut 4
- sleeve placket – cut 2

Additionally, cut 2 strips of interfacing, 5 cm (2") wide and as long as the placket on the front piece. The interfacing strips should be cut on the straight grain (parallel to the selvedge).


SEAM ALLOWANCES

All pattern pieces include 1 cm (3/8") seam allowances.

Take this into account when laying out the pattern pieces on the fabric.


CUTTING LAYOUT

Main fabric, 140 cm (55") wide, with a directional print/nap,
cut on fold, for sizes 38–46 in all heights

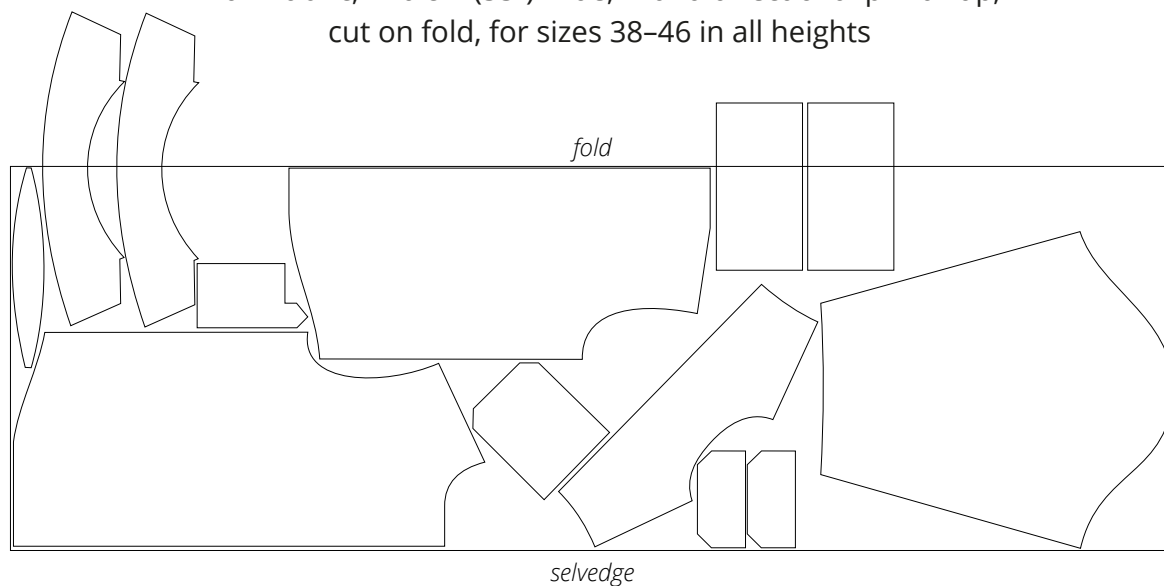


Attention! Cut the upper collar, undercollar, and cuff pieces on a single layer out of the leftover fabric.

Main fabric, 140 cm (55") wide, with a directional print/nap,
cut on fold, for sizes 48–54 in all heights

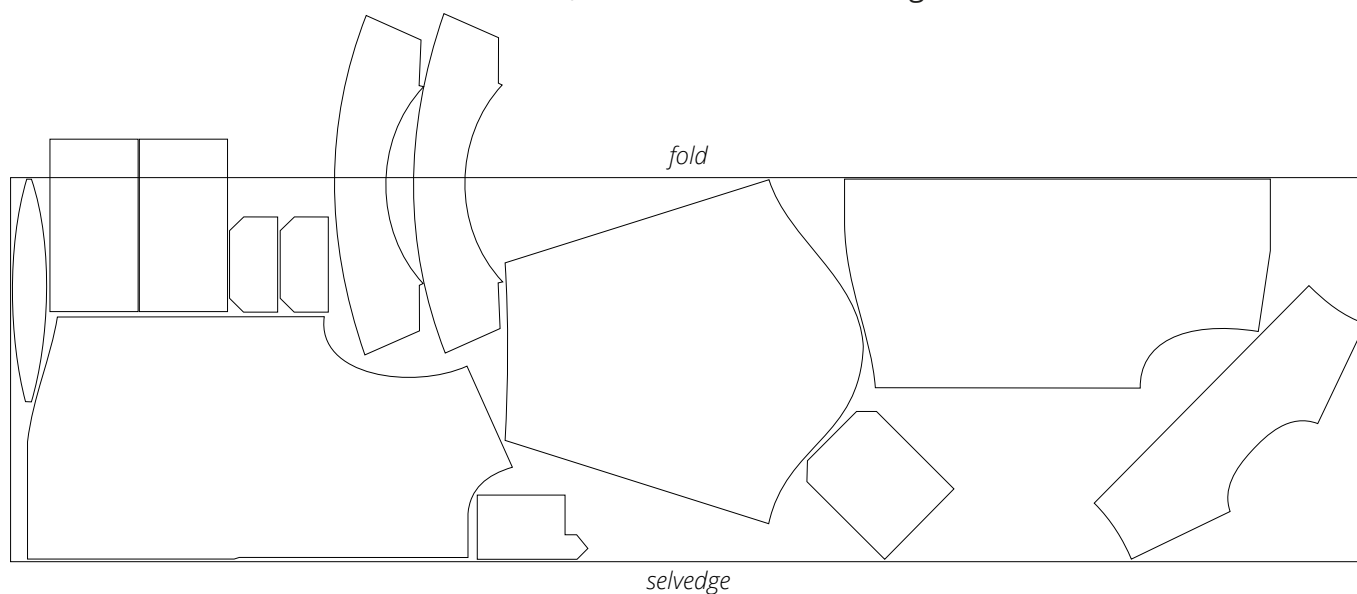


Attention! Cut the upper collar, undercollar, and cuff pieces on a single layer out of the leftover fabric.

Main fabric, 150 cm (59") wide, with a directional print/nap,
cut on fold, for sizes 38–50 in all heights

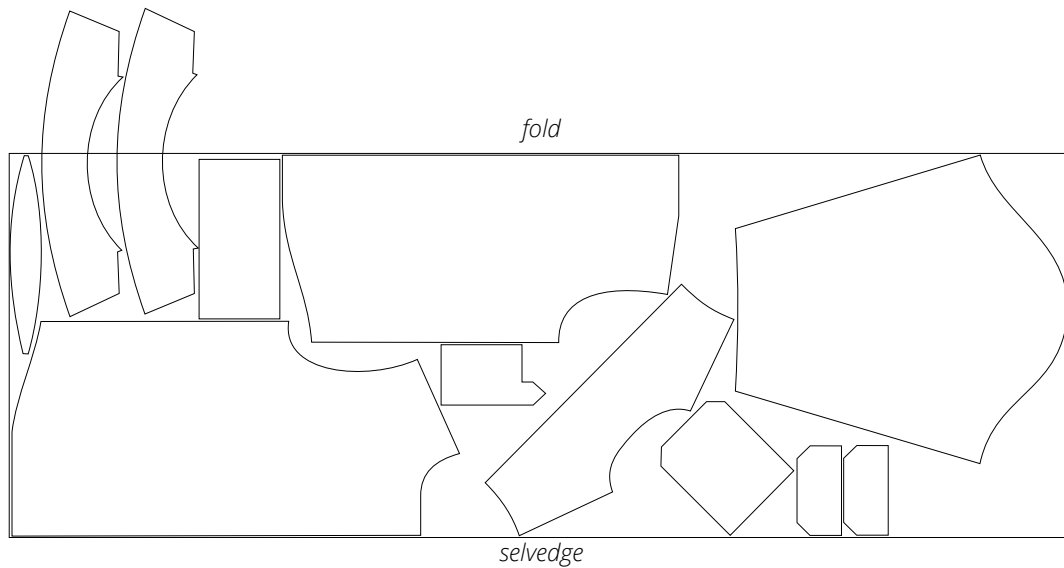


Attention! Cut the upper collar, undercollar, and cuff pieces on a single layer out of the leftover fabric.

Main fabric, 150 cm (59") wide, with a directional print/nap,
cut on fold, for sizes 52–54 in all heights

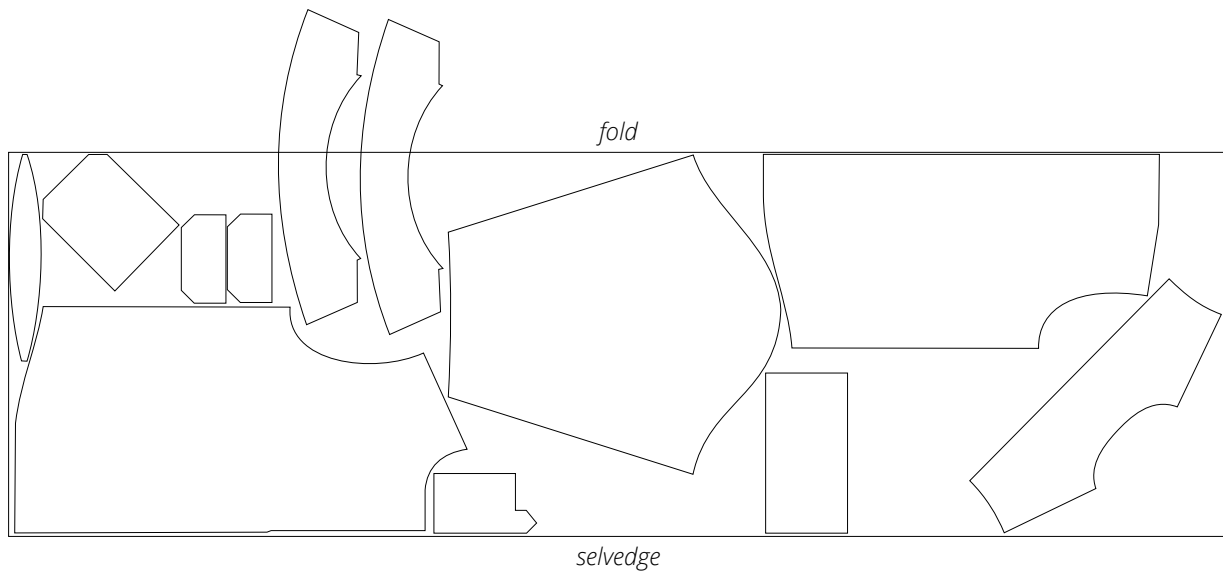


Attention! Cut the upper collar and undercollar pieces on a single layer out of the leftover fabric.

Interfacing, 140 cm (55") wide, cut on fold,
for all sizes in all heights

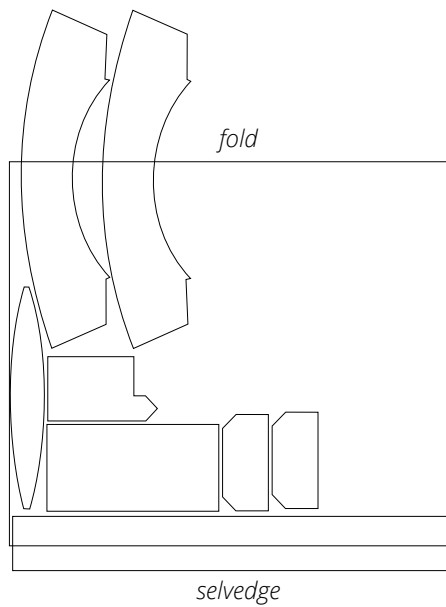

Attention! Cut the upper collar and undercollar pieces on a single layer out of the leftover fabric.

READY? LET'S GET SEWING!

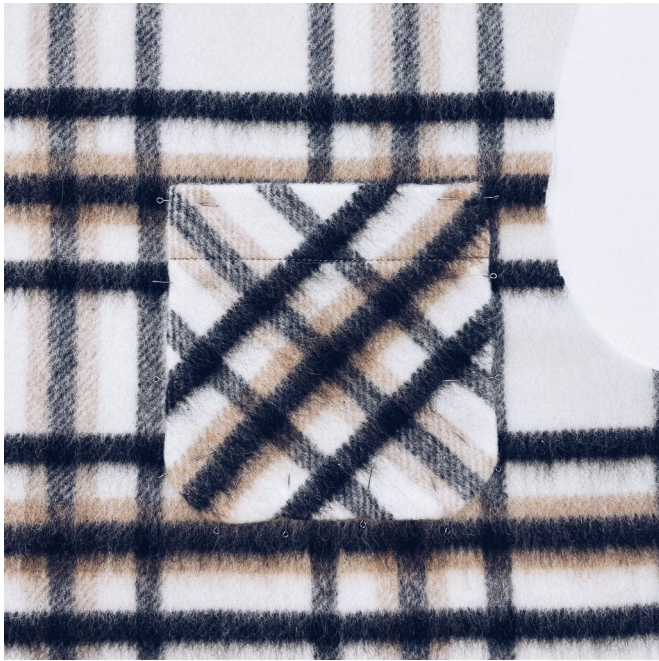

Working on the right side of the front piece, place the pocket pieces following the pattern markings, and pin.



Topstitch the pocket piece to the front close to the edge, backstitching at the beginning and end of the seam.



Press the pocket.