


Viki

S E W S

PANTS

TED

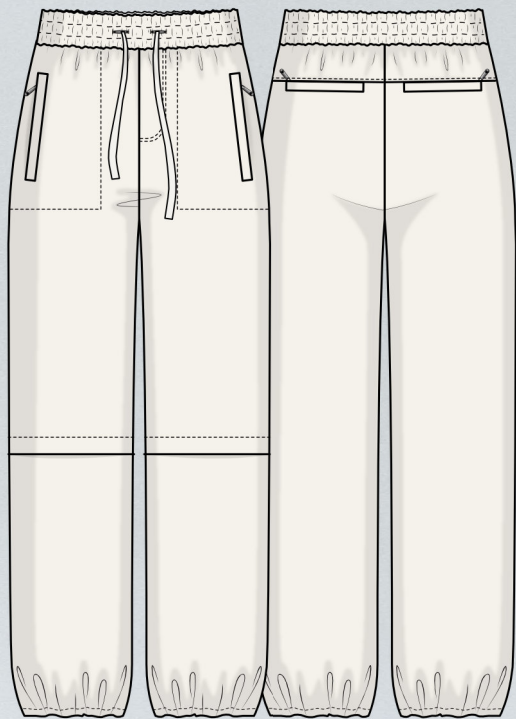

SIZES
38-54

DIFFICULTY
● ● ● ●

INTERMEDIATE



FROM THE FOUNDER OF THE VIKISEWS® BRAND




Back in 2016, when I started making my first sewing patterns and instruction manuals, my main goal was to solve the problems I personally faced at the beginning of my sewing journey: the lack of stylish patterns that provide a great fit and contain clear sewing instructions. That's how Vikisews was born—a brand designed to help you create fashionable, on-trend clothing with your own hands.



The sewing instructions we create is the result of our team's careful, meticulous work. May they help you develop your sewing hobby—or even turn it into your life's work! Enjoy every step of the sewing process and create a thoughtful, stylish wardrobe!

If you have any questions, we're always here to help: info@vikisews.com

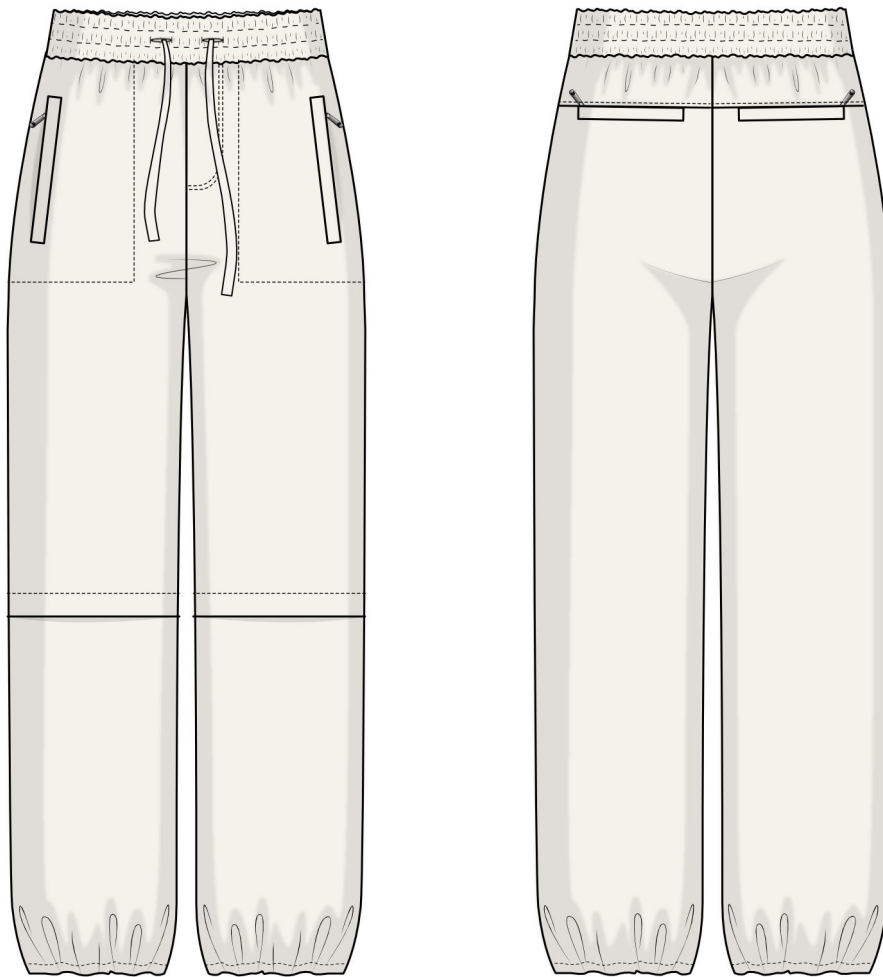

TED PATTERN DESCRIPTION

Ted is a pair of loose-fitting, straight-cut pants. The applied elasticated waistband is decorated with two rows of topstitching that form a casing with a cord threaded through it. There are welt zipper pockets on the front and back. The pants feature a faux fly front, and a topstitched back yoke. An elastic cord with a stopper is threaded through the casing at the garment hem. The pants are ankle-length.



PLEASE READ BEFORE USE

The contents of this pattern are copyright protected and belong exclusively to Vikisews. You may use Vikisews patterns for personal use. It is prohibited to share Vikisews patterns and instructions with third parties, as well as to publish patterns and instructions online for public access. **Non-compliance with the mentioned rules is a violation of the US copyright law and may result in civil liability and criminal prosecution.**

You may use Vikisews patterns for commercial use, to sew custom-made garments and/or create fashion collections, on the condition that the patterns are solely used in a manufacturing setting and are not further shared with individuals.

TOTAL EASE ALLOWANCE

	Waistline ease	Hipline ease
cm	25.5–36.5	9–15
inches	10–14 3/8	3 1/2–5 7/8

GARMENT LENGTH, FINISHED HEM WIDTH

Height, cm	Garment length including waistband, cm	Finished hem width, cm
1 (170–176)	113	26.8–30
2 (178–184)	117	26.8–30
3 (186–192)	121	26.8–30
4 (194–200)	125	26.8–30

Height, ft	Garment length including waistband, in	Finished hem width, in
1 (5'7"–5'9")	44 1/2	10 1/2–11 3/4
2 (5'10"–6')	46 1/8	10 1/2–11 3/4
3 (6'1"–6'3")	47 5/8	10 1/2–11 3/4
4 (6'4"–6'7")	49 1/4	10 1/2–11 3/4

SUGGESTED FABRIC

To sew these pants, choose medium-weight, soft, non-stretch, opaque outerwear and raincoat fabrics made of natural, artificial, blended, or synthetic fibers.

The following fabrics are recommended: raincoat fabrics, dewspo, taslan, and gabardine.

The pants in the photo are made of gabardine. The fabric is medium weight, soft, and low-stretch. The fiber content is 60% polyester + 40% cotton. The fabric weight is 280 g/m².

FABRIC AND NOTIONS REQUIREMENTS

1. Main fabric, 140 cm wide, with a directional print/nap, in meters:

Height, cm	Size			
	38-40	42	44-48	50-54
1 (170-176)	2.1	2.15	2.25	2.3
2 (178-184)	2.15	2.2	2.3	2.4
3 (186-192)	2.25	2.3	2.4	2.5
4 (194-200)	2.3	2.35	2.45	2.55

Main fabric, 55" wide, with a directional print/nap, in yards:

Height, ft	Size			
	38-40	42	44-48	50-54
1 (5'7"-5'9")	2 1/4	2 3/8	2 1/2	2 1/2
2 (5'10"-6')	2 3/8	2 3/8	2 1/2	2 5/8
3 (6'1"-6'3")	2 1/2	2 1/2	2 5/8	2 3/4
4 (6'4"-6'7")	2 1/2	2 5/8	2 5/8	2 3/4

2. Lining fabric, 140 cm (55") wide, with a directional print — 0.4 m (3/8 yd) for all sizes in all heights.

IMPORTANT! When purchasing fabric, please account for shrinkage and buy 5% more than required.

3. Lightweight interfacing, knit or woven, 140 cm (55") wide, for all sizes in all heights — 0.25 m (1/4 yd).

4. Stitched bias-cut fusible stay tape with stitch reinforcement, 1 cm (3/8") wide — 46 cm (18 1/8").

5. Four zippers, 20 cm (8") long, for all sizes in all heights.

6. Drawstring cord for the waistband, 5-7 mm in diameter, for all heights, in meters:

Size	38	40	42	44	46	48	50	52	54
cm	1.46	1.5	1.54	1.58	1.62	1.66	1.70	1.74	1.78
yards	1 5/8	1 5/8	1 5/8	1 3/4	1 3/4	1 7/8	1 7/8	1 7/8	2

7. Two cord end caps.

8. Elastic, 4.5 cm (1 3/4") wide, depending on the size. The exact elastic length is specified in the pattern.

Size	38	40	42	44	46	48	50	52	54
cm	71.9	75.6	79.3	83	86.6	90.3	94	97.7	101.4
yards	28 1/4	29 3/4	31 1/4	32 5/8	34 1/8	35 1/2	37	38 1/2	39 7/8

9. Elastic round cord, 0.3 cm (1/8") in diameter, for all heights (including seam allowances):

Size	38	40	42	44	46	48	50	52	54
cm	123.2	124.8	126.4	128	129.6	131.2	132.8	134.4	136
yards	48 1/2	49 1/8	49 3/4	50 3/8	51	51 5/8	52 1/4	52 7/8	53 1/2

10. Two double-hole stoppers for elastic cord.

11. Matching thread — 5 spools (1 spool for the sewing machine + 4 spools for the overlocker).

TOOLS AND EQUIPMENT

- sewing machine for construction
- overlocker for finishing raw edges. This may be replaced with a stretch overlock stitch or a zigzag stitch on the sewing machine (overlock or zigzag stitch width 2–3 mm, stitch length 2.5 mm)
- buttonhole foot for the sewing machine
- one-sided foot for attaching the zipper
- elastic threader (may be replaced with a safety pin)

PATTERN PIECES LIST

1. From main fabric:

- back leg – cut 2
- waistband – cut 1
- back yoke – cut 2
- front pocket welt – cut 2
- back pocket welt – cut 2
- front pocket facing – cut 2
- front pocket lining – cut 2
- front pocket zipper binding – cut 2
- back pocket zipper binding – cut 2
- back pocket facing – cut 2
- back pocket lining – cut 2
- loop – cut 1 (2 pieces)

IMPORTANT! Don't forget to transfer all pattern markings and notches onto the fabric.

2. From lining fabric:

- front pocket facing – cut 2
- back pocket lining – cut 2

3. From interfacing:

- front pocket welt – cut 2
- back pocket welt – cut 2

Additionally, cut the following from interfacing:

- two strips, width and length according to the pattern, to interface the pocket opening section on the front leg piece
- six square pieces 2×2 cm (3/4" by 3/4") to interface the buttonhole section on the waistband, front leg and back leg pieces.

SEAM ALLOWANCES


All pattern pieces include seam allowances as follows:

- garment hem allowance — 3 cm (1 1/8")
- pocket lining curved edges — 1.5 cm (5/8")
- all other edges — 1 cm (3/8")

Take this into account when laying out the pattern pieces on the fabric.


CUTTING LAYOUT

Main fabric, 140 cm (55") wide, with a directional print/nap,
cut on fold, for sizes 38–40 in all heights

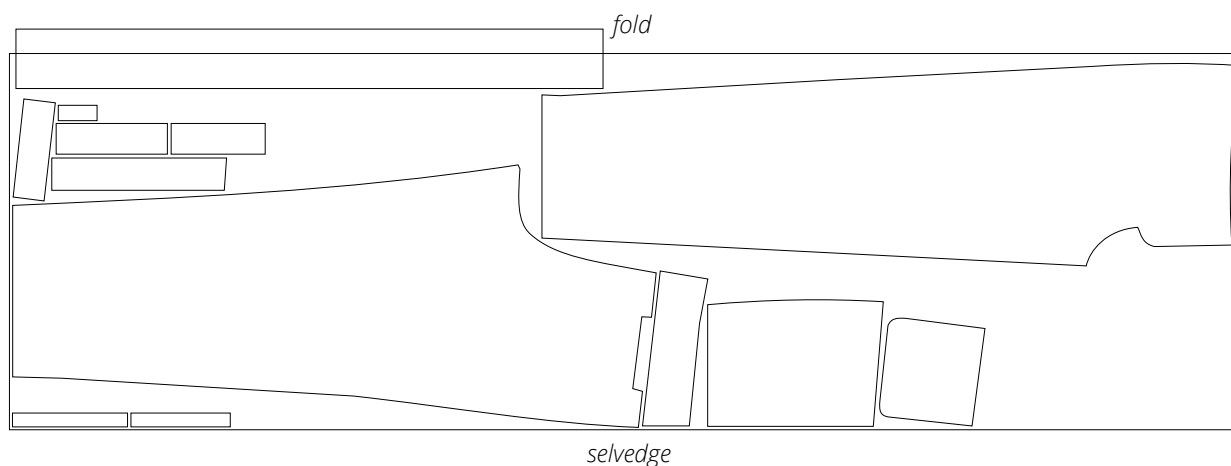


Attention! The waistband piece is cut on a single layer out of the leftover fabric.
Cut only one loop piece.

Main fabric, 140 cm (55") wide, with a directional print/nap,
cut on fold, for sizes 42–48 in all heights

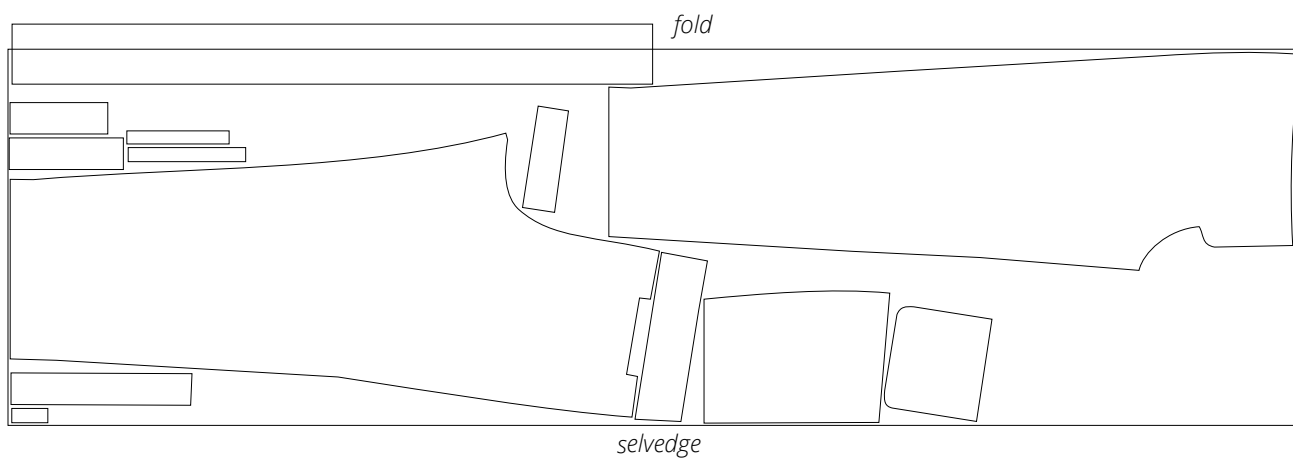


Attention! The waistband piece is cut on a single layer out of the leftover fabric.
Cut only one loop piece.

Main fabric, 140 cm (55") wide, with a directional print/nap,
cut on fold, for sizes 50–54 in all heights

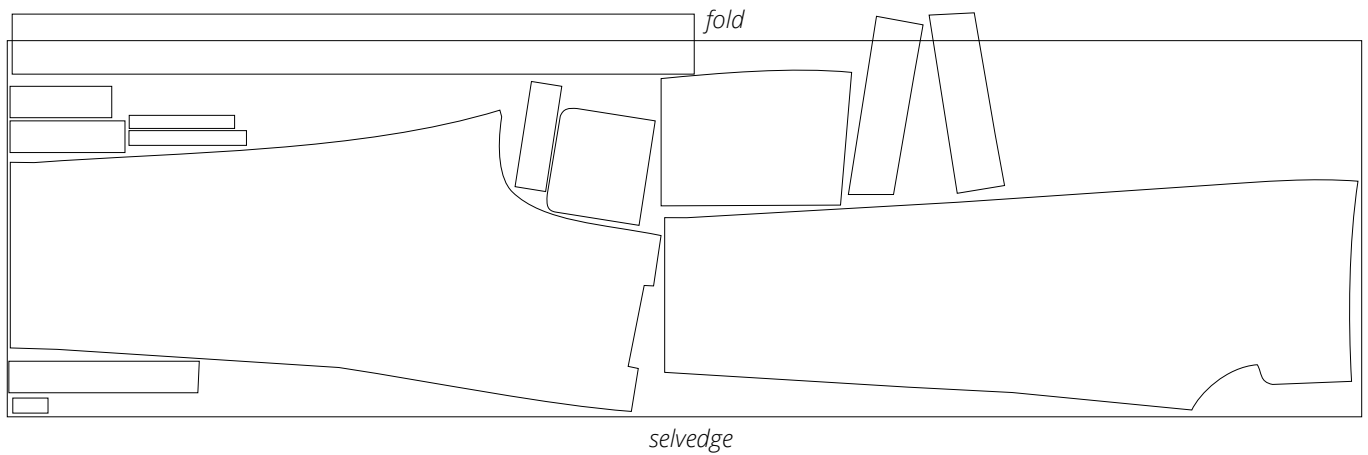


Attention! The waistband piece is cut on a single layer out of the leftover fabric.
Cut only one loop piece.


Lining fabric, 140 cm (55") wide,
with a directional print, cut on a partial fold,
for all sizes in all heights

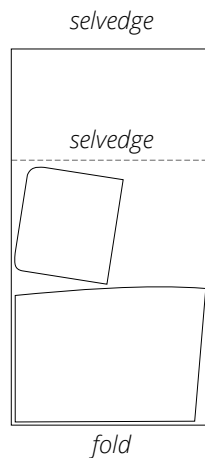

Interfacing, 140 cm (55") wide,
cut on a partial fold and in one direction,
for all sizes in all heights

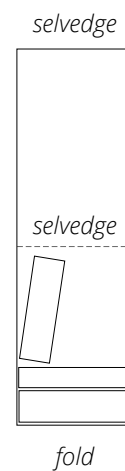

READY? LET'S GET SEWING!

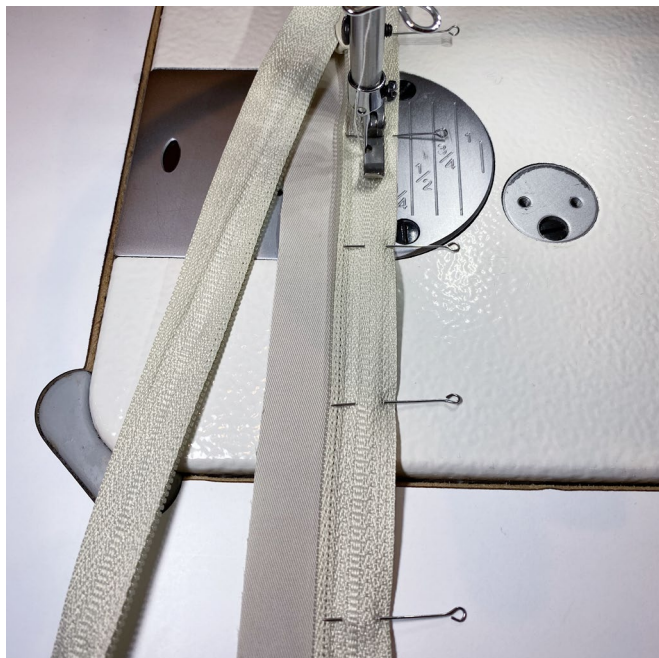

Machine-stitch at 1 cm (3/8") from the edge using a one-sided foot, backstitching at the beginning and end of the seam.



Press the seam flat. Press the seam allowances towards the pocket zipper binding.



Working on the right side, machine-stitch the seam allowances onto the binding at 1-2 mm from the seam.