

# FROM THE FOUNDER OF THE VIKISEWS® BRAND

---



Back in 2016, when I started making my first sewing patterns and instruction manuals, my main goal was to solve the problems I personally faced at the beginning of my sewing journey: the lack of stylish patterns that provide a great fit and contain clear sewing instructions. That's how Vikisews was born—a brand designed to help you create fashionable, on-trend clothing with your own hands.



The sewing instructions we create is the result of our team's careful, meticulous work. May they help you develop your sewing hobby—or even turn it into your life's work! Enjoy every step of the sewing process and create a thoughtful, stylish wardrobe!

If you have any questions, we're always here to help: [info@vikisews.com](mailto:info@vikisews.com)



## AVITAL PATTERN DESCRIPTION

---

Avital is a semi-fitted lined blazer with an accentuated waist. The front is fitted with princess seams. The back is fitted with a center seam and princess seams. There is decorative trim topstitched to the front and sleeves. The garment features a stand collar and long, set-in, two-piece sleeves. The center front toggle closure fastens with buttons and button loops made of decorative trim. There are buttons at the outer ends of the decorative trim. Avital is below-waist length.



## PLEASE READ BEFORE USE

---

The contents of this pattern are copyright protected and belong exclusively to Vikisews. You may use Vikisews patterns for personal use. It is prohibited to share Vikisews patterns and instructions with third parties, as well as to publish patterns and instructions online for public access. **Non-compliance with the mentioned rules is a violation of the US copyright law and may result in civil liability and criminal prosecution.**

You may use Vikisews patterns for commercial use, to sew custom-made garments and/or create fashion collections, on the condition that the patterns are solely used in a manufacturing setting and are not further shared with individuals.

# TOTAL EASE ALLOWANCE

---

	Bust ease	Waistline ease	Upper arm ease
cm	12.1–5.1	10.2–1.7	8.6–5.5
inches	4 3/4–2	4–5/8	3 3/8–2 1/8

# GARMENT LENGTH, SLEEVE LENGTH

---

Height, cm	Center back length, cm	Sleeve length, cm
1 (154–160)	45.5–44.4	59.3 – 61.1
2 (162–168)	48.5–47.4	61.3 – 63.1
3 (170–176)	51.5–50.4	63.3 – 65.1
4 (178–184)	54.5–53.4	65.3 – 67.1

Height, ft	Center back length, in	Sleeve length, in
1 (5'1"–5'3")	17 7/8–17 1/2	23 3/8–24
2 (5'4"–5'6")	19 1/8–18 5/8	24 1/8–24 7/8
3 (5'7"–5'9")	20 1/4–19 7/8	24 7/8–25 5/8
4 (5'10"–6'1")	21 1/2–21	25 3/4–26 3/8

# SUGGESTED FABRICS

---

To sew this blazer, choose dense, structured, non-stretch or low-stretch suiting fabrics made of natural fibers, artificial fibers, blends, or synthetic fibers.

The following fabrics are recommended: gabardine, velvet, wool suiting.

For the lining, use lining fabrics made of artificial fibers, blends, or synthetic fibers.

The blazer in the photo is made of cotton velvet. The fabric is medium weight, soft, and non-stretch. The fiber content is 100% cotton. The fabric weight is 270 g/m<sup>2</sup>. The lining is 100% viscose. The fabric weight is 100 g/m<sup>2</sup>.

# FABRIC AND NOTIONS REQUIREMENTS

1. Main fabric, 140 cm wide, with a directional print/nap, in meters:

Height, cm	Size			
	34-36	38	40-46	48-52
1 (154-160)	1.15	1.2	1.25	1.35
2 (162-168)	1.2	1.2	1.3	1.4
3 (170-176)	1.25	1.3	1.35	1.45
4 (178-184)	1.35	1.35	1.4	1.5

Main fabric, 55" wide, with a directional print/nap, in yards:

Height, ft	Size		
	34-48	40-46	48-52
1 (5'1"-5'3")	1 1/4	1 3/8	1 1/2
2 (5'4"-5'6")	1 1/4	1 3/8	1 1/2
3 (5'7"-5'9")	1 3/8	1 1/2	1 5/8
4 (5'10"-6'1")	1 1/2	1 1/2	1 5/8

2. Lining fabric, 140 cm wide, with a directional print, in meters:

Height, cm	Size			
	34-36	38-46	48	50-52
1 (154-160)	1	1.05	1.1	1.1
2 (162-168)	1.05	1.1	1.1	1.15
3 (170-176)	1.1	1.15	1.15	1.2
4 (178-184)	1.15	1.2	1.2	1.2

Lining fabric, 55" wide, with a directional print, in yards:

Height, ft	Size		
	34-36	38-46	48-52
1 (5'1"-5'3")	1 1/8	1 1/8	1 1/4
2 (5'4"-5'6")	1 1/8	1 1/4	1 1/4
3 (5'7"-5'9")	1 1/4	1 1/4	1 1/4
4 (5'10"-6'1")	1 1/4	1 1/4	1 1/4

3. Lightweight interfacing, knit or woven, 140 cm wide, in meters:

Height, cm	Size	
	34-42	44-52
1 (154-160)	0.95	1.05
2 (162-168)	1	1.1
3 (170-176)	1.05	1.15
4 (178-184)	1.1	1.2

Lightweight interfacing, knit or woven, 55" wide, in yards:

Height, ft	Size	
	34-42	44-52
1 (5'1"-5'3")	1	1 1/8
2 (5'4"-5'6")	1 1/8	1 1/4
3 (5'7"-5'9")	1 1/8	1 1/4
4 (5'10"-6'1")	1 1/4	1 1/4

4. Stitched bias-cut fusible stay tape with stitch reinforcement, 1.5 cm (5/8") wide — 3.2 m (3 1/2 yd).
5. Gimp braid trim for the toggle closure, 1–1.2 cm (3/8–1/2") wide:

Size	36	36	38	40	42	44	46	48	50	52
meters	5.5	5.6	5.7	5.8	5.9	6	6.1	6.3	6.4	6.5
yards	6	6 1/8	6 1/4	6 3/8	6 1/2	6 1/2	6 5/8	6 7/8	7	7 1/8

***IMPORTANT!** When purchasing fabric, please account for shrinkage and buy 5% more than required.*

6. Twenty one buttons, 2–2.2 cm (3/4–7/8") in diameter.
7. One pair of shoulder pads, 1.5 cm (5/8") thick.
8. One pair of sleeve heads.
9. Matching thread — 1 spool for the sewing machine.

## TOOLS AND EQUIPMENT

- sewing machine for construction
- stitch-in-the-ditch foot for the sewing machine (optional)
- one-sided foot for the sewing machine

# PATTERN PIECES LIST

---

## 1. From main fabric:

- center front — cut 2
- side front — cut 2
- center back — cut 2
- side back — cut 2
- outer stand collar — cut 1
- inner stand collar — cut 1
- top sleeve — cut 2
- bottom sleeve — cut 2
- front facing — cut 2
- back neck facing — cut 1
- placket — cut 1

## 2. From lining fabric:

- front lining — cut 2
- back lining — cut 1 on fold
- top sleeve lining — cut 2
- bottom sleeve lining — cut 2

***IMPORTANT!** Don't forget to transfer all pattern markings and notches onto the fabric.*

## 3. From interfacing:

- center front — cut 2
- side front — cut 2
- center back — cut 2
- side back — cut 2
- outer stand collar — cut 1
- inner stand collar — cut 1
- front facing — cut 2
- back neck facing — cut 1
- placket — cut 1

# SEAM ALLOWANCES

---

All pattern pieces include seam allowances as follows:


- garment hem allowance — 4 cm (1 5/8")
- sleeve hem allowance — 4 cm (1 5/8")
- all other edges — 1 cm (3/8")

Take this into account when laying out the pattern pieces on the fabric.

# CUTTING LAYOUT


---

Main fabric, 140 cm (55") wide, with a directional print/nap, cut on fold,  
for sizes 34–38 in all heights

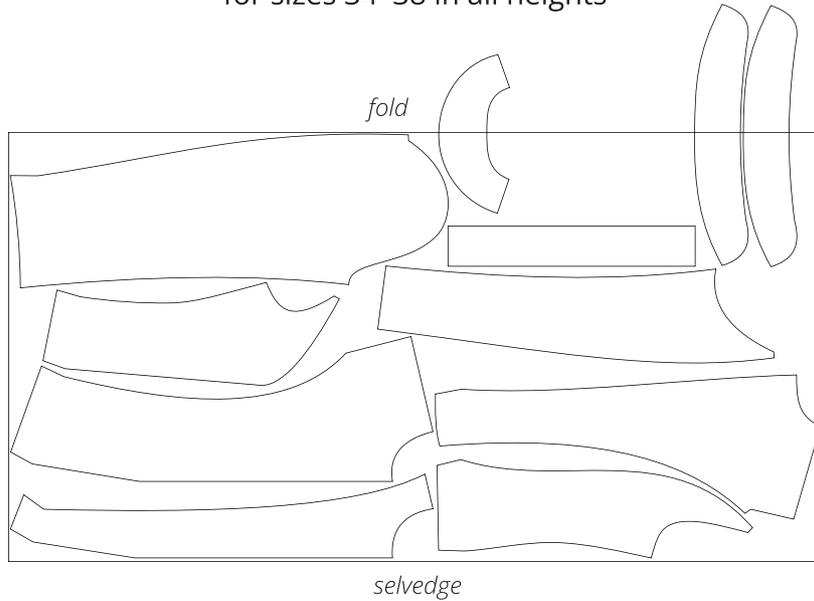


**Attention!** Cut one each of the inner stand collar, outer stand collar,  
and back neck facing pieces on a single layer out of the leftover fabric.  
Cut only one placket piece.

Main fabric, 140 cm (55") wide, with a directional print/nap, cut on fold,  
for sizes 40–46 in all heights

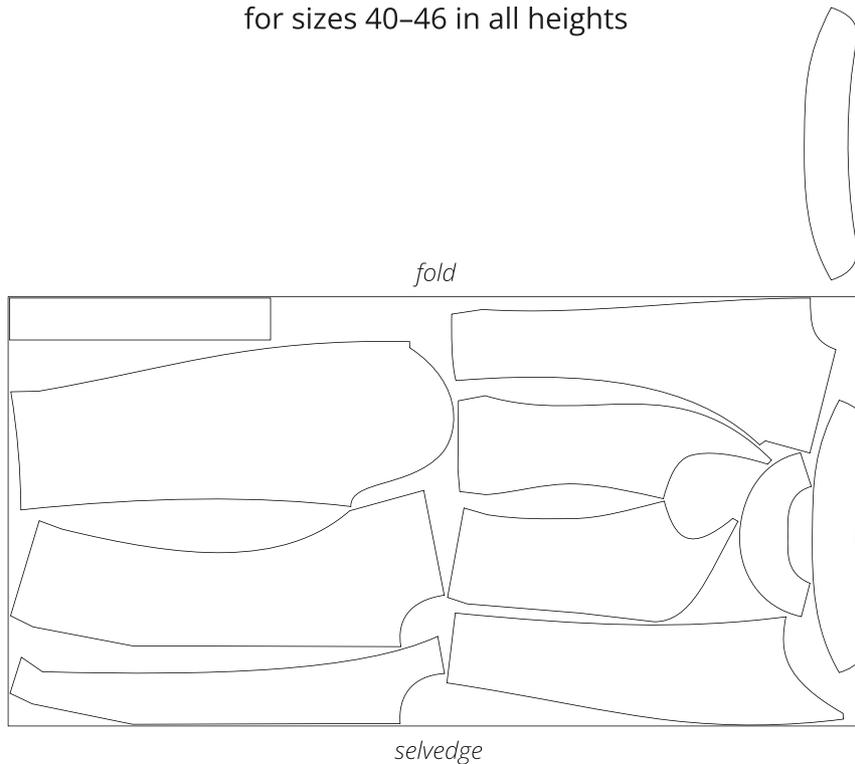


**Attention!** Cut only one inner stand collar piece on a single layer out of the leftover fabric.  
Cut one each of the outer stand collar, back neck facing, and placket pieces.

Main fabric, 140 cm (55") wide, with a directional print/nap, cut on fold,  
for sizes 48–52 in all heights

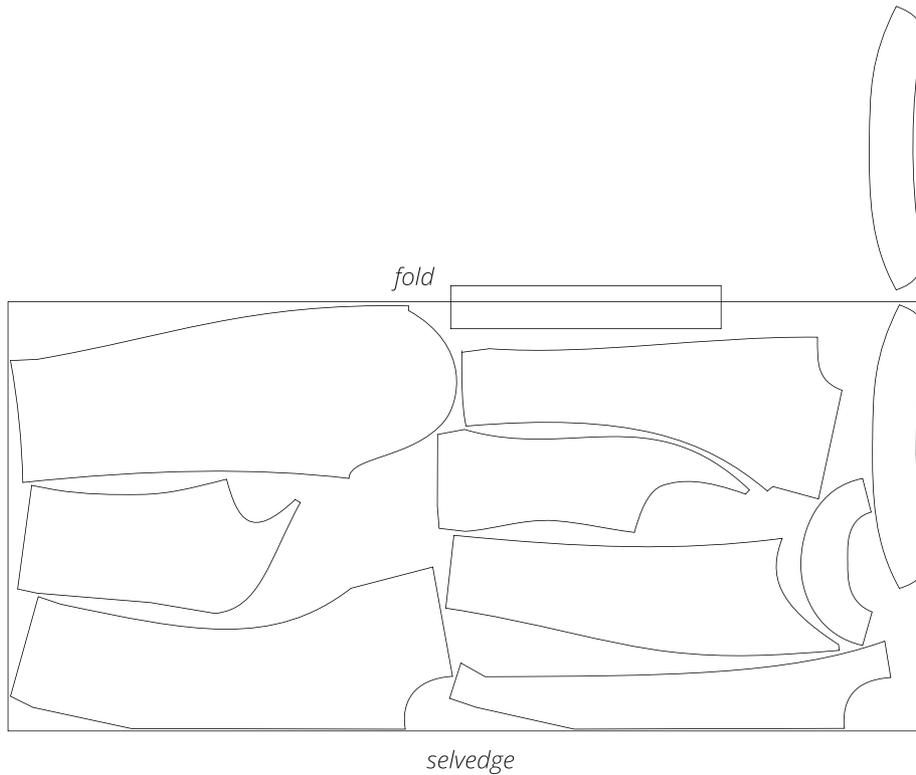


**Attention!** Cut one each of the inner stand collar and placket pieces on a single layer out of the leftover fabric. Cut one each of the outer stand collar and back neck facing pieces.


Lining fabric, 140 cm (55") wide, with a directional print, cut on fold,  
for sizes 34–40 in all heights

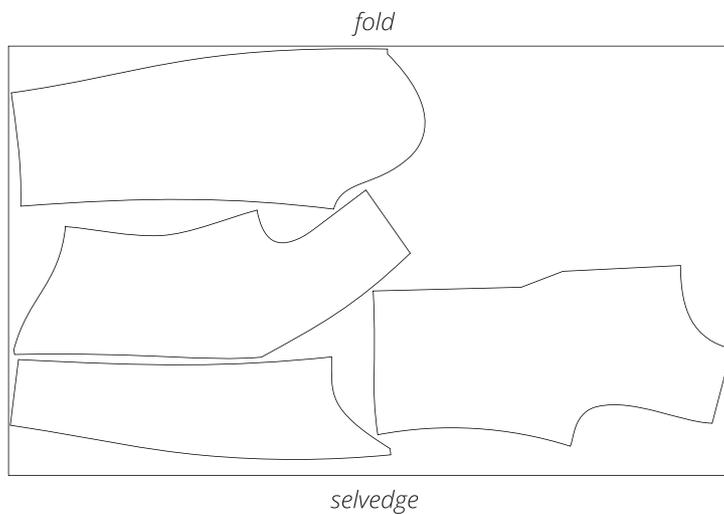

Lining fabric, 140 cm (55") wide, with a directional print, cut on fold,  
for sizes 42-52 in all heights

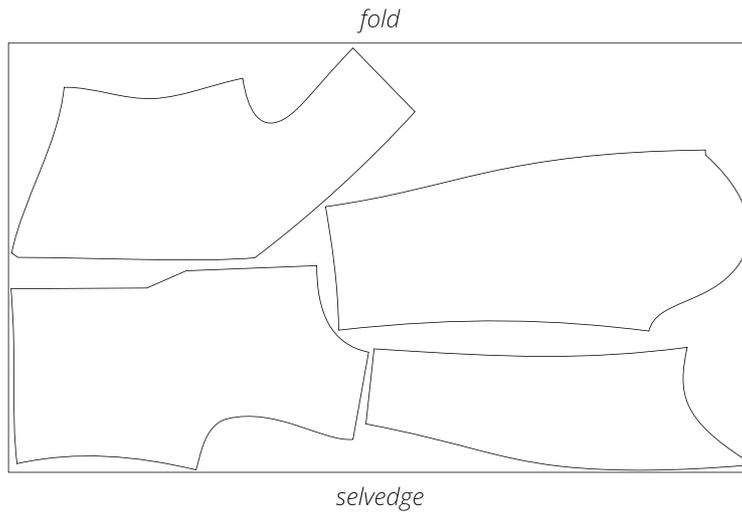


Interfacing, 140 cm (55") wide, cut on fold,  
for sizes 34-42 in all heights

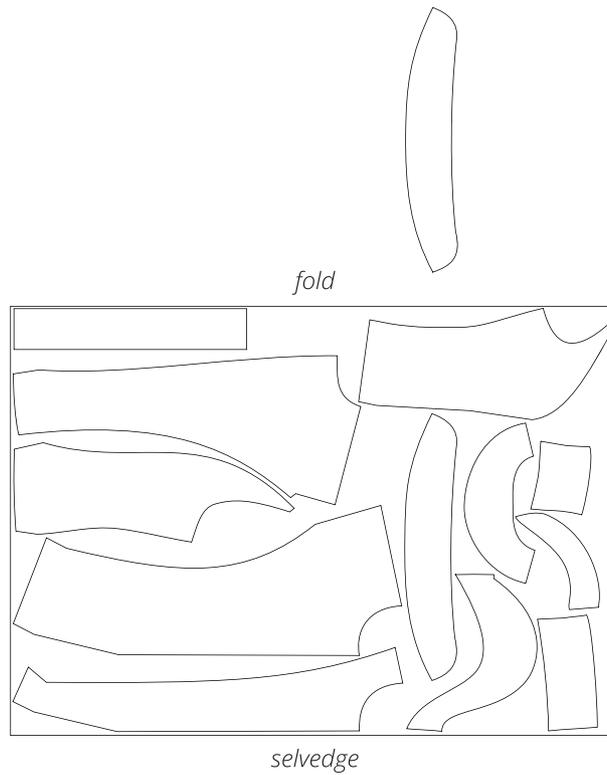

**Attention !** Cut only one inner stand collar piece on a single layer out of the leftover fabric.  
Cut one each of the outer stand collar, back neck facing, and placket pieces.


Interfacing, 140 cm (55") wide, cut on fold,  
for sizes 44-52 in all heights

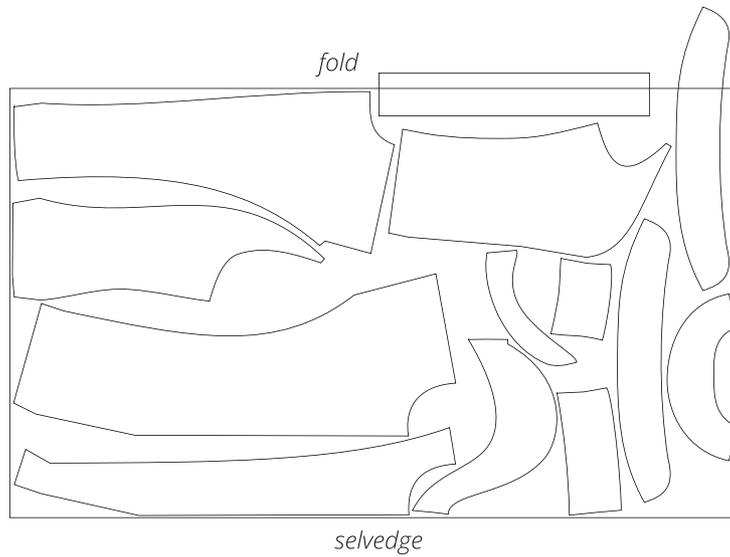

**Attention !** Cut one each of the inner stand collar and placket pieces on a single layer out of the leftover fabric. Cut one each of the outer stand collar and back neckline facing pieces.

**READY? LET'S GET SEWING!**

---

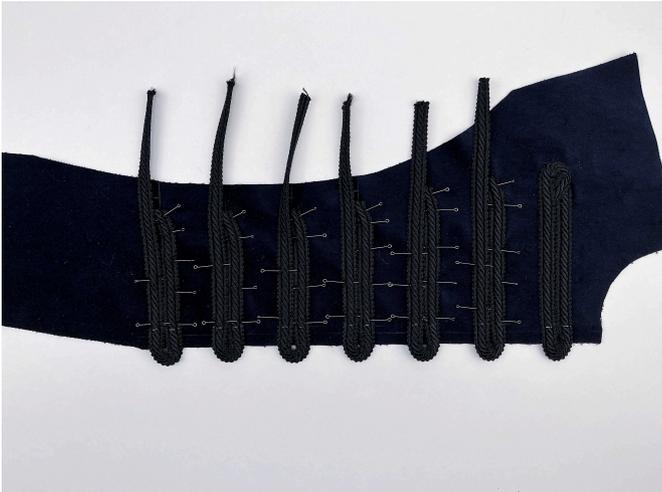

9. On the right side of the right center front piece, place and pin the fastening elements, following the pattern markings and forming a loop at the front edge. The loop size depends on the braid trim width and button diameter.



10. Arrange the inner side of the braid trim elements on the right center front piece similarly to the left center front piece. Pin in place.



11. Topstitch the trim at 1–2 mm from the inner and outer edges. Backstitch at the beginning and end of the seam.



12. Machine-stitch the loops on the right center front piece at 1.5 cm (5/8") from the front edge, going back and forth three times.